


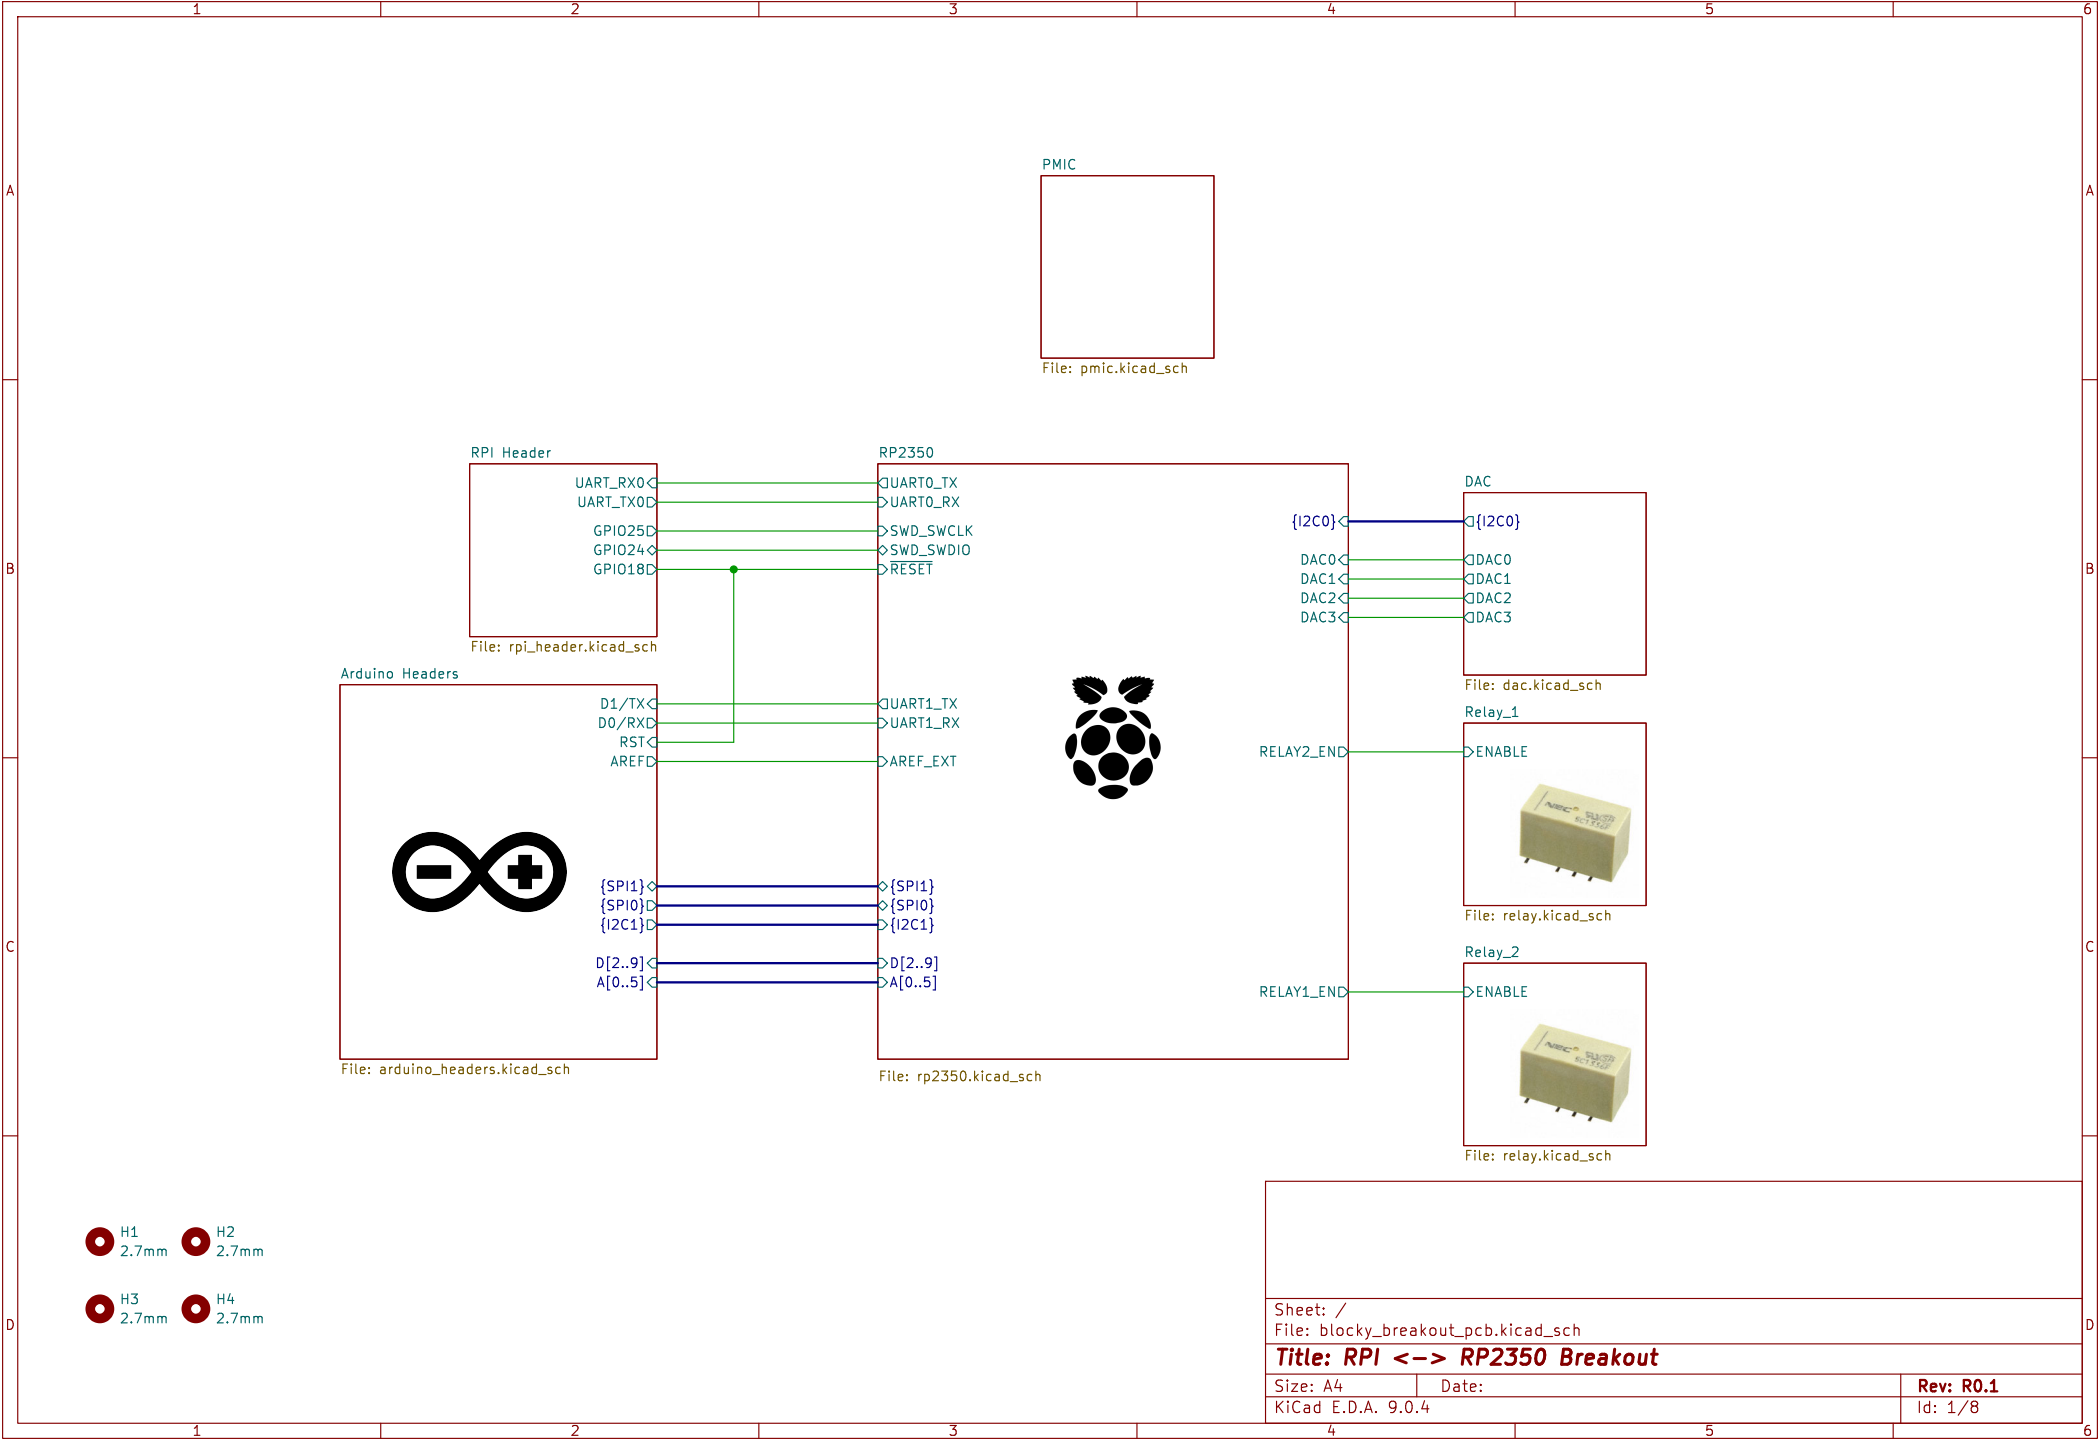



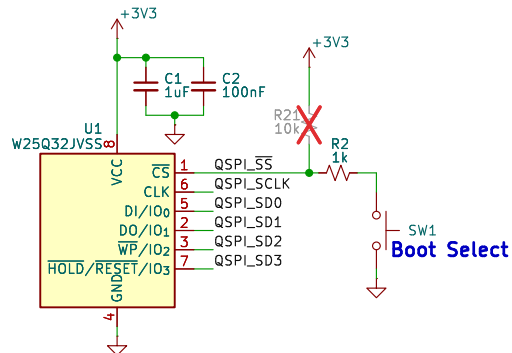


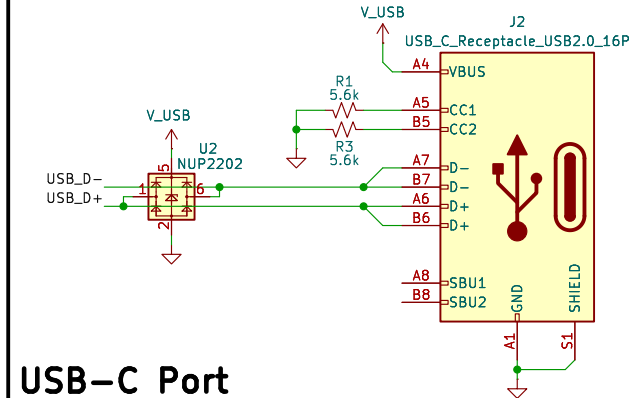

Flash Memory

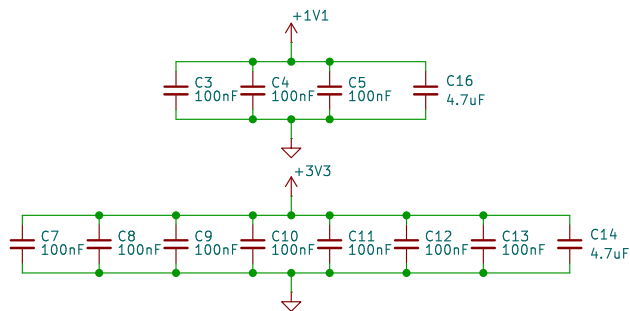



USB-C Port

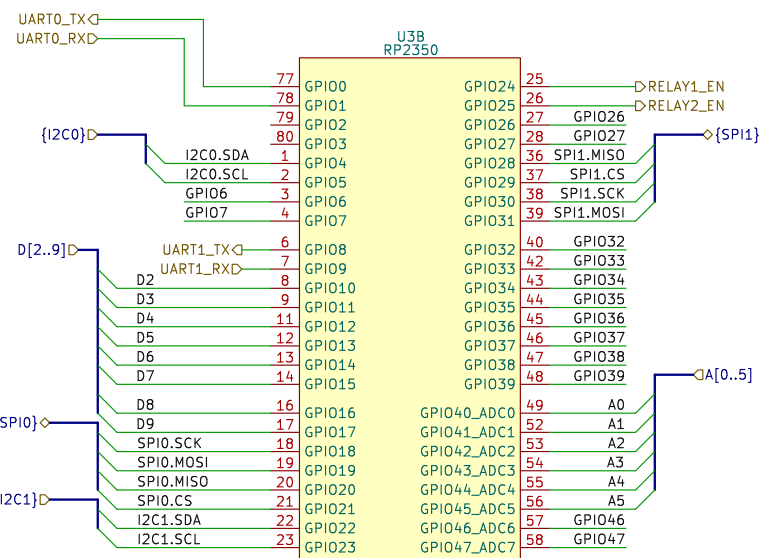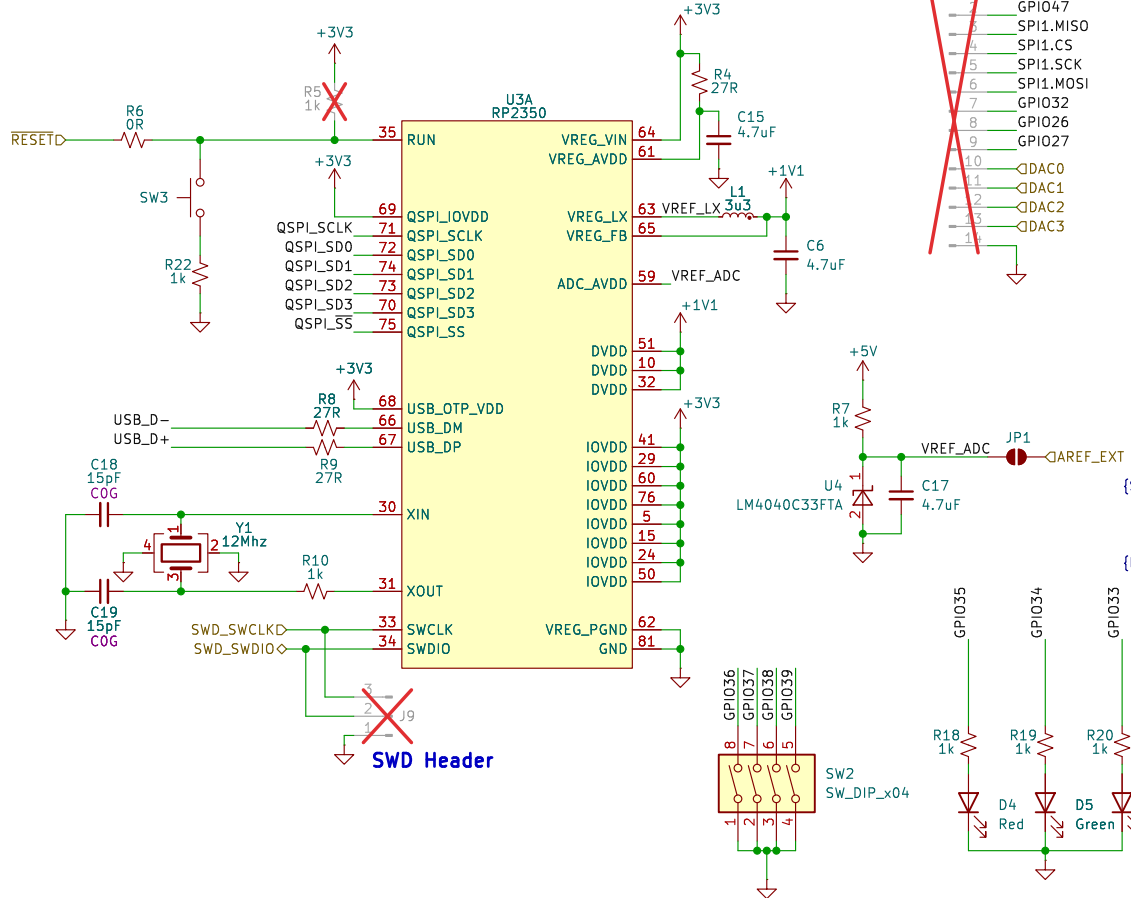


Sheet: /RP2350/		
File: rp2350.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.4		Id: 2/8

Raspberry Pi
Pin Header

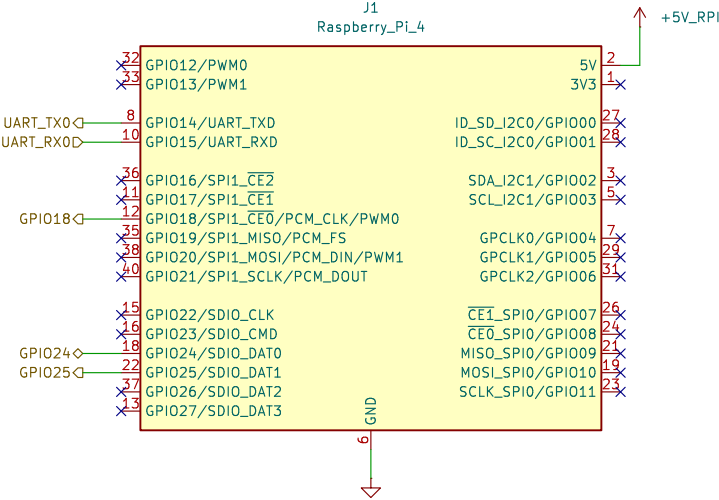

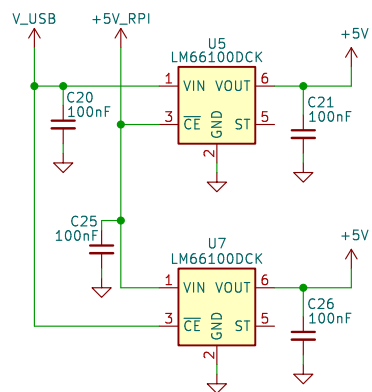

5V "or" circuit

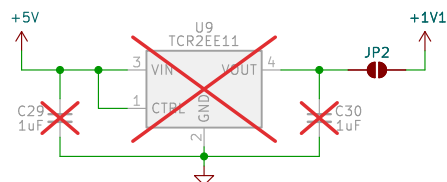


1.1V @ 200mA

Only pop as replacement
for RP2350 internal Vreg

Absolute max power consumption for a PI5 is 10W. Standard pi supply is 15.3W (which we would specify as a requirement).

From here we have 5.3W, ~1A for any USB-A peripherals and our hardware.

I think it's reasonable for us to assume we have around 300mA to use.

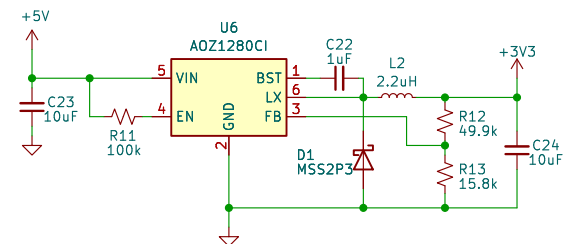

3.3V @ 1.2A

Sheet: /PMIC/
File: pmic.kicad_sch


Title:

Size: A4 Date:

KiCad E.D.A. 9.0.4

Rev:

Id: 4/8

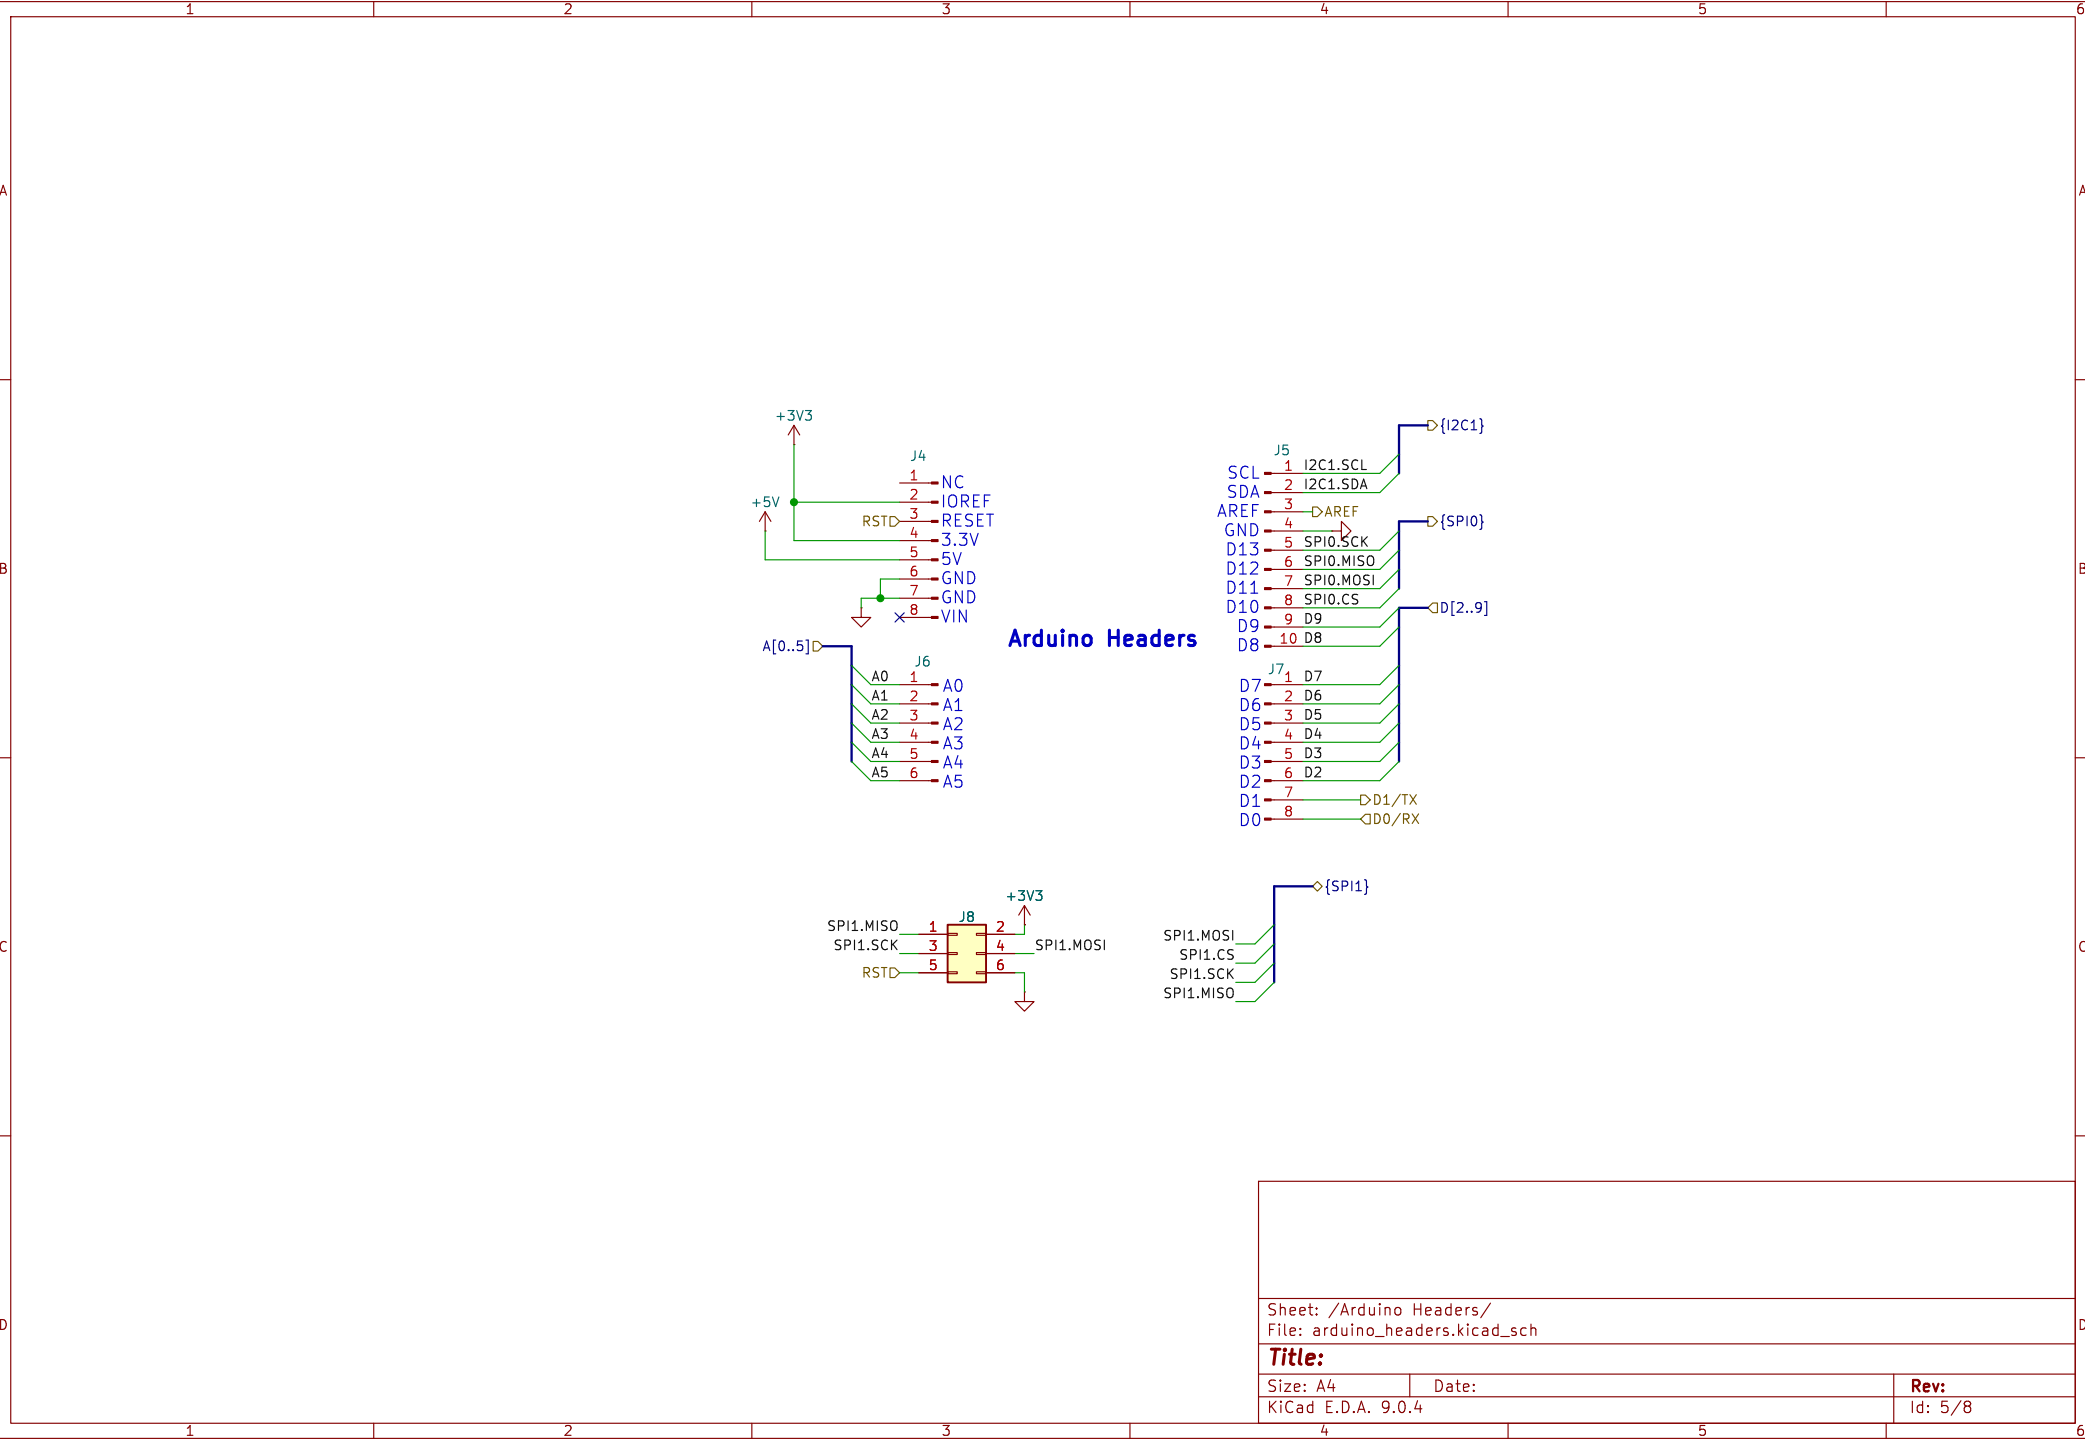

Sheet: /Arduino Headers/
File: arduino_headers.kicad_sch

Title:


Size: A4

Date:

Rev:

KiCad E.D.A. 9.0.4

Id: 5/8

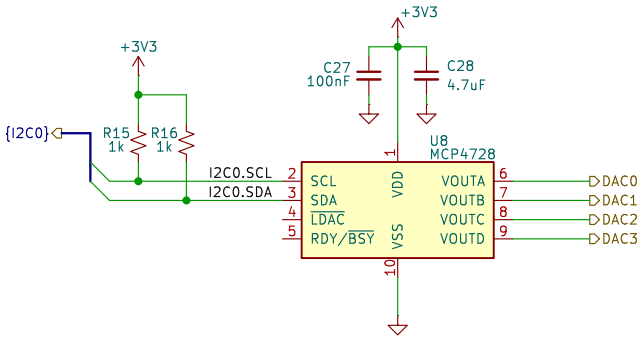

Sheet: /DAC/ File: dac.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.4	Id: 6/8	

