


Actividad 20 - TelNet

Wuke Zhang

1-ASIR

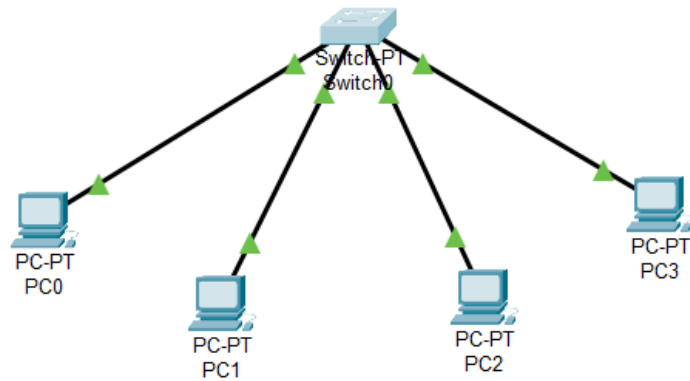

```
Switch0
Physical Config CLI Attributes
IOS Command Line Interface

Motherboard revision number: A0
Model number: WS-CSwitch-PT
System serial number: FHK0610Z0WC

Cisco Internetwork Operating System Software
IOS (tm) PT3000 Software (PT3000-I6Q4L2-M), Version 12.1(22)EA4, RELEASE SOFTWARE (fc1)
Copyright (c) 1986-2006 by cisco Systems, Inc.
Compiled Fri 12-May-06 17:19 by pt_team


Press RETURN to get started!

%LINK-5-CHANGED: Interface FastEthernet0/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to up
%LINK-5-CHANGED: Interface FastEthernet1/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet1/1, changed state to up
%LINK-5-CHANGED: Interface FastEthernet2/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet2/1, changed state to up
%LINK-5-CHANGED: Interface FastEthernet3/1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet3/1, changed state to up

Switch>enable
Switch#config t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#interface vlan 1
Switch(config-if)#ip address 192.168.1.1 255.255.255.0
Switch(config-if)#no shutdown


Switch(config-if)#
%LINK-5-CHANGED: Interface Vlan1, changed state to up
%LINEPROTO-5-UPDOWN: Line protocol on Interface Vlan1, changed state to up

Switch(config-if)#
```

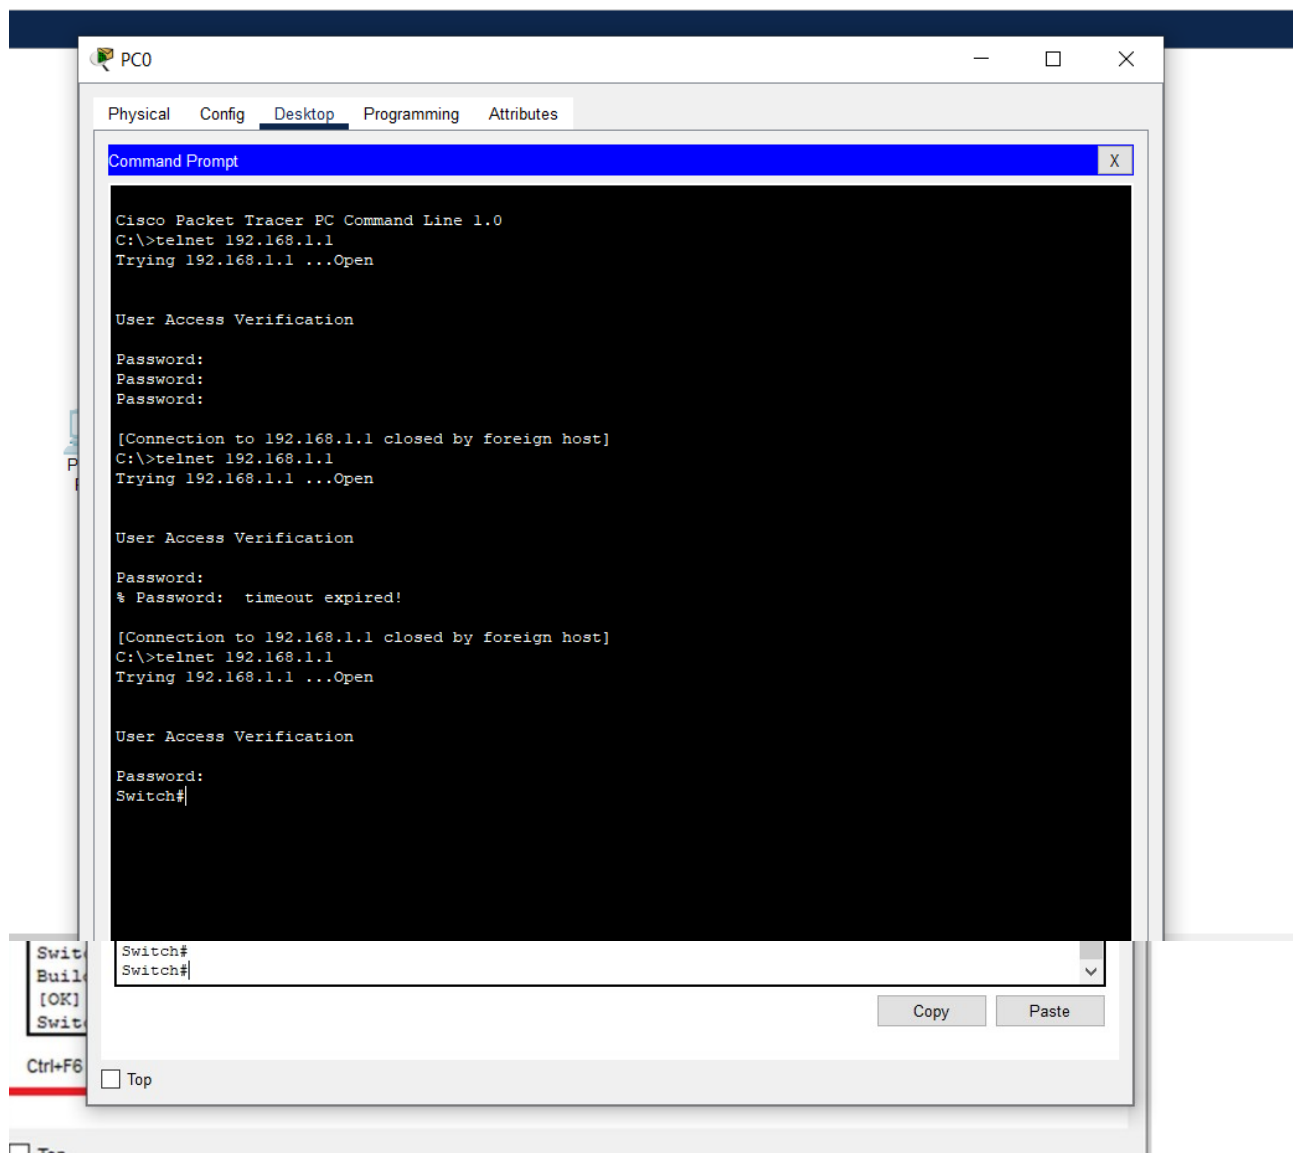

Aquí tuve errores con la contraseña porque era TernetPass ya que me equivoque y yo estaba poniendo TelnetPass porque pense que lo tenia bien, pero las capturas sirvieron de algo.

- **Configurar la VLAN2 desde la conexión realizada por TelNet (ver actividad 19).**

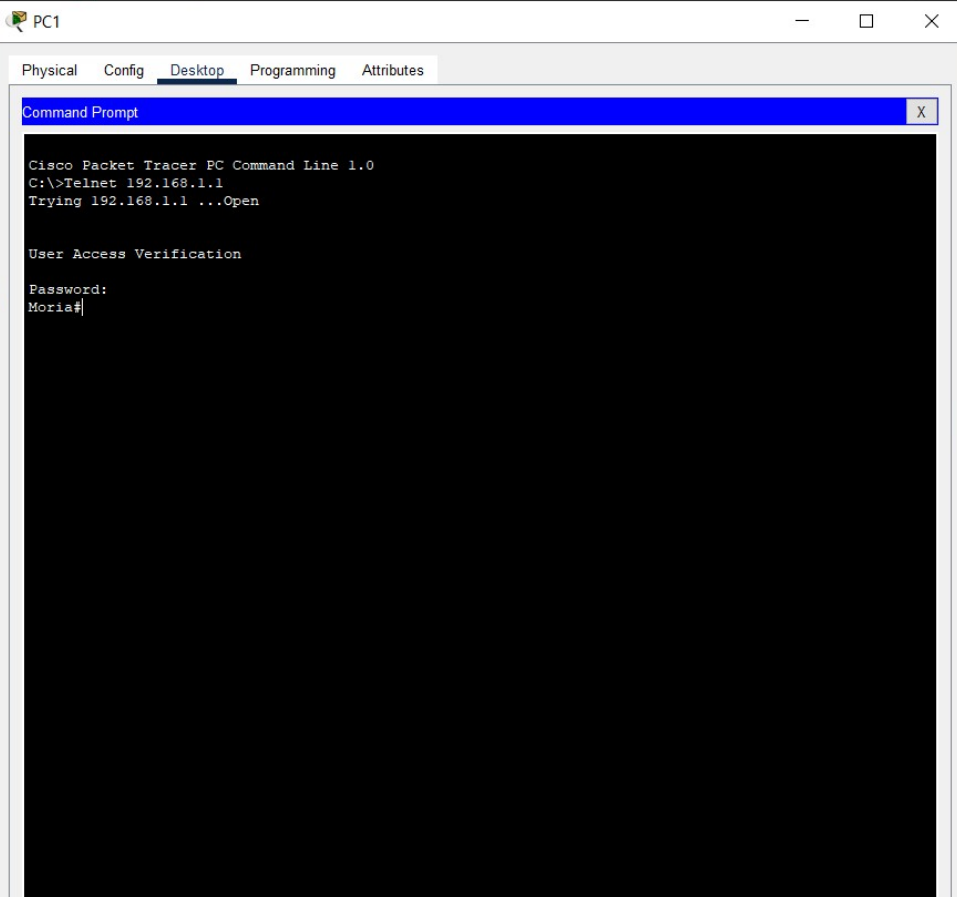

[OK]
Moria#
Moria#
Moria#

