


IGNITION OR STARTER SWITCH ASSY (1MZ-FE/3MZ-FE) REPLACEMENT

190SQ-03

The installation procedures are the removal procedures in reverse order.

1. **REMOVE DISCONNECT BATTERY NEGATIVE TERMINAL**
2. **REMOVE INSTRUMENT PANEL SUB-ASSY UPPER (See page 71-16)**

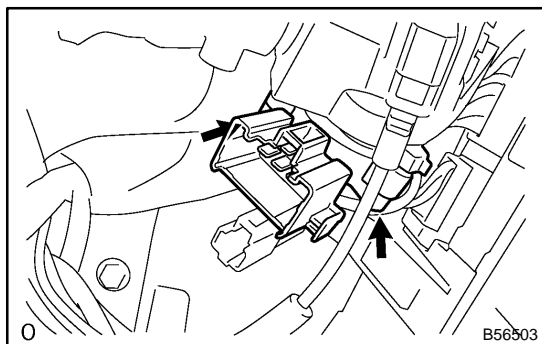

3. **REMOVE IGNITION OR STARTER SWITCH ASSY**
 - (a) Disconnect the ignition switch connector and unlock warning switch connector.
 - (b) Remove the clamp.
 - (c) Remove the 2 screws and ignition switch.