


IGNITION OR STARTER SWITCH ASSY (2AZ-FE)(From July, 2003)

190SP-03

REPLACEMENT

The installation procedures are the removal procedures in reverse order.

1. **DISCONNECT BATTERY NEGATIVE TERMINAL**
2. **REMOVE INSTRUMENT PANEL SUB-ASSY UPPER (See page 71-16)**

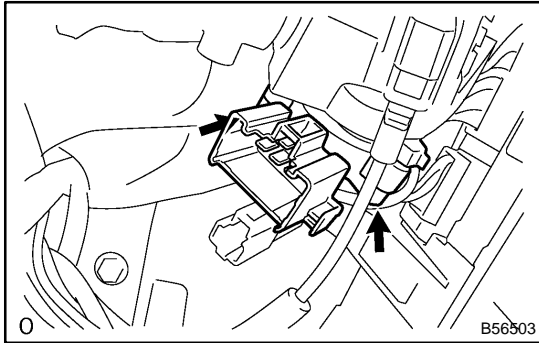

3. **REMOVE IGNITION OR STARTER SWITCH ASSY**
 - (a) Disconnect the ignition switch connector and unlock warning switch connector.
 - (b) Remove the clamp.
 - (c) Remove the 2 screws and ignition switch.