


CIGARETTE LIGHTER ASSY REPLACEMENT

67096-03

HINT:

COMPONENTS: See page 67-1

1. REMOVE FRONT ASH RECEPTACLE ASSY (See page 71-16)

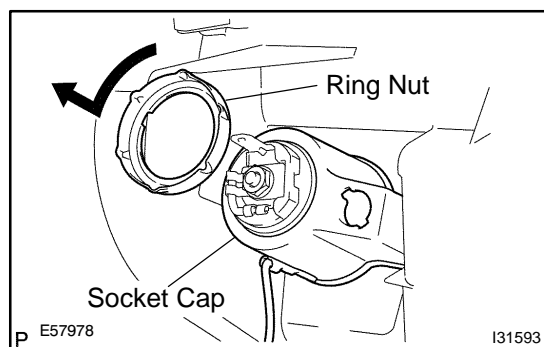

2. REMOVE CIGARETTE LIGHTER ASSY

- (a) Rotate the ring nut counterclockwise to remove it.
- (b) Remove the cigarette lighter assy from the instrument panel ash receptacle assy.

3. INSTALL CIGARETTE LIGHTER ASSY

- (a) Properly position the socket at the cutout of the instrument panel ash receptacle assy and insert them.
- (b) Install the socket cap.
- (c) Rotate the ring nut clockwise from the backside.