


CLUTCH PEDAL SUB-ASSY REPLACEMENT


4202H-01

1. REMOVE INSTRUMENT CLUSTER FINISH PANEL
(See page 71-10)
2. REMOVE COMBINATION METER ASSEMBLY (See page 71-21)
3. REMOVE INSTRUMENT PANEL SUB-ASSY UPPER
(See page 71-10)
4. REMOVE CLUTCH MASTER CYLINDER PUSH ROD CLEVIS W/HOLE PIN
 - (a) Remove the clip and hole pin.

LHD Steering Position Type:



RHD Steering Position Type:




D26273

5. REMOVE CLUTCH PEDAL ASSY

- (a) w/ Cruise control system:
Disconnect the clutch switch connector.
- (b) Remove the bolt, 2 nuts and clutch pedal assy.


6. REMOVE TURN OVER SPRING SEAT COMPRESSION SPRING

- (a) Using a small screwdriver, remove the E-ring.
- (b) Remove the compression spring.




N

D26274

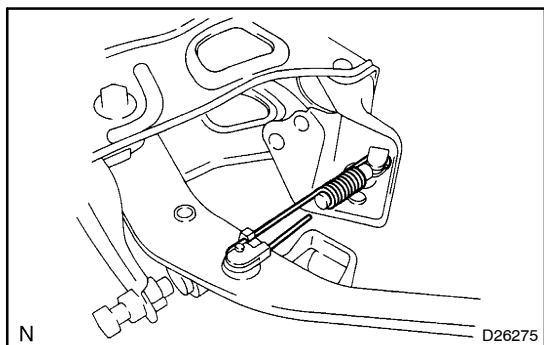


7. REMOVE CLUTCH PEDAL SUB-ASSY

- (a) Remove the clutch pedal spring.
- (b) Mount the clutch pedal assy in a soft jaw vise.

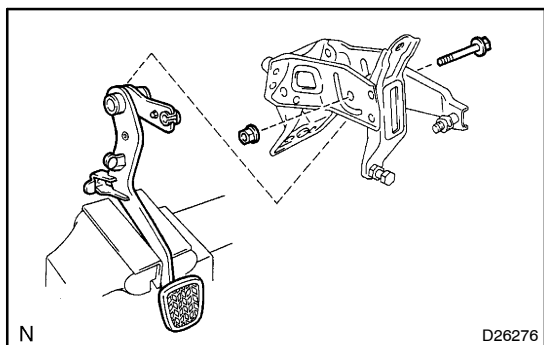


- (c) Remove the bolt, nut and clutch pedal sub-assy from clutch pedal support.

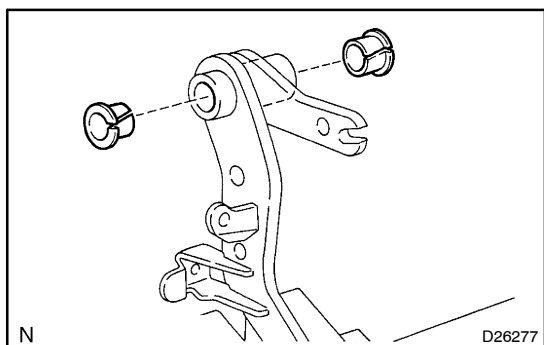

8. REMOVE CLUTCH PEDAL BUSH



- (a) Remove the 2 bushes from the clutch pedal sub-assy.

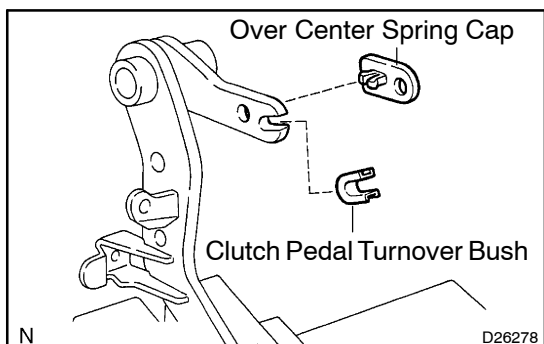


9. REMOVE CLUTCH PEDAL TURNOVER BUSH

10. REMOVE OVER CENTER SPRING CAP

11. REMOVE CLUTCH PEDAL PAD

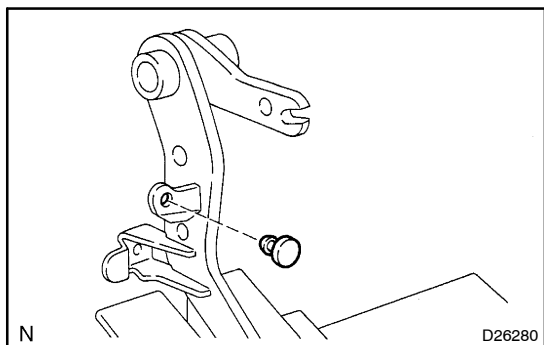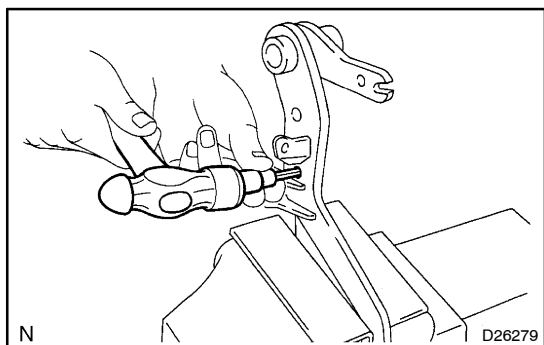**12. REMOVE CLUTCH PEDAL NO.1 CUSHION****13. REMOVE CLUTCH MASTER CYLINDER PUSH ROD CLEVIS BUSH**


- (a) Using a hexagon wrench (8 mm) and hammer, remove the clevis bush from the clutch pedal sub-assy.

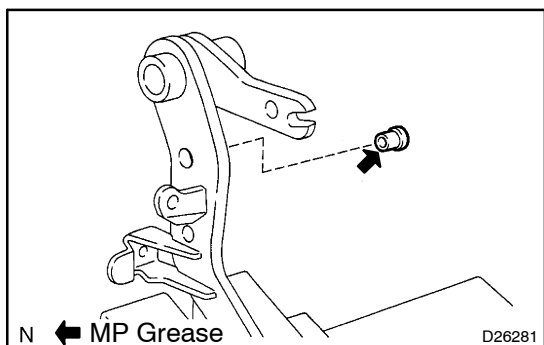**14. INSTALL CLUTCH MASTER CYLINDER PUSH ROD CLEVIS BUSH**


- (a) Apply MP grease to inside of a new bush.
 (b) Install the clevis bush to the clutch pedal sub-assy.

HINT:

Install the clevis bush from the right side of the vehicle.

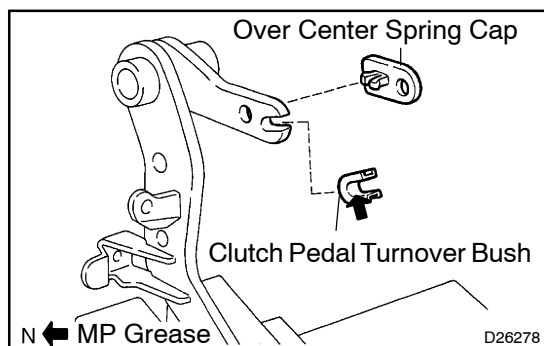
15. INSTALL CLUTCH PEDAL NO.1 CUSHION**16. INSTALL CLUTCH PEDAL PAD****17. INSTALL OVER CENTER SPRING CAP****18. INSTALL CLUTCH PEDAL TURNOVER BUSH**

- (a) Apply MP grease to inside of a new bush.
 (b) Install the bush to the clutch pedal sub-assy.

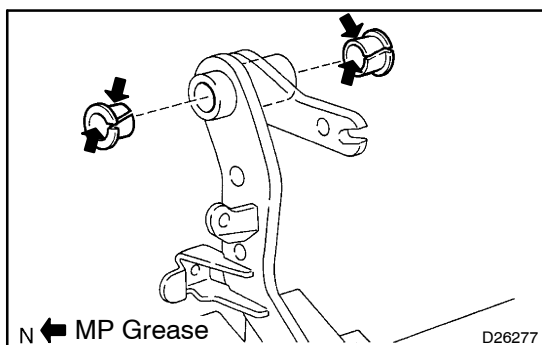

19. INSTALL CLUTCH PEDAL BUSH

- (a) Apply MP grease to both side of 2 new bushes.
- (b) Install the 2 bushes to the clutch pedal sub-assy.

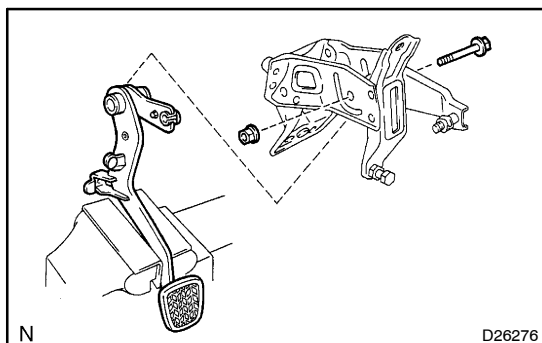


20. INSTALL CLUTCH PEDAL SUB-ASSY

- (a) Install the clutch pedal sub-assy to the clutch pedal support with the bolt and nut.


Torque: 36.8 N·m (375 kgf·cm, 27 ft·lbf)

HINT:

Install the bolt from the right side of the vehicle.

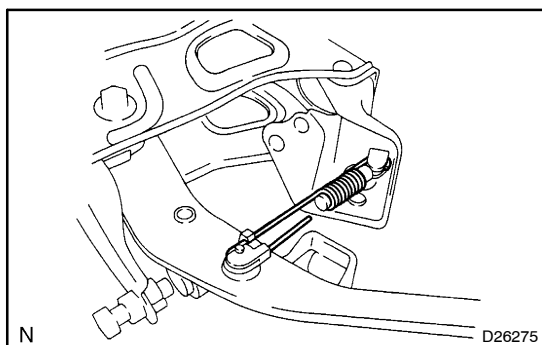

- (b) Install the clutch pedal spring.

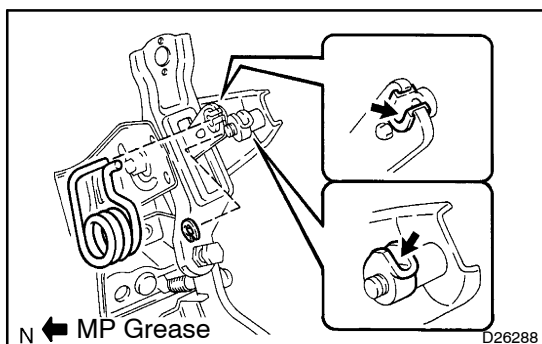

21. INSTALL TURN OVER SPRING SEAT COMPRESSION SPRING

- (a) Apply MP grease to the contact surface of the bush and spring.
- (b) Install the compression spring.
- (c) Using needle nose pliers, install the E-ring.

22. INSTALL CLUTCH PEDAL ASSY


- (a) Install the clutch pedal assy with the bolt and 2 nuts.

Torque:

Bolt: 19.1 N·m (195 kgf·cm, 14 ft·lbf)

Nut: 11.8 N·m (120 kgf·cm, 9 ft·lbf)

- (b) w/ Cruise control system:
Connect the clutch switch connector.

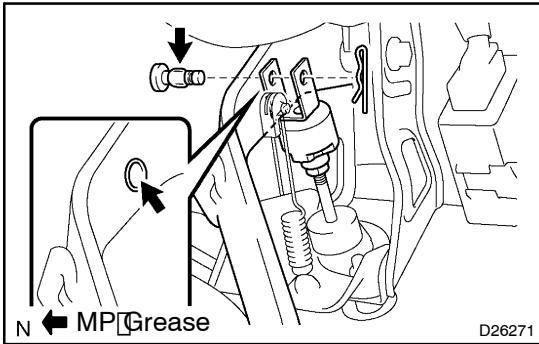

23. INSTALL CLUTCH MASTER CYLINDER PUSH ROD CLEVIS W/HOLE PIN

- Apply MP grease to the contact surface of the hole pin and push.
- Connect the clevis to the clutch pedal assy with the hole pin.

HINT:

Install the hole pin from the left side of the vehicle.

- Install the clip to the hole pin.

24. INSTALL INSTRUMENT PANEL SUB-ASSY UPPER

(See page 71-10)

25. INSTALL COMBINATION METER ASSEMBLY (See page 71-21)

26. INSTALL INSTRUMENT CLUSTER FINISH PANEL

(See page 71-10)

27. INSPECT AND ADJUST CLUTCH PEDAL SUB-ASSY

(See page 42-7)