


STEREO COMPONENT AMPLIFIER ASSY REPLACEMENT

67092-03

HINT:

COMPONENTS: See page 67-1

1. REMOVE FRONT DOOR SCUFF PLATE RH (See page 71-16)
2. REMOVE COWL SIDE TRIM SUB-ASSY RH (See page 71-16)
3. REMOVE INSTRUMENT PANEL UNDER COVER SUB-ASSY NO.1 (See page 71-16)
4. REMOVE GLOVE COMPARTMENT DOOR PAD (See page 71-16)
5. REMOVE INSTRUMENT PANEL SUB-ASSY LOWER (See page 71-16)

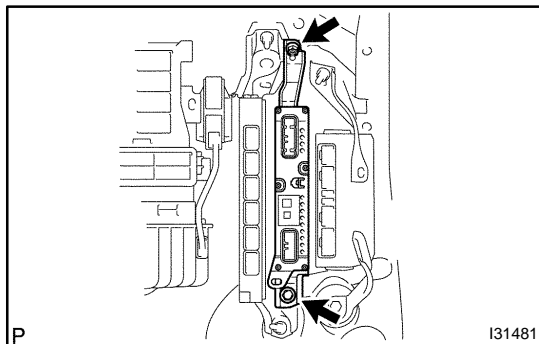

6. REMOVE STEREO COMPONENT AMPLIFIER ASSY
 - (a) Disconnect the connectors.
 - (b) Remove the 2 nuts and stereo component amplifier assy.