
# NAVIGATION ANTENNA ASSY REPLACEMENT

### HINT:

COMPONENTS: See page 67-1

- 1. REMOVE LUGGAGE COMPARTMENT FLOOR MAT
- 2. REMOVE SPARE WHEEL COVER ASSY
- 3. REMOVE LUGGAGE COMPARTMENT TRIM HOOK NO.1 (See page 76-8)
- 4. REMOVE REAR FLOOR FINISH PLATE (See page 76-8)
- REMOVE LUGGAGE COMPARTMENT TRIM COVER INNER LH (See page 76-8) 5.
- 6. REMOVE REAR SEAT CUSHION ASSY (See page 72–32)
- REMOVE REAR SEAT BACK ASSY RH (See page 72-32) 7.
- 8. REMOVE REAR SEAT BACK ASSY LH (See page 72–32)
- REMOVE REAR SIDE SEAT BACK ASSY RH (TMC MADE) (See page 72-32) 9.
- 10. REMOVE REAR SIDE SEAT BACK ASSY LH (TMC MADE) (See page 72-32)
- REMOVE ROOF SIDE GARNISH INNER RH (W/O CURTAIN SHIELD AIR BAG) (See page 76-22)
- 12. REMOVE ROOF SIDE GARNISH INNER LH (W/O CURTAIN SHIELD AIR BAG) (See page 76-22)
- 13. REMOVE ROOF SIDE GARNISH INNER RH (W/ CURTAIN SHIELD AIR BAG) (See page 76-22)
- 14. REMOVE ROOF SIDE GARNISH INNER LH (W/ CURTAIN SHIELD AIR BAG) (See page 76-22)
- 15. REMOVE REAR SEAT SHOULDER BELT COVER RH (See page 61-13 or 61-16)
- 16. REMOVE PACKAGE TRAY TRIM PANEL ASSY (TMC MADE) (See page 67–10)
- 17. REMOVE REAR SEAT 3 POINT TYPE BELT ASSY OUTER (TMC MADE) (See page 61-13)
- 18. REMOVE REAR SEAT INNER W/CENTER BELT ASSY RH (TMC MADE) (See page 61–13)
- 19. REMOVE REAR SEAT INNER W/CENTER BELT ASSY LH (TMC MADE) (See page 61-13)
- 20. REMOVE ROOM PARTITION BOARD LH (TMC MADE) (See page 67-10)
- 21. REMOVE ROOM PARTITION BOARD RH (TMC MADE) (See page 67-10)




#### 22. **REMOVE NAVIGATION ANTENNA ASSY**

- (a) Disconnect the connector.
- Tie the string at the tip of the cable of the navigation an-(b) tenna assy.

- (c) Remove the screw.
- (d) Remove the clamp and navigation antenna assy.

## **NOTICE:**

As the string is used at the time of installation, remain it putting through the luggage room and the room side.

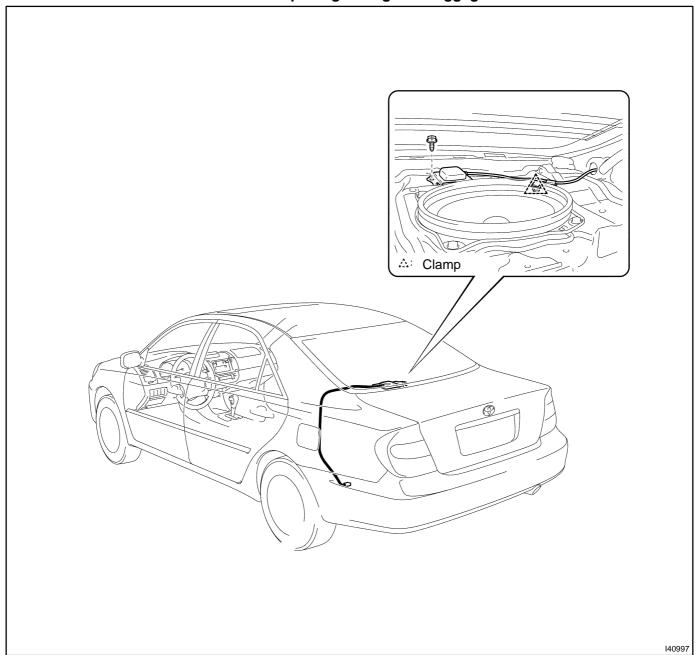

### 23. INSTALL NAVIGATION ANTENNA ASSY

- (a) Detach the string put through the luggage room and the room side from the connector and attach it with a new navigation antenna assy.
- (b) Using this string put the navigation antenna assy through the luggage room and the room side.

# NOTICE:

To prevent the connector from being damaged, wrap protective tape around the tip of connector of the navigation antenna assy.

- (c) Install the navigation antenna assy with screw and clamp.
- (d) Connect the connector.

- 24. INSTALL REAR SEAT INNER W/CENTER BELT ASSY RH (TMC MADE) (See page 61–13)
- 25. INSTALL REAR SEAT 3 POINT TYPE BELT ASSY OUTER (TMC MADE) (See page 61-13)
- 26. INSTALL REAR SEAT INNER W/CENTER BELT ASSY LH (TMC MADE) (See page 61-13)
- 27. INSTALL REAR SIDE SEAT BACK ASSY LH (TMC MADE) (See page 72–32)
- 28. INSTALL REAR SIDE SEAT BACK ASSY RH (TMC MADE) (See page 72-32)
- 29. INSTALL REAR SEAT BACK ASSY RH (See page 72–32)
- 30. INSTALL REAR SEAT BACK ASSY LH (See page 72–32)