




LUGGAGE COMPARTMENT OPENING TROUGH (ASSY) REPLACEMENT

1. REMOVE LUGGAGE COMPARTMENT OPENING TROUGH

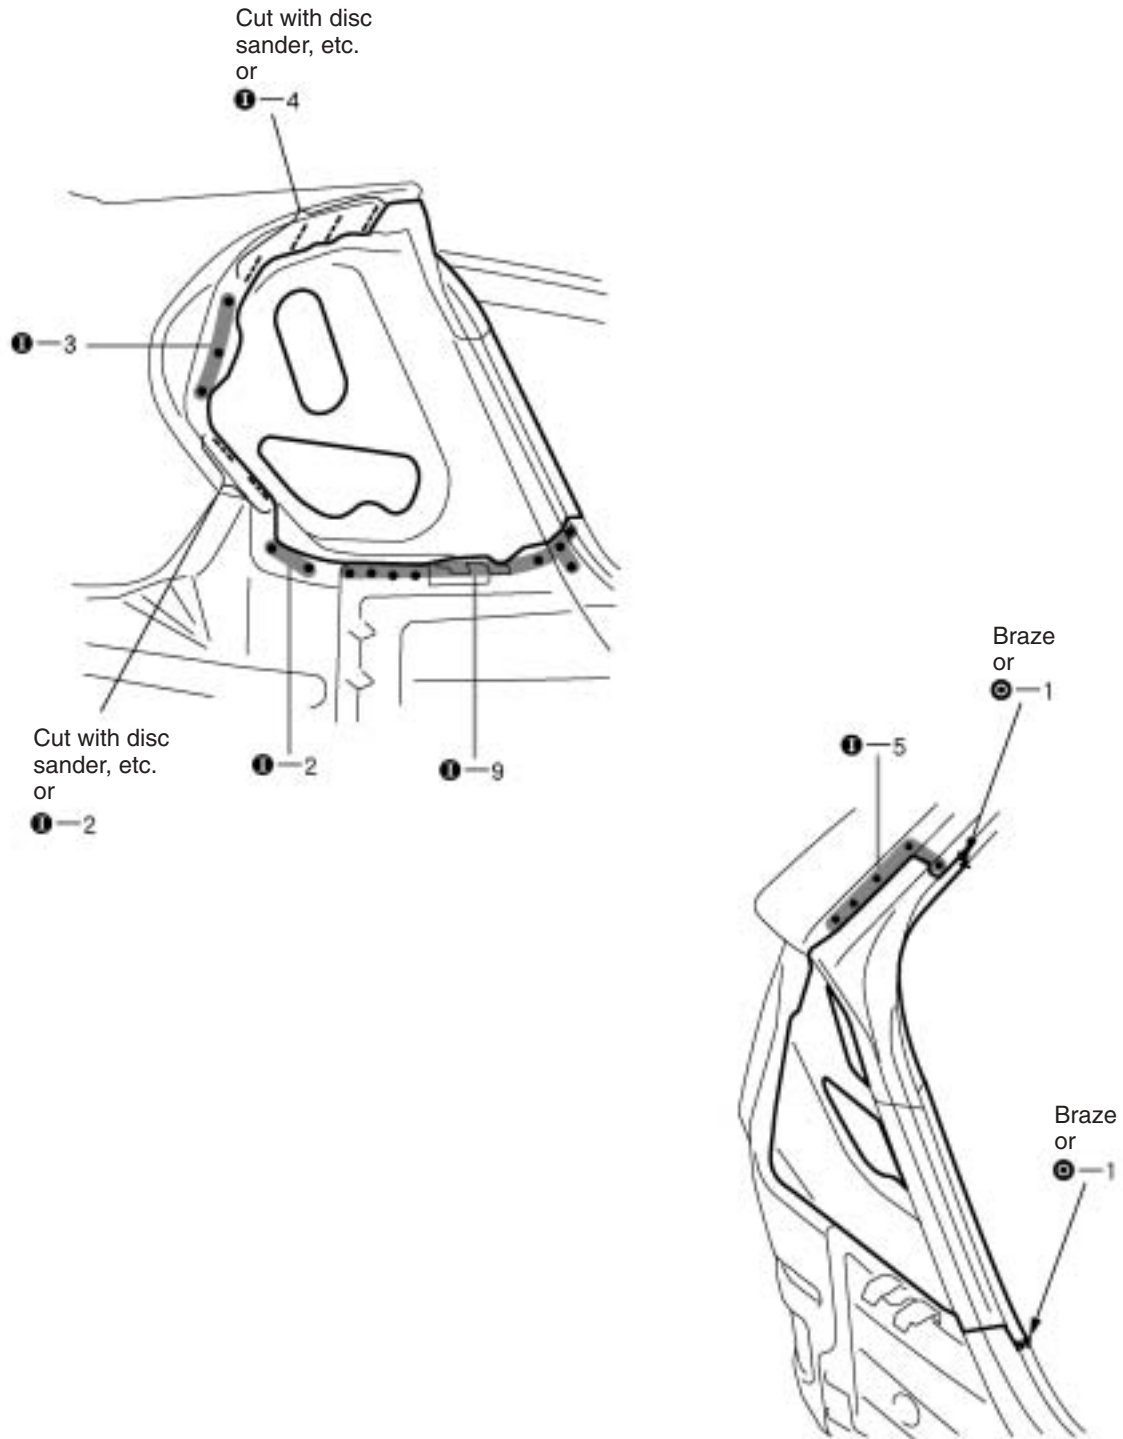

2. INSTALL LUGGAGE COMPARTMENT OPENING TROUGH**HINT:**

Inspect the fitting of the luggage compartment door and rear combination light, etc, before welding, since this affects the appearance of the finish.

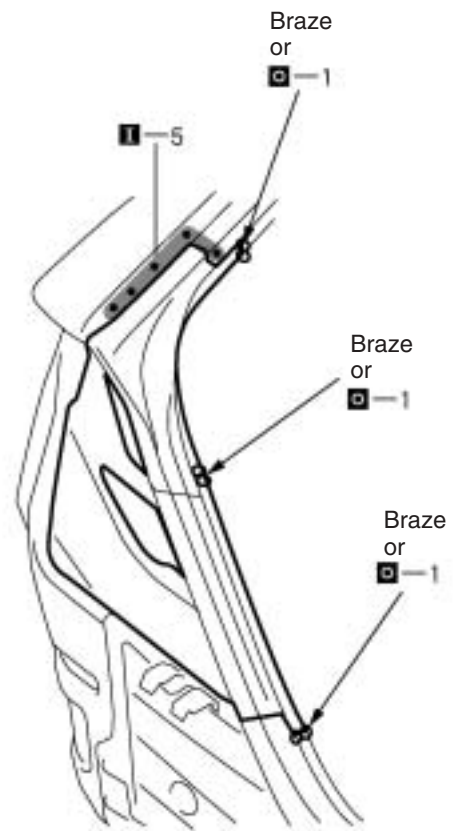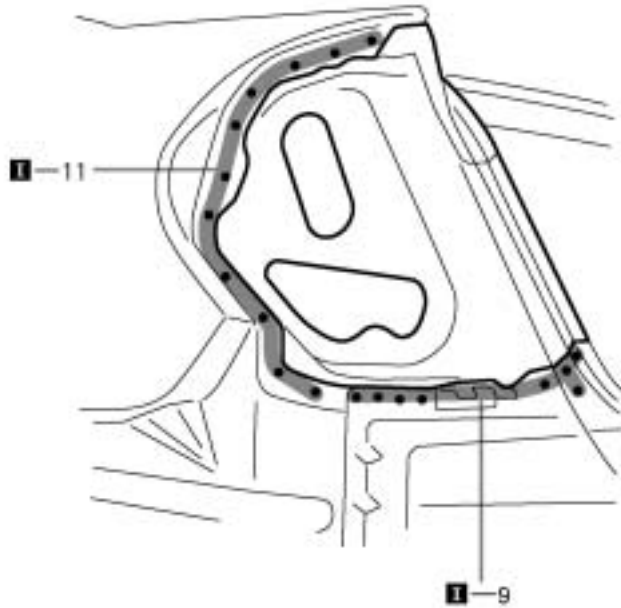

3. MEASURING THE OPENING PORTION DIMENSIONS ([See page BP-100](#))
4. APPLYING SEALER TO THE REAR LUGGAGE COMPARTMENT ([See page PC-1](#))
5. APPLYING ANTI-RUST AGENT
 - (a) After applying the top coat layer, apply the anti-rust agent to the inside of the necked section structural weld spots.