


COMBINATION METER ASSY OVERHAUL

7105J-03

HINT:


- COMPONENTS: See page 71-9.
- Installation is in the reverse order of removal.

1. REMOVE INSTRUMENT CLUSTER FINISH PANEL (SEE PAGE 71-16)

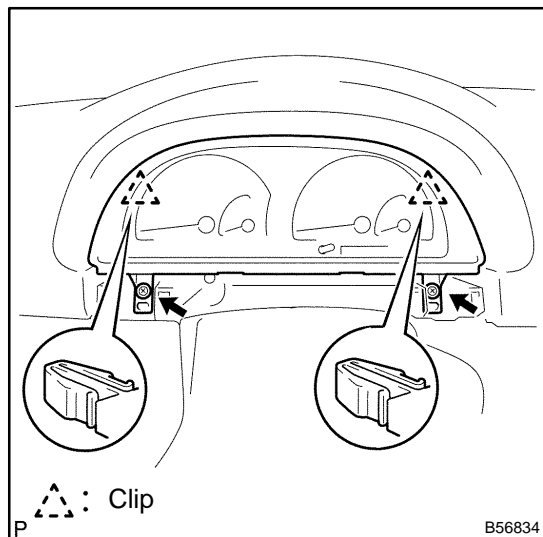

2. REMOVE COMBINATION METER ASSY

- Remove the 2 screws and disengage the 2 clips.
- Disconnect the connectors and remove the combination meter assy.

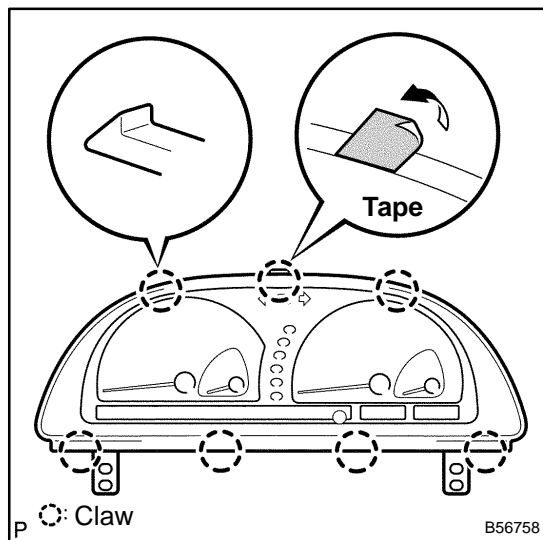

3. REMOVE COMBINATION METER GLASS

- Reverse the combination meter and remove the 2 screws.
- Remove the tape.
- Disengage the 7 claws and remove the combination meter glass.