

## Correction to Roles of Sulfuric Acid in Elemental Mercury Removal by Activated Carbon and Sulfur-impregnated Activated Carbon

Eric A. Morris, Donald W. Kirk, and Charles Q. Jia\*

Department of Chemical Engineering & Applied Chemistry, University of Toronto, 200 College St., Toronto, Ontario, Canada M5S 3E5 Kazuki Morita

Institute of Industrial Science, University of Tokyo, 4-6-1, Komaba, Meguro-ku, Tokyo, 153-8505, Japan

Environ. Sci. Technol. 2012, 46, 7905-7912; DOI: 10.1021/es301209t

n page 7910, a duplicate of Figure 5 was erroneously used in place of Figure 9. The correct version of Figure 9 is provided below.

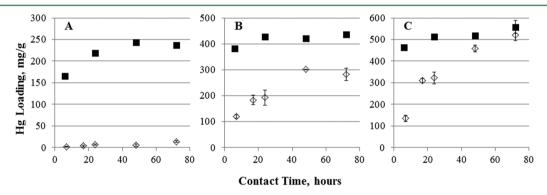


Figure 9. Hg loading on BPL ( $\diamondsuit$ ) and SO<sub>2</sub>-BPL ( $\blacksquare$ ) with no H<sub>2</sub>SO<sub>4</sub> treatment (A), treatment with 5% H<sub>2</sub>SO<sub>4</sub> (B), and treatment with 20% H<sub>2</sub>SO<sub>4</sub> (C) at 200 °C. Error bars for SO<sub>2</sub>-BPL, SO<sub>2</sub>-BPL+5%, and SO<sub>2</sub>-BPL+20% represent analytical standard deviation of the ICP-AES total Hg measurement, whereas error bars for BPL, BPL+5%, and BPL+20% represent standard deviation of duplicate experiments.

## **■** AUTHOR INFORMATION

## **Corresponding Author**

\*Phone: +1 416 946 3097; fax: +1 416 978 8605; e-mail: cq.jia@utoronto.ca.

© 2012 American Chemical Society