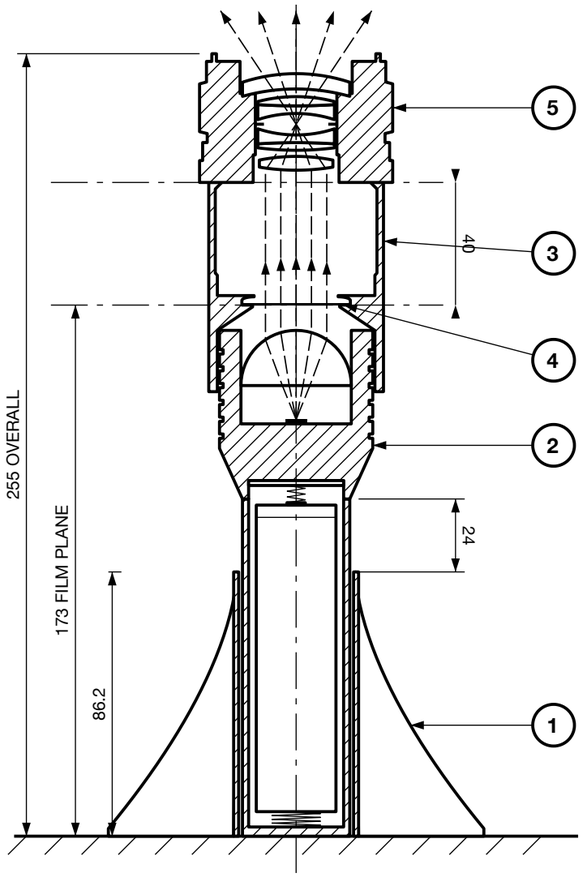
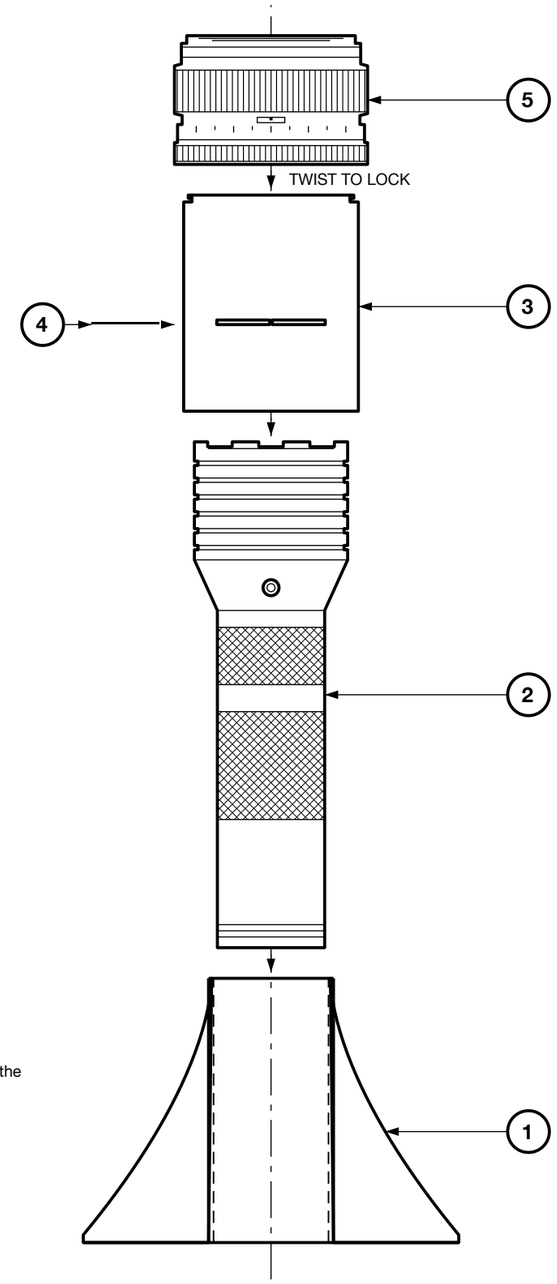



## GENERAL ARRANGEMENT

SECTION ON THE AXIS, ACROSS THE FILM scale 1:2

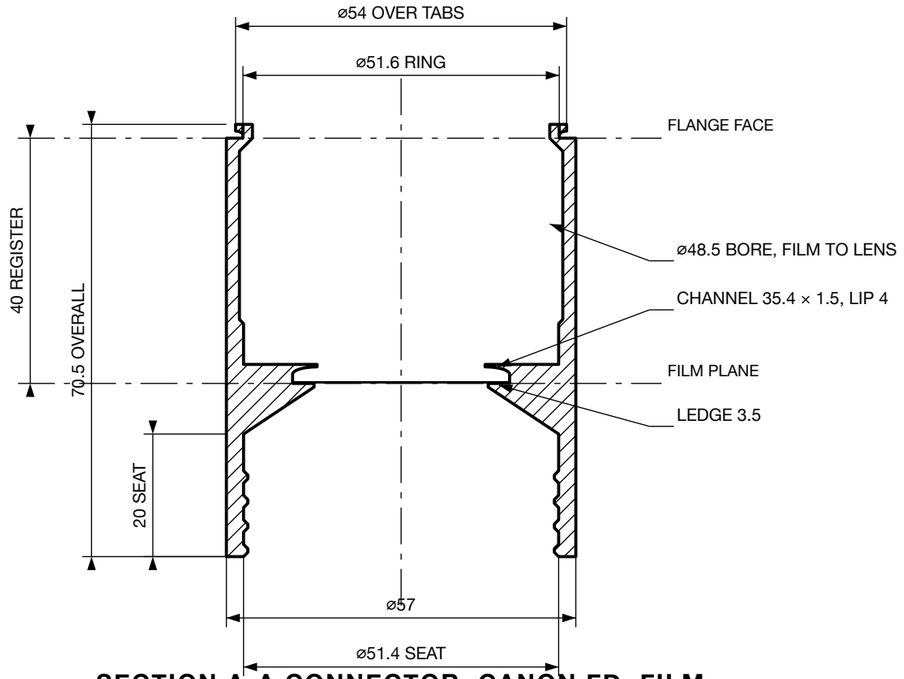
## NOTES

1. Balloon numbers refer to the PARTS LIST below. Arrangement and exploded views 1:2; Section A-A, View B and the film 1:1. Stand plan is on GA-001. All figures read from src/*.scad at draw time.
2. Stand and torch both stand on the table: the torch tail is on the table inside the stand bore, 24 mm of barrel shows above the column, then the head widens. The column centres the torch; it does not carry it.
3. Connector drops over the torch head; the 20 mm seat takes the head and the head's shoulder carries the connector's weight.
4. Film threads straight through: in at one mouth, out the other, in a 35.4 × 1.5 channel. It rides on 3.5 mm ledges under the sprocket margins and 4 mm lips stop it lifting, so the picture never touches plastic. Snap out the 0.8 mm post across each mouth before threading. Film plane is 173 above the table.
5. Lens drops onto the three tabs and the breech ring twists to lock. Register 40 film to flange face (Canon FD nominal 42.0), deliberately short - see GA-001 note 2.
6. Torch and lens are bought parts drawn indicatively from the maker's listing and a generic 50 mm outline; grooves, knurling, rings and ribs are typical, not measured. Film is nominal (ISO 1007).



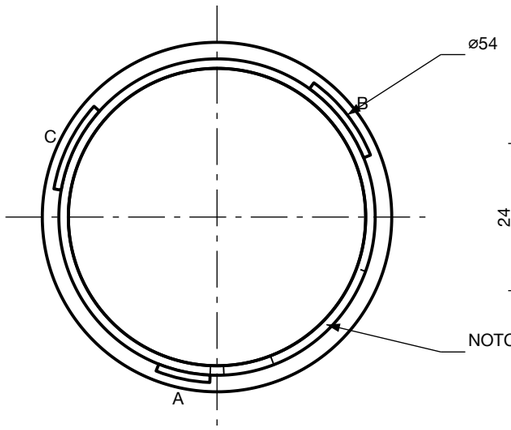

## EXPLODED

ORDER OF ASSEMBLY scale 1:2



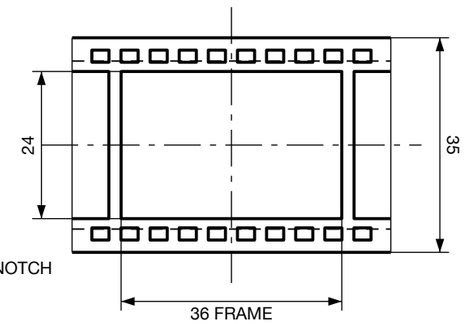

## SECTION A-A CONNECTOR, CANON FD, FILM

across the film · scale 1:1




## VIEW B MOUNT FACE

3 TABS, NOTCHES 1.1 DEEP DASHED




## FILM, 35 mm STRIP

item 4 · lips dashed, 1.7 clear of the picture · nominal · scale 1:1

| ITEM | PART | SOURCE | QTY | REMARKS |
|---|---|---|---|---|
| 1 | STAND | src/base.scad | 1 | printed upright, brim. ø37.5 bore, 86.2 rise, 4 fins 122.5 across |
| 2 | TORCH, GLARYLIGHT P70-DK | bought | 1 | ø50 head, ø35 barrel, 165 long (maker's listing; head length 55 estimated) |
| 3 | CONNECTOR, CANON FD, FILM | src/connector_fd_film.scad | 1 | upright, no support. register 40 to the film, channel 35.4 × 1.5 |
| 3A | CONNECTOR, OLYMPUS OM | src/connector_om.scad | alt | OM socket head on the SLIDE body; no film version. register 45 |
| 4 | FILM, 35 mm STRIP | bought | - | 35 wide, threads straight through, in one mouth and out the other |
| 5 | LENS, CANON FD 50 mm | bought | 1 | indicative outline, not measured. any FD / FL lens; its focus ring focuses |
| 6 | CAP, CANON FD | src/cap_fd.scad | 1 | half egg; twists onto the FD throat in place of the lens, for the shelf |

# GB-1C PROJECTOR

GA-002

## GENERAL ARRANGEMENT

Godin Bremond 1, Canon FD · stand → torch → connector + film → lens

| | | | |
|---|---|---|---|
| SCALE | 1:2 / 1:1 ON A3 | DRAWN | O. BALLINGER |
| UNITS | MILLIMETRES | DATE | 2026-10-01 |
| MATERIAL | PLA, FDM 0.2 mm LAYER | SOURCE | src/*.scad |
| PRINTER | ULTIMAKER 3 | REV | A |

