

5G/6G COMMUNICATION SYSTEM

NAME: NANDITHA S

REG NO:192412467

EXPERIMENT 2:

AIM: To implement TDMA (Time Division Multiple Access) slot allocation in GSM using MATLAB and analyze system performance in terms of time slot duration, frame utilization, and number of allocated slots

OBJECTIVE 1:

To calculate the Time Slot Duration in a GSM TDMA frame by dividing the total frame time into equal time slots. This helps in understanding the time structure of GSM communication.

CODE:

```
clc; clear; close all;

FrameTime = 4.615; Slots = 8;

SlotDuration = FrameTime/Slots;

t = 0:SlotDuration:FrameTime;

figure

subplot(2,1,1)

stem(t,ones(size(t)),'filled')

title('TDMA Time Slot Structure')

xlabel('Time (ms)')

ylabel('Slot Level')

grid on

subplot(2,1,2)


plot(t,ones(size(t)),'-o','LineWidth',1.5)

title('Continuous View of Slot Allocation')

xlabel('Time (ms)')

ylabel('Slot Presence')
```

grid on

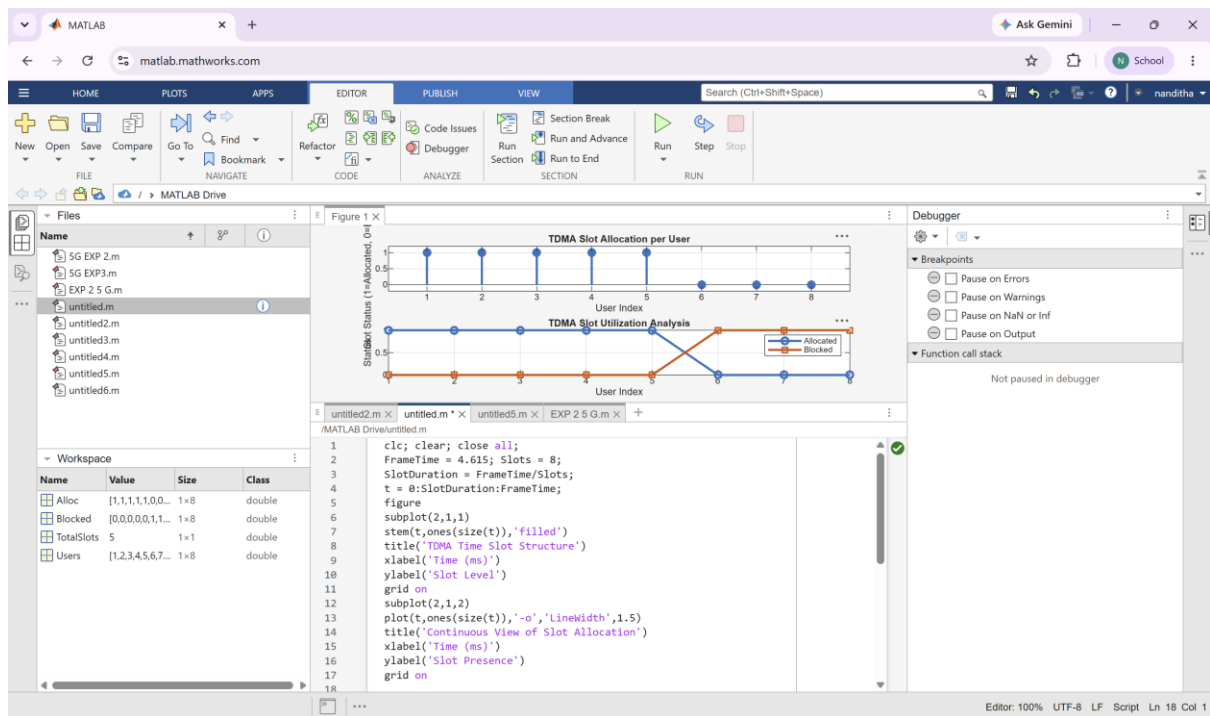

OBJECTIVE 2:

To determine the Frame Utilization (%) based on the number of allocated time slots compared to total available slots. This evaluates the efficiency of TDMA resource usage.

CODE:

```
clc; clear; close all;
```

```
TotalSlots = 8;
```

```
AllocatedSlots = 6;
```

```
FreeSlots = TotalSlots - AllocatedSlots;
```

```
Utilization = (AllocatedSlots/TotalSlots)*100;
```

```
disp('Frame Utilization (%)')
```

```
disp(Utilization)
```

```
figure
```

```
% Graph 1: Simple Line Plot (SAFE - no bar function)
```

```
subplot(2,1,1)
```

```
plot([1 2],[AllocatedSlots FreeSlots],'-o','LineWidth',2)
```

```
title('GSM Frame Utilization (Allocated vs Free)')
```

```

xlabel('Slot Type Index (1=Allocated, 2=Free)')
ylabel('Number of Slots')
grid on
% Graph 2: Pie Chart (SAFE)
subplot(2,1,2)
pie([AllocatedSlots FreeSlots])
title('Slot Distribution in GSM Frame')
legend('Allocated','Free')

```

OBJECTIVE 3:

To compute the Number of Allocated Time Slots for multiple users in the GSM system.

This ensures proper scheduling and interference-free communication

CODE:

```

clc; clear; close all;
Users = 1:8; % Total users
TotalSlots = 5; % Available slots
Alloc = zeros(1,8); % Initialize allocation
Alloc(1:TotalSlots) = 1; % Assign slots to first users
Blocked = 1 - Alloc; % Remaining users blocked
disp('User Wise Slot Allocation')
disp(table(Users',Alloc','VariableNames',{'User','Status(1=Allocated,0=Blocked)'}))
figure
% Graph 1: Allocation per user
subplot(2,1,1)
stem(Users,Alloc,'filled','LineWidth',2)
title('TDMA Slot Allocation per User')
xlabel('User Index')

```

```
ylabel('Slot Status (1=Allocated, 0=Blocked)')
```

```
ylim([-0.2 1.2])
```

```
grid on
```

```
% Graph 2: System view (safe alternative to bar)
```

```
subplot(2,1,2)
```

```
plot(Users,Alloc,'-o','LineWidth',2)
```

```
hold on
```

```
plot(Users,Blocked,'-s','LineWidth',2)
```


```
title('TDMA Slot Utilization Analysis')
```

```
xlabel('User Index')
```

```
ylabel('Status')
```

```
legend('Allocated','Blocked')
```

```
grid on
```

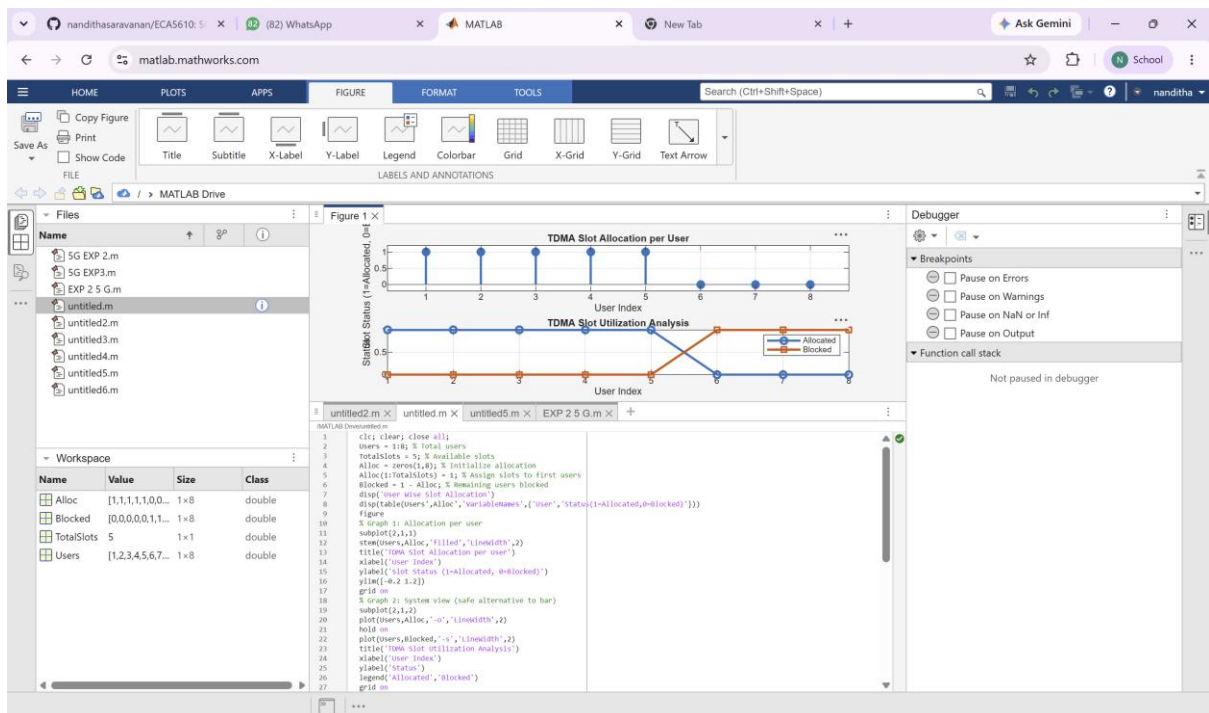

RESULTS:

1. The time slot duration in the GSM TDMA frame was successfully calculated, confirming

equal division of the frame into fixed time intervals.

2. The frame utilization was effectively analyzed, showing the proportion of allocated and

free slots in the TDMA system.

3. The slot allocation per user was successfully implemented, demonstrating that limited

slots are assigned to users while excess users are blocked due to resource constraints.