




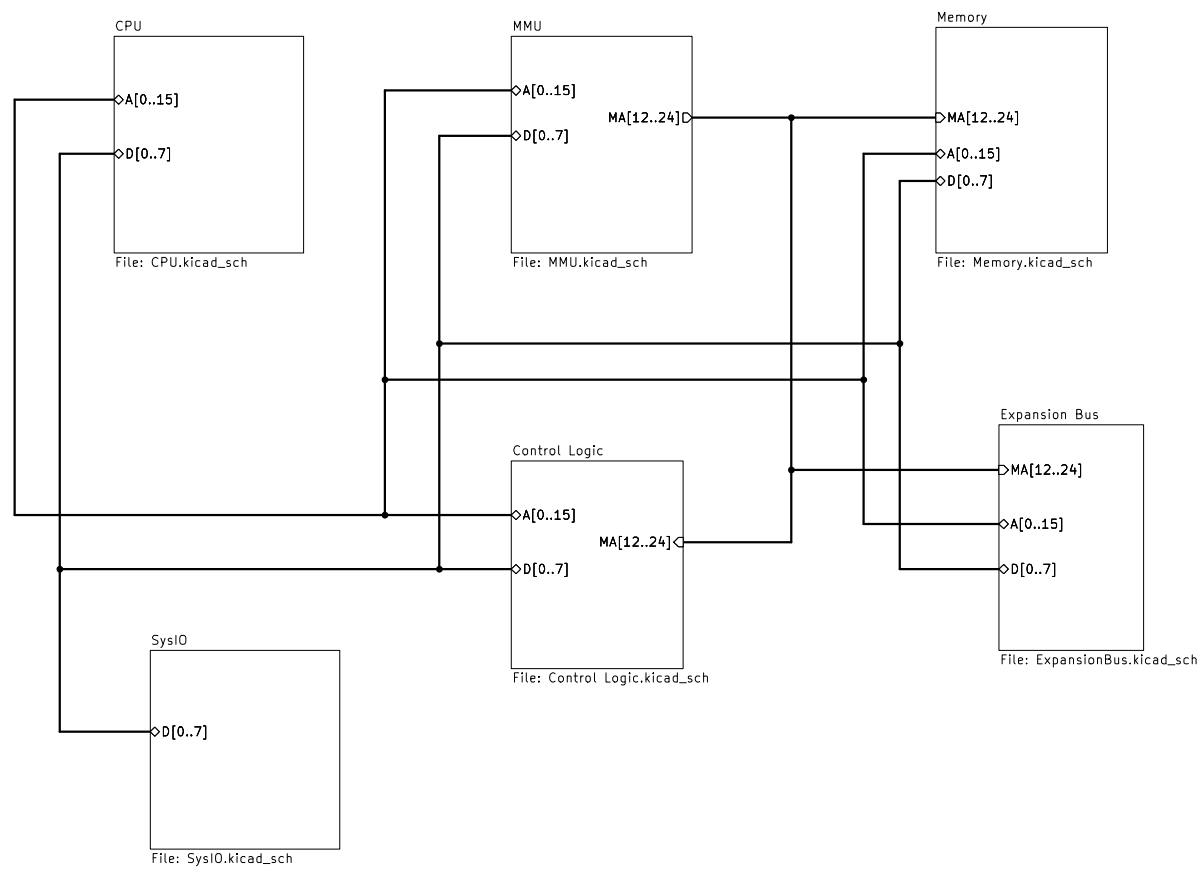
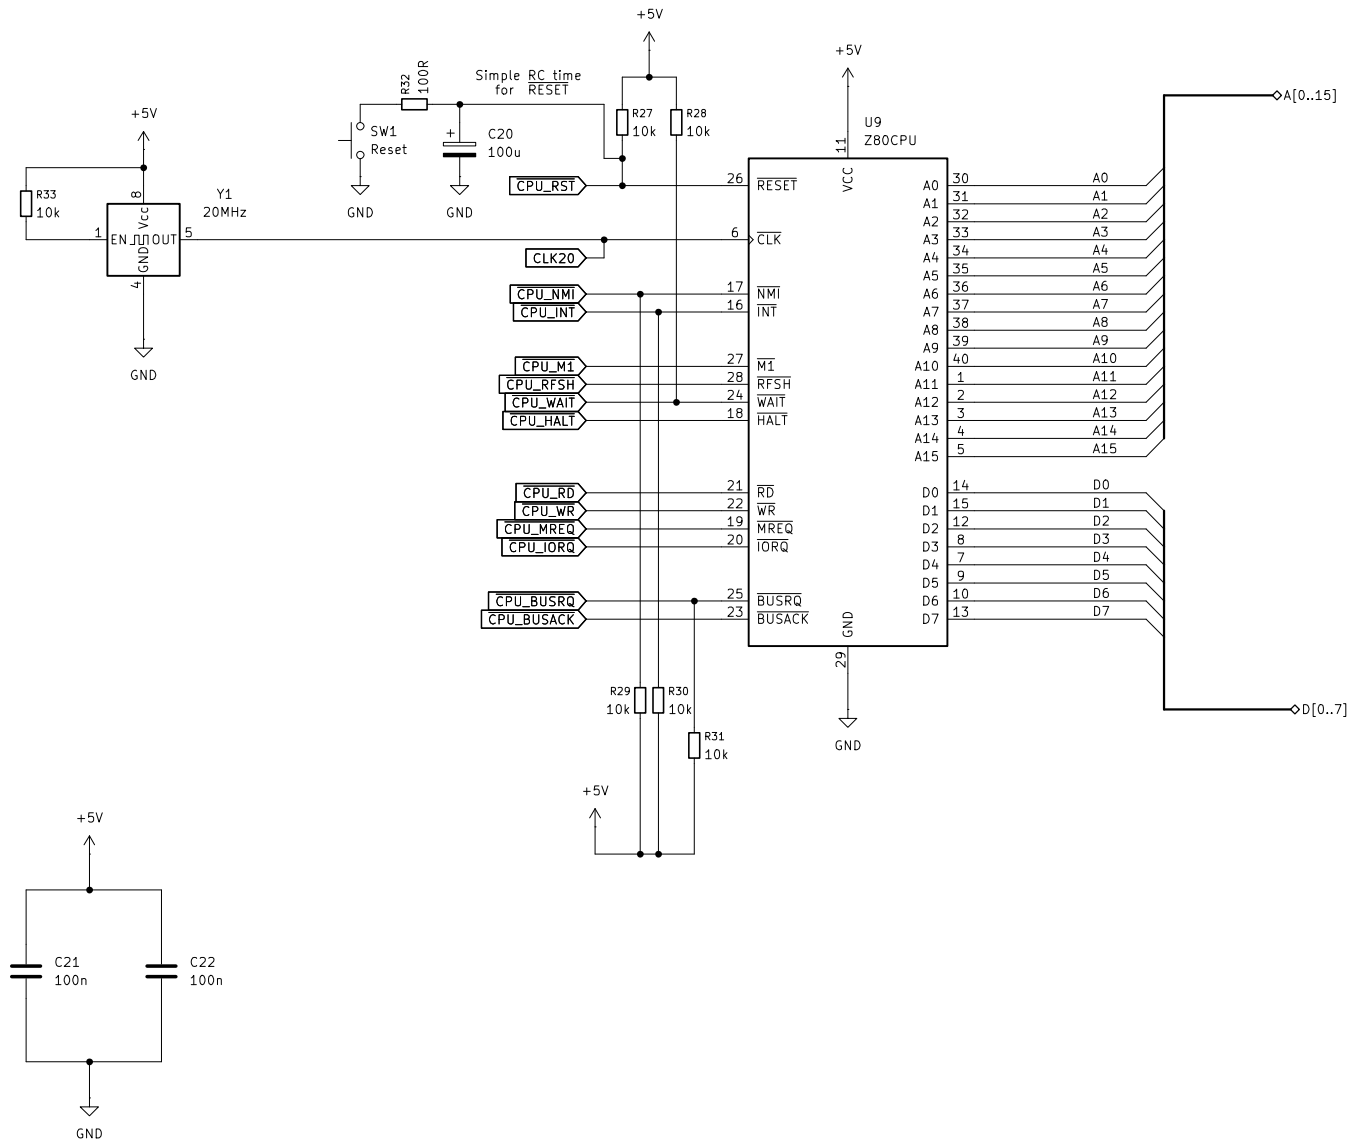

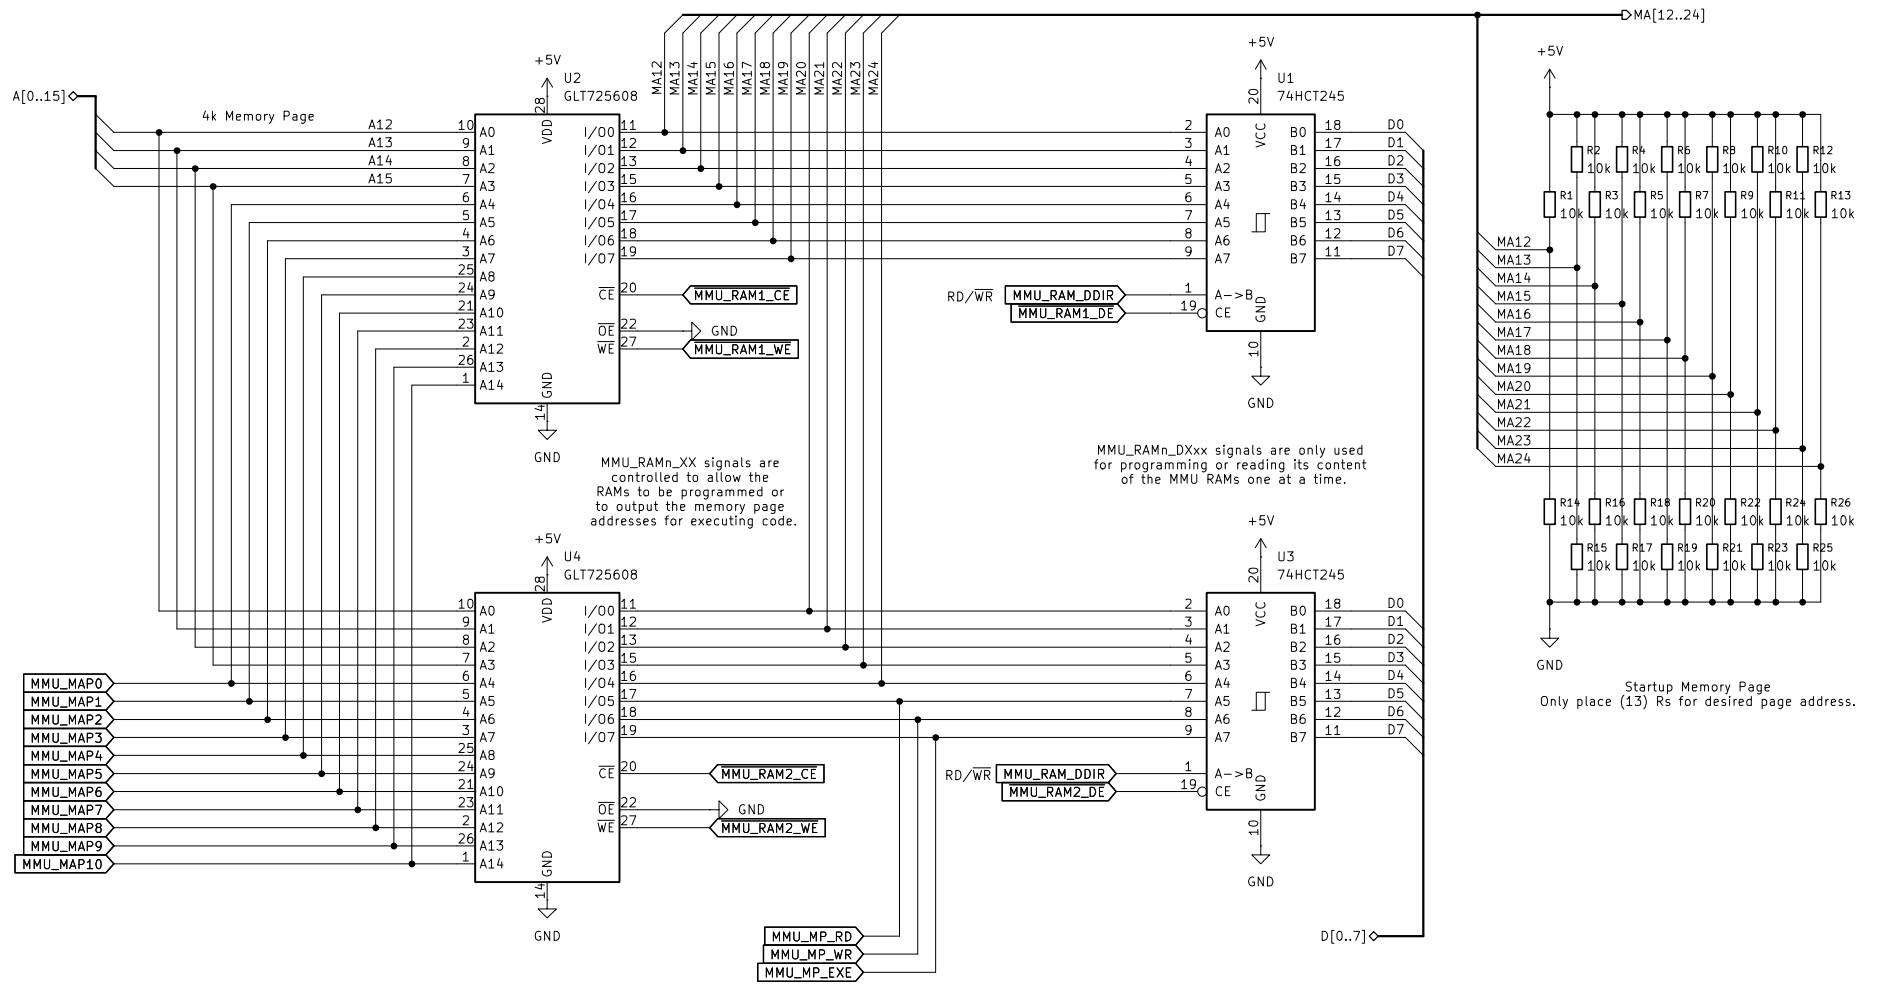








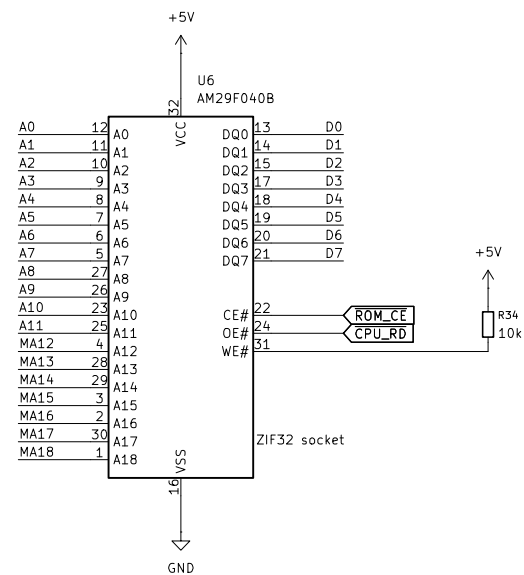


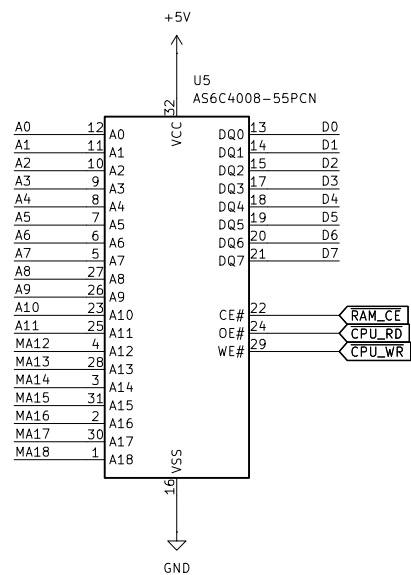

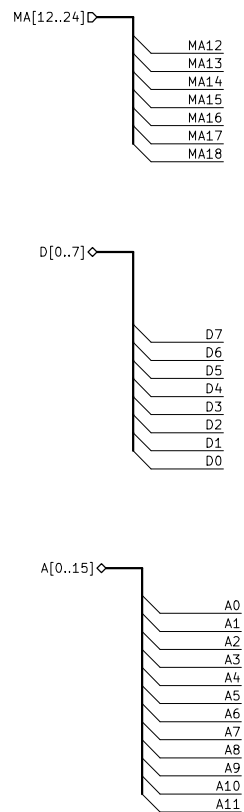






Pin assignments are flexible,
CLK20 must go on a GCKn pin.

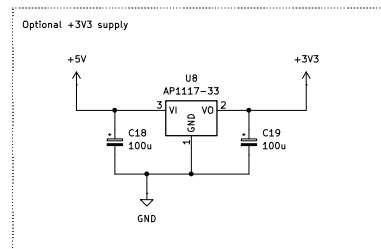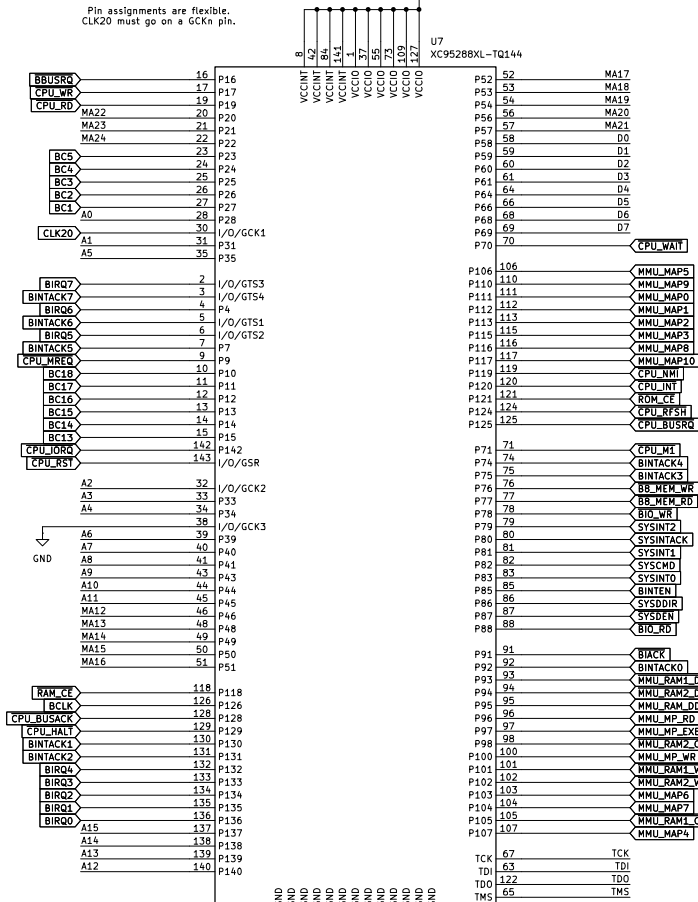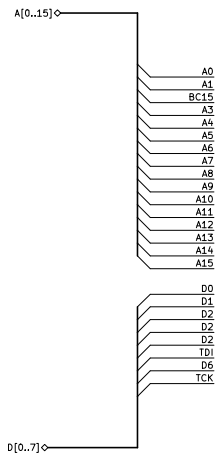

BIRQn: Interrupt request lines; lower 'n' is higher prio.
BIACK: Signal to release the BIRQn.
BINTEN: HI after the RETI instruction is detected.

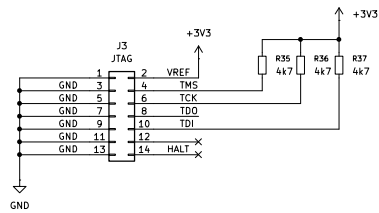

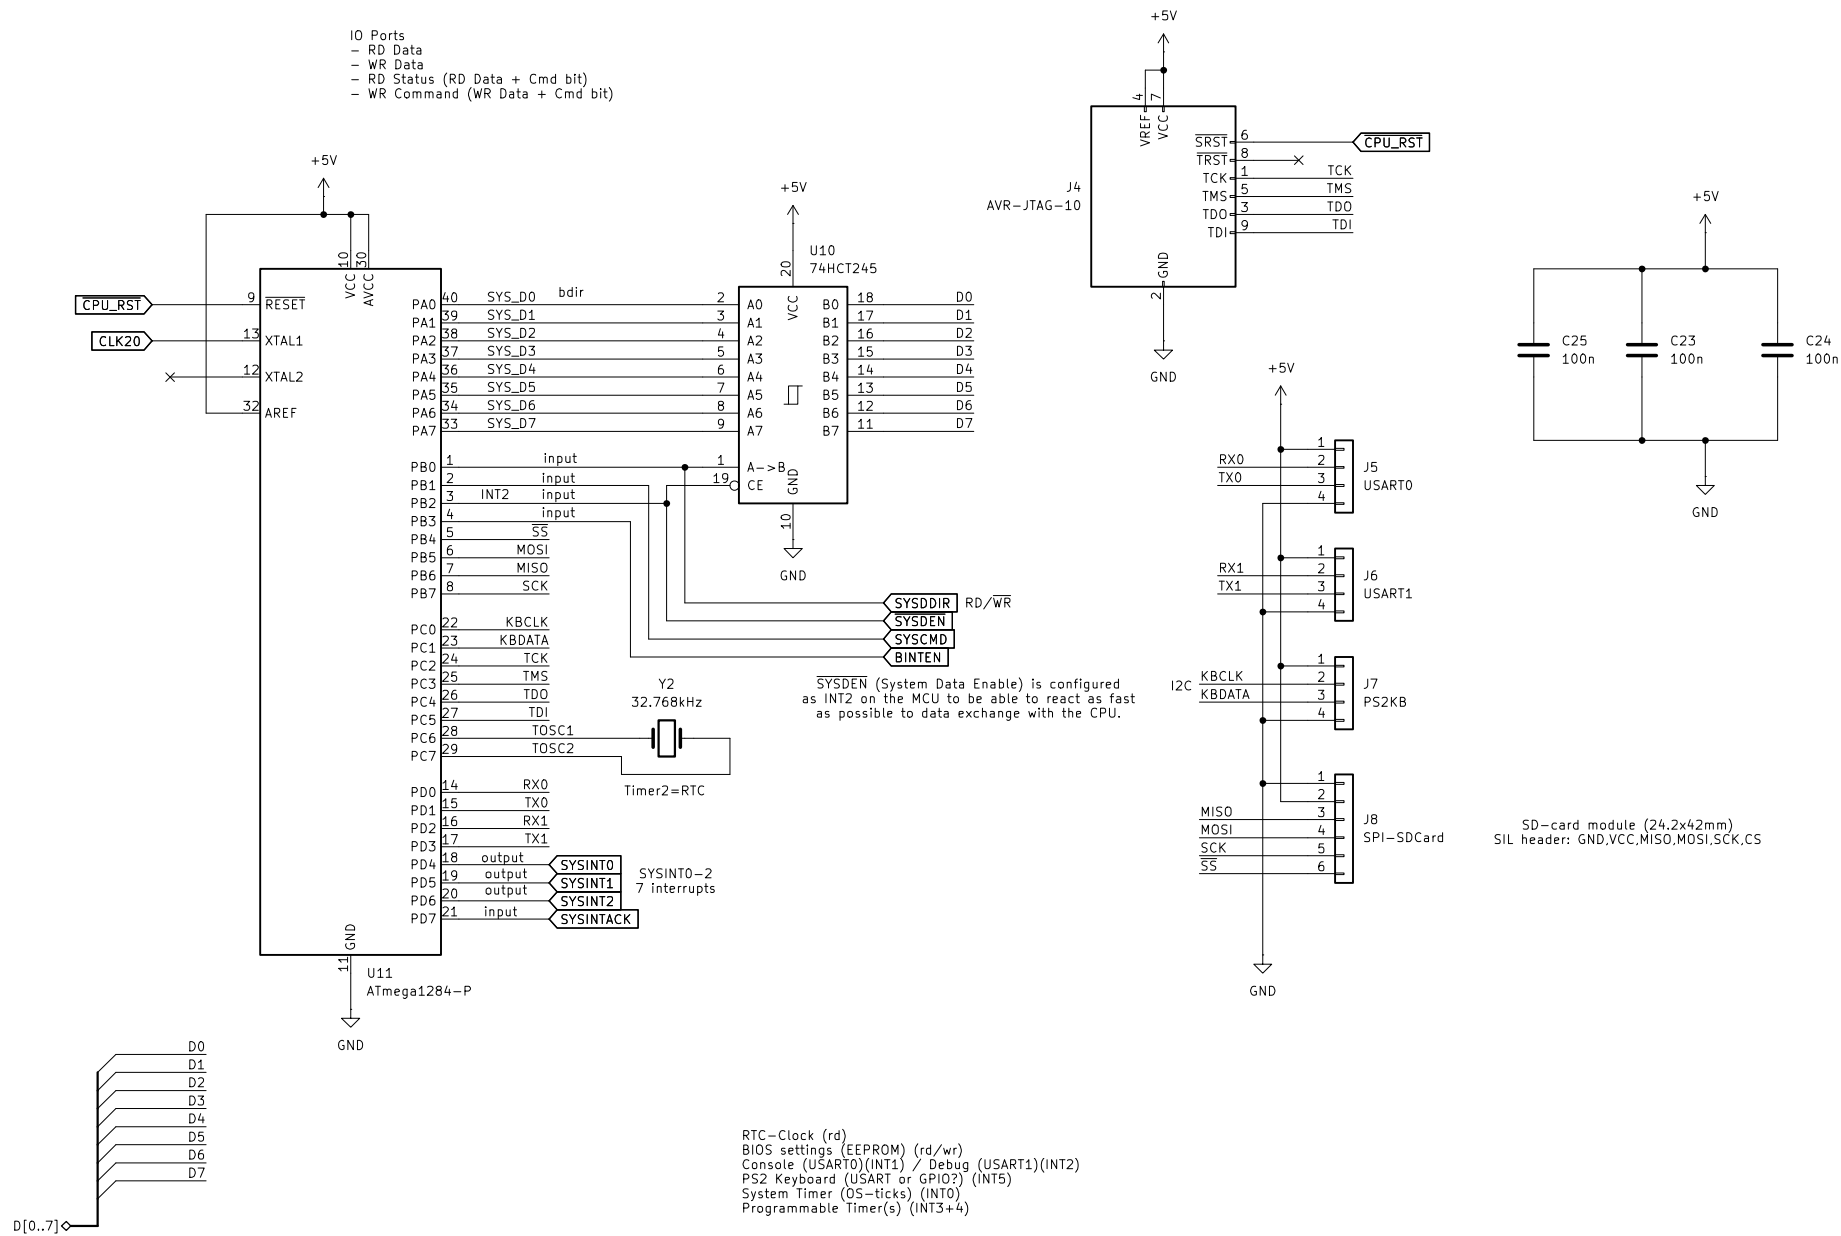

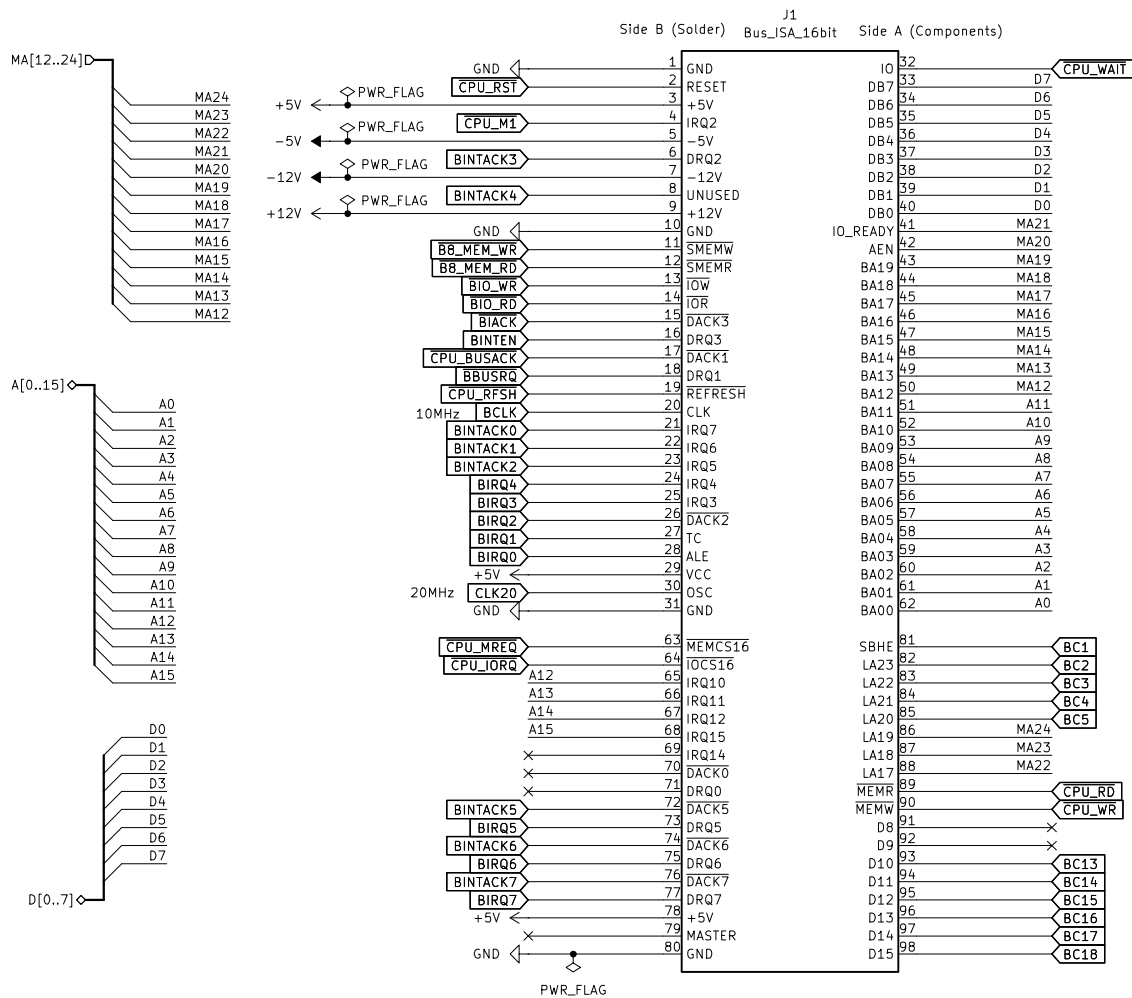

What is the max thickness of PCB that fits into ISA slot?
This seems to be 1.6mm.

5 bus signals not connected.
Can be used for inter-module signals.