

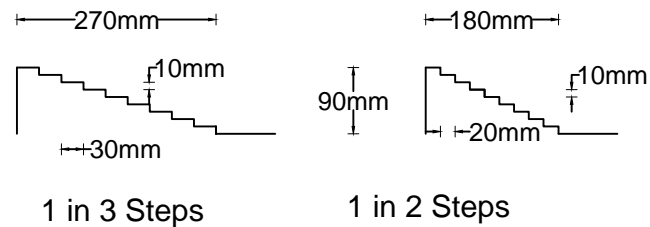


Each coastal defence is 90mm high and should be easily inserted and removed directly in front of the fixed vertical wall.


A breakwater structure should be able to be inserted and removed 650mm from the fixed wall.



Horizontal spacers 90mm high and 20mm wide to be inserted to the front of the fixed wall (maximum of 3) with coastal defences then fixed to the front of the horizontal spacers.

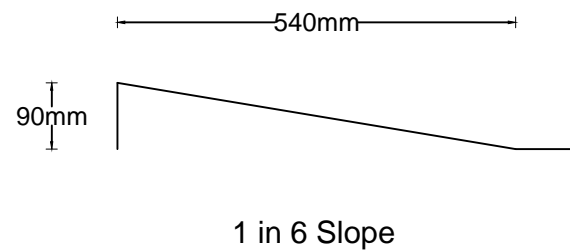

Offshore Breakwater
(inserted 650mm from
the coastal defence)

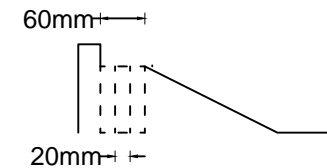

Horizontal Spacers
(can be added to all
defences)