


TRIDENT

FLOOD & SPORTS LIGHTS



Model No: LM-012-TRHMFL-1800W**

TECHNICAL DESCRIPTION

Trident Flood Lights are high quality Smart compatible flood light fittings designed for long life and low maintenance. Combined with the subtle closed design, Convenient for fast Installation, Tool-less access to open driver cover.


INSTALLATION

Suitable for installation to pole, Walls, Highmasts with Screws and Bolts.

AREAS OF APPLICATION

- Crane Lighting • Sports Lighting • Area Lighting • Factories
- Warehouses • Equipmetns • Street & High-Mast.

DIAGRAM

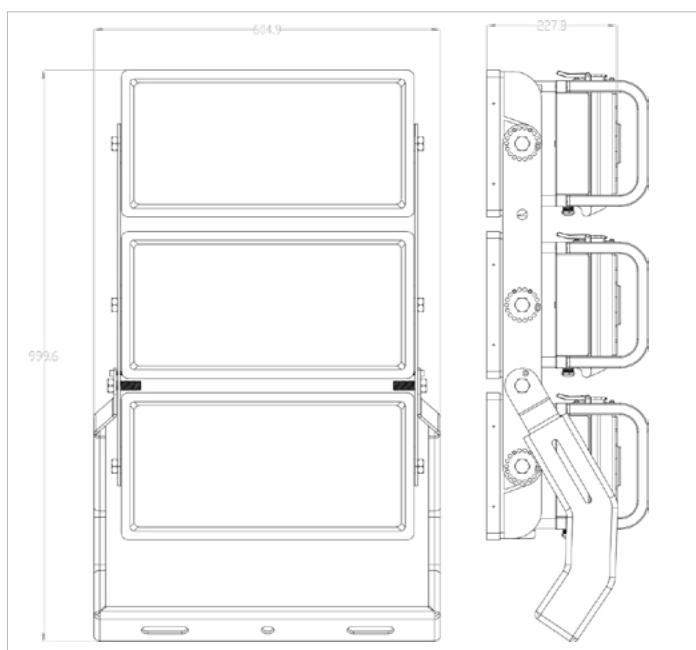


MODEL NUMBER SELECTION

LM-012-TRHMFL - 1800W

S- Non Dimmable
D - DALI
A - 0-10, 1-10
P - Phase

CW - 6500K
NW - 4000K
WW- 3000K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



PHYSICAL CHARACTERISTICS

Installation	Surface	IP-Rating	IP66
Driver	Integrated	IK-Rating	IK10
Dimension	L605 x B228 x H1000 (mm)	Fixture Material	Die Cast Aluminium
Diffuser	PC/Glass	Standard Finish	Silver Grey
Rotation	180°	Vibration test	1.5G Test
		Gross Weight	43kg±0.5kg

ELECTRICAL CHARACTERISTICS

Light Source	Lumiled	Beam Angle	30°/45°/60°
LED Power	1800W	Dimming Options	NON-DIM, PHASE, 1-10V, DALI
LED Luminous Flux	306000LM	Power Factor	0.95
Chromaticity Tolerance	SDCM≤4	Power Efficiency	92%
Color Rendering Index	≥70	Driver Options	LYTEMASTER / INVENTRONICS / MEANWELL
THD	<15%	Extended Configuration	5000K, 5700K
Color Temperature	3000K, 4000K, 6500K	Options On Request	NEMA SOCKET, VISOR, 10KV SPD

PRODUCT SPECIFICATION

Mains Volatge	AC100-277V AC400V for 3phase	Environmental Temp	-30°C ~ +55°C
Frequency	50/60 Hz	Rated Service Life (h)	50,000
Safety Class	I	Certification Compliance	CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.