


TRIDENT

FLOOD & SPORTS LIGHTS

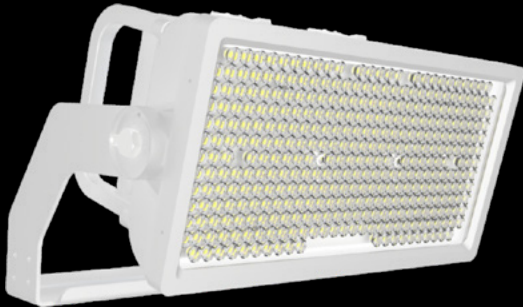

Model No: LM-012-TRHMFL-250W**

TECHNICAL DESCRIPTION

Trine Flood Lights are high quality flood light fittings designed for long life and low maintenance. Combined with the subtle closed design, this results in a much calmer ceiling appearance with increased efficiency.


INSTALLATION

Suitable for installation directly to walls or ceilings, indoors or outdoors.

AREAS OF APPLICATION

- Sports Lighting • Area Lighting • Factories,
- Warehouses • Street & High-Mast.

DIAGRAM

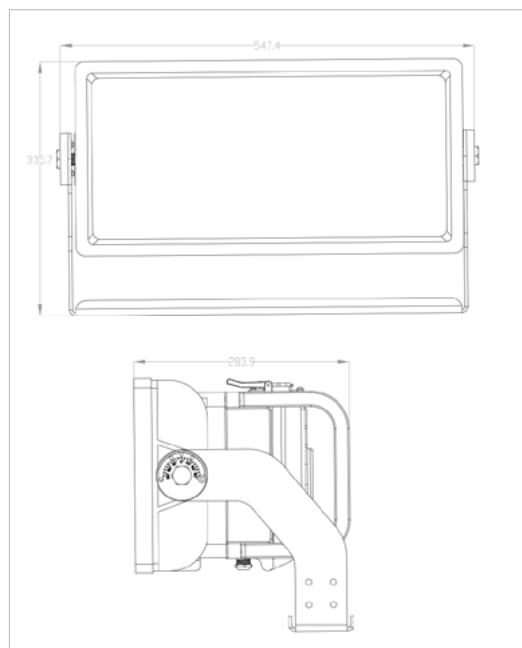


MODEL NUMBER SELECTION

LM-012-TRHMFL - 250W

S - Non Dimmable
D - DALI
A - 0-10, 1-10
P - Phase

CW - 6500K
NW - 4000K
WW - 3000K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



PHYSICAL CHARACTERISTICS

Installation	Surface	IP-Rating	IP66
Driver	Integrated	IK-Rating	IK10
Dimension	L547.4 x B335.7 x H283.9 (mm)	Fixture Material	Die Cast Aluminium
Diffuser	PC/Glass	Standard Finish	
Rotation	180°	Gross Weight	15kg±0.5kg

ELECTRICAL CHARACTERISTICS

Light Source	Bridgelux	Beam Angle	30°/45°/60°
LED Power	250W	Dimming Options	NON-DIM, PHASE, 1-10V, DALI
LED Luminous Flux	41474lm	Power Factor	0.95
Chromaticity Tolerance	SDCM≤6	Power Efficiency	92%
Color Rendering Index	≥70	Driver Options	LYTEMASTER / MEANWELL / TRIDONIC
THD	<15%	Extended Configuration	5000K, 5700K
Color Temperature	3000K, 4000K, 6500K	Options On Request	MICRO WAVE SENSOR DAYLIGHT SENSOR

PRODUCT SPECIFICATION

Mains Voltage	AC100-277V	Environmental Temp	-30°C ~ +45°C
Frequency	50/60 Hz	Rated Service Life (h)	50,000
Safety Class	I	Certification Compliance	CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.