
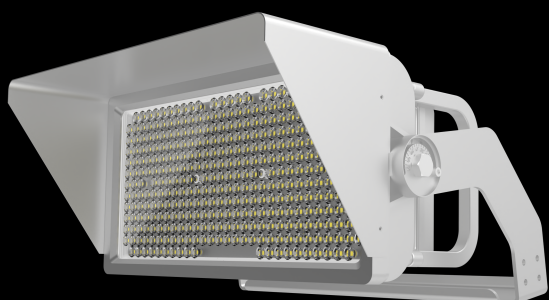


TRIDENT

FLOOD & SPORTS LIGHTS

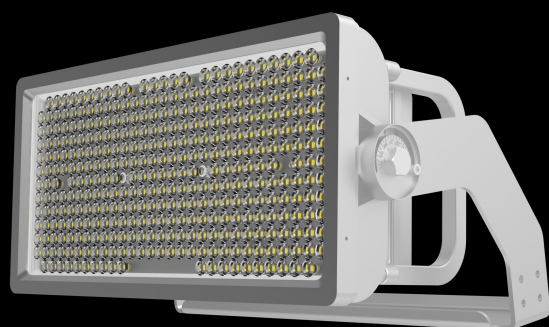

Model No: LM-012-TRHMFL-300W**

TECHNICAL DESCRIPTION

Trident Flood Lights are high quality Smart compatible flood light fittings designed for long life and low maintenance. Combined with the subtle closed design, Convenient for fast Installation, Tool-less access to open driver cover.


INSTALLATION

Suitable for installation to pole, Walls, Highmasts with Screws and Bolts.

AREAS OF APPLICATION

- Crane Lighting • Sports Lighting • Area Lighting • Factories
- Warehouses • Equipmetns • Street & High-Mast.

DIAGRAM

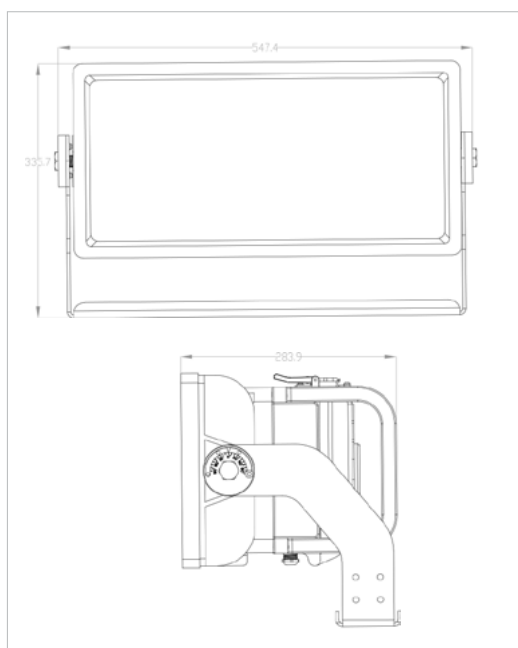


MODEL NUMBER SELECTION

LM-012-TRHMFL - 300W

S- Non Dimmable
D - DALI
A - 0-10, 1-10
P - Phase

CW - 6500K
NW - 4000K
WW- 3000K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM



PHYSICAL CHARACTERISTICS

Installation	Surface
Driver	Integrated
Dimension	L547.4 x B335.7 x H283.9 (mm)
Diffuser	PC/Glass
Rotation	180°
Marine Grade Protection	Yes

IP-Rating	IP66
IK-Rating	IK10
Fixture Material	Die Cast Aluminium
Standard Finish	Silver Grey
Vibration test	5G Test
Gross Weight	15kg±0.5kg

ELECTRICAL CHARACTERISTICS

Light Source	Lumiled
LED Power	300W
LED Luminous Flux	54000lm
Chromaticity Tolerance	SDCM≤4
Color Rendering Index	≥70
THD	<15%
Color Temperature	3000K, 4000K, 6500K

Beam Angle	30°/45°/60°
Dimming Options	NON-DIM, PHASE, 1-10V, DALI
Power Factor	0.95
Power Efficiency	92%
Driver Options	LYTEMASTER / INVENTRONICS / MEANWELL
Extended Configuration	5000K, 5700K
Options On Request	NEMA Socket, Visor, 10KV SPD

PRODUCT SPECIFICATION

Mains Volatge	AC100-277V AC400V for 3phase
Frequency	50/60 Hz
Safety Class	I

Environmental Temp	-30°C ~ +45°C
Rated Service Life (h)	50,000
Certification Compliance	CE, RoHS

Notice: We reserve the right to make the technical changes without notice. Please contact our sales office for further information.