40 mm ArUco marker

DICT_4X4_50 | ID 0 | A4 | Print at Actual Size / 100%

Disable Fit, Shrink and Scale to printable area. Measure both outer black edges after printing: each must be 40.00 mm. Fix the print scaling and reprint if needed.

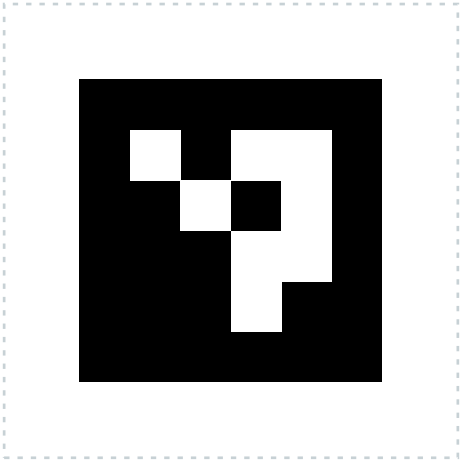

Cut outside the dotted line. Keep the 10 mm white border.

CHECK THE PRINT SCALE

End-to-end length: 100.00 mm

MOUNT AND RECORD

Mount on flat, matte, rigid card. Put the marker in the same plane as the surface being measured. Keep all four corners and the white border visible; avoid glare, bends and motion blur.

Printed black width: _____ mm Height: _____ mm

100 mm bar measured: _____ mm Checked by: _____

Date: _____ Marker ID: 0 Dictionary: DICT_4X4_50

Bench setup and capture

Complete these physical steps, then record the measured ground truth below.

- [ ] **1 Calibrate**

  Print and measure page 1. Mount the 40 mm marker flat beside the measured surface.

- [ ] **2 Decking boards**

  Suggested angle targets: 0, 4 and 8 degrees. Set them with a protractor; measure and record actual angle and gap with a ruler or caliper.

- [ ] **3 Tabletop trench**

  Suggested slope targets: 20, 35 and 50 degrees from horizontal. Build rigid model walls and record each actual measured slope.

- [ ] **4 Push-fit joint**

  Use an unpressurized bench fixture. Mark the manufacturer's insertion depth. Record one deliberately unseated joint, then seat it correctly and keep the original audio.

- [ ] **5 Outdoor clips**

  Record the corresponding surfaces with the marker visible in their measurement plane. Include daylight and a challenging condition such as shade or glare.

Capture 8-10 seconds per clean clip, including about 3 seconds around a joint-seating event. Keep original files and audio. Suggested setpoints above are test fixtures, not policy thresholds or measured results.

CAPTURE LOG - FILL WITH YOUR MEASUREMENTS

Clip ID	Scene	Actual value + unit	Condition / seat state	File saved?

Clean inputs: data/clips/clean/ Outdoor originals: data/clips/outdoor/