


Heavy-Duty PVC Or Urethane For Harbors, Ports & Dry Docks

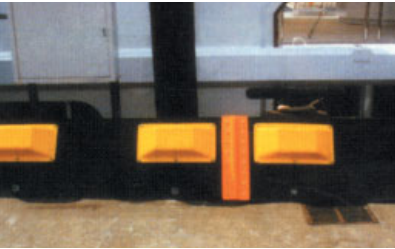

Freeboard	11 inches
Draft	13 inches
Length (STD)	100 ft.
Connector	ASTM or Universal Slide PVC (Color: Black) with Stainless Steel Bolts
Weight	4.3 lbs. / ft.
Reserve Buoyancy	6.9 lbs. / ft.
Flotation (STD)	High Density Polyethylene Shell (Color: International Orange) with Antioxidants & UV Stabilizer, filled with Closed-Cell Urethane Foam
Ballast Type	Lead Weights with Stainless Steel Bolts
Ballast Weight	1/2 lb. / ft.
Barrier Material (STD)	80 oz. Double Impregnated PVC Polyester Fabric Belting with UV & Growth Inhibitors (Color: Black)
	OR
	80 oz. Polyester Fabric Belting – Double Impregnated with PTMEG (Urethane), with UV & Growth Inhibitors (Color: International Orange)*
Tensile Strength (Warp)	PVC: 36,000 lbs. Break Strength / 8,000 lbs. Working Strength Urethane: 33,600 lbs. (1,400 lbs. / in.)
Tear Strength (Fill)	PVC: 1,500 lbs. Urethane: 16,800 lbs. (700 lbs. / in.)
Abrasion Resistance (Taber)	PVC: 1,000 cycles – H-18 wheel, 1 Kg Load Urethane: 5,000 cycles – H-18 wheel, 1 Kg Load
Fire Resistance	PVC: Belting is Self-Extinguishing Urethane: NOT Self-Extinguishing
Storage Volume	1.6 cu. ft. / ft.

* **Also available:** 100 oz. Polyester Fabric Belting – Double Impregnated with PTMEG (Urethane),
with UV & Growth Inhibitors (Color: International Orange)