


## Heavy-Duty PVC Or Urethane For Harbors & Offshore

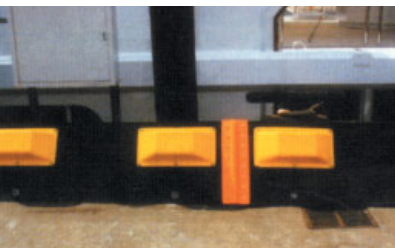

<b>Freeboard</b>	12 inches
<b>Draft</b>	24 inches
<b>Length (STD)</b>	100 ft.
<b>Connector</b>	ASTM or Universal Slide PVC (Color: Black) with Stainless Steel Bolts
<b>Weight</b>	7.0 lbs. / ft.
<b>Reserve Buoyancy</b>	8.9 lbs. / ft
<b>Flotation (STD)</b>	High Density Polyethylene Shell (Color: International Orange) with Antioxidants & UV Stabilizer, filled with Closed-Cell Urethane Foam
<b>Ballast Type</b>	Lead Weights with Stainless Steel Bolts
<b>Ballast Weight</b>	1 lb. / ft.
<b>Barrier Material (STD)</b>	80 oz. Double Impregnated PVC Polyester Fabric Belting with UV & Growth Inhibitors (Color: Black)
	<b>OR</b>
	80 oz. Polyester Fabric Belting – Double Impregnated with PTMEG (Urethane), with UV & Growth Inhibitors (Color: International Orange)*
<b>Tensile Strength (Warp)</b>	<b>PVC:</b> 54,000 lbs. Break Strength / 10,000 lbs. Working Strength <b>Urethane:</b> 50,400 lbs. (1,400 lbs./in.)
<b>Tear Strength (Fill)</b>	<b>PVC:</b> 1,500 lbs. <b>Urethane:</b> 25,200 lbs. (700 lbs. / in.)
<b>Abrasion Resistance (Taber)</b>	<b>PVC:</b> 1,000 cycles – H-18 wheel, 1 Kg. Load <b>Urethane:</b> 5,000 cycles – H-18 wheel, 1 Kg. Load
<b>Fire Resistance</b>	<b>PVC:</b> Belting is Self-Extinguishing <b>Urethane:</b> NOT Self-Extinguishing
<b>Storage Volume</b>	2.5 cu. ft. / ft.

\* **Also available:** 100 oz. Polyester Fabric Belting – Double Impregnated with PTMEG (Urethane), with UV & Growth Inhibitors (Color: International Orange)