


Test-set accuracy against measured edge-device latency
Marker size proportional to parameter count; error bars ± 1 std across folds

Performance-latency trade-off

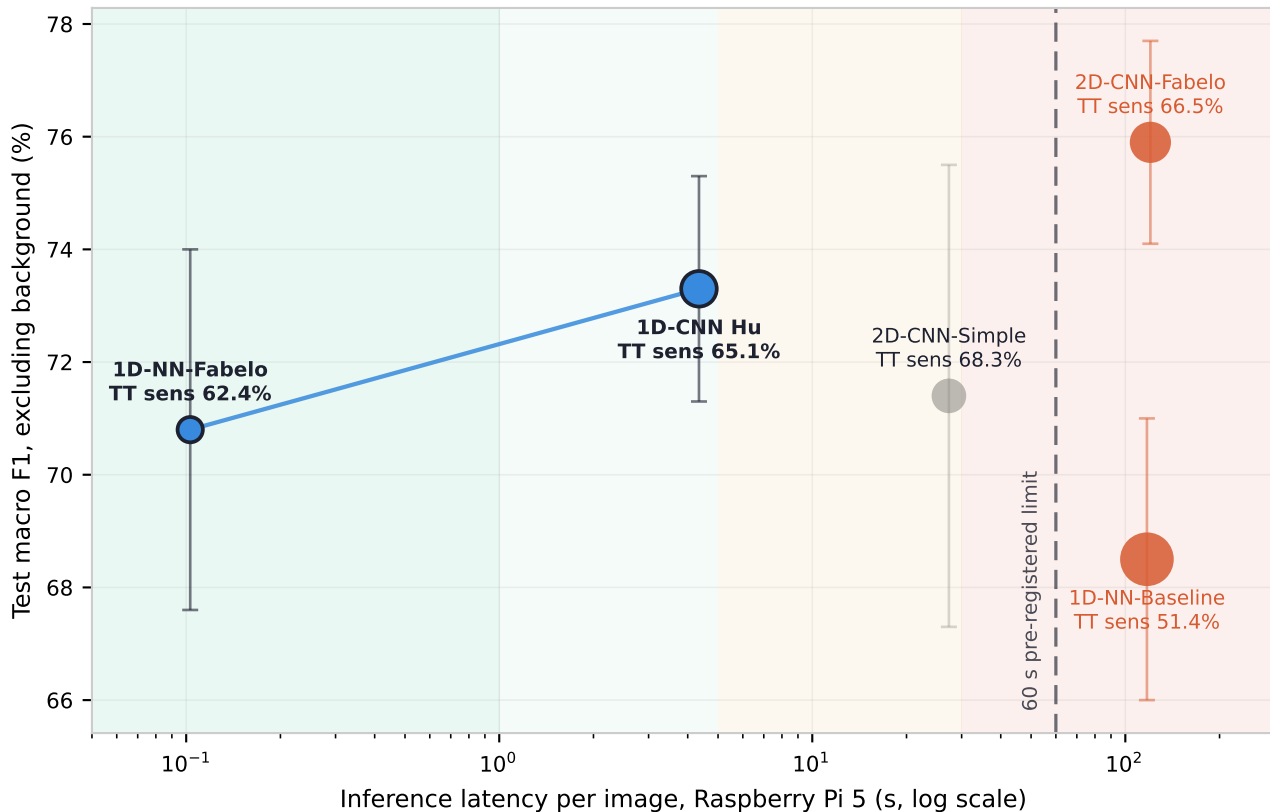

- Pareto-optimal (viable)
- Exceeds 60 s constraint
- Workflow-compatible (5-30 s)
- Dominated
- Interactive / responsive (< 5 s)
- Disruptive (> 30 s)