SCANNER CALIBRATION TARGET — CUT-OUT SQUARE

Cut along the dashed line. The square is 80 × 80 mm and fits any scanner bed at any 90° rotation.

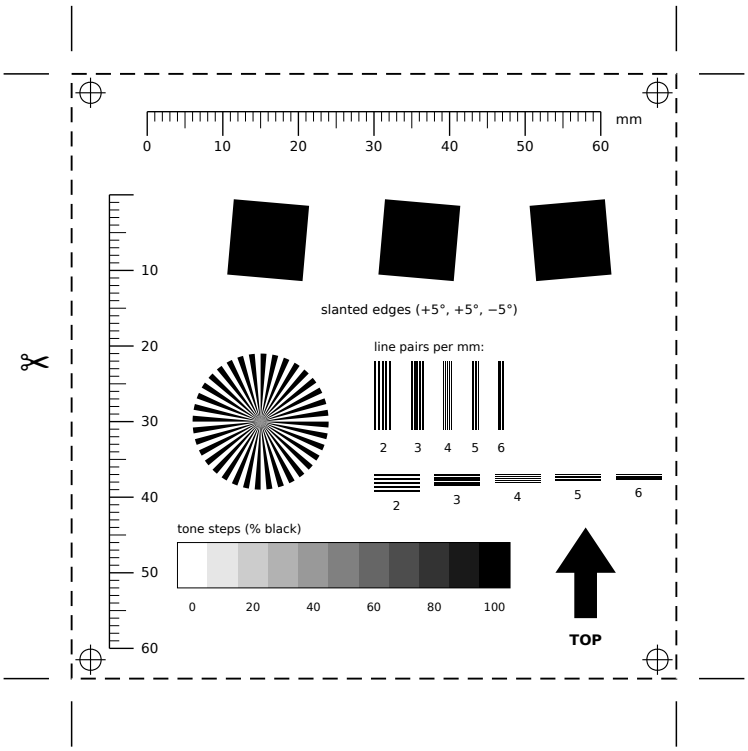

HOW TO USE

1. Print this page at 100 % / ACTUAL SIZE on US Letter (no “fit to page”). A laser printer gives crisper edges.
Check: the 60 mm rulers must measure 60 mm with a physical ruler.
2. Cut out the square along the dashed line (a little extra white margin is fine; the target has a built-in margin).
3. SCAN A: square face down, arrow (TOP) pointing toward the far (hinge) edge of the glass.
SCAN B: the same square rotated 90° clockwise. Place it in the same spot on the glass, lid closed, flat.
4. SETTINGS: 1200 ppi, grayscale 8- or 16-bit, TIFF or PNG (no JPEG), same as the card scans.
Turn OFF sharpening, descreen, dust removal, auto-levels and auto-rotate/deskew.
5. Optional: repeat each orientation once more, and scan once in the position where you usually scan cards.