DTI Project

SC02 Group 1

Who?

Cleaning Staff

Problem Statement

How might we create an effective cleaning solution to improve hygiene standards and efficiency for cleaning staff?

Trash? CAN!

SC02 Group 1

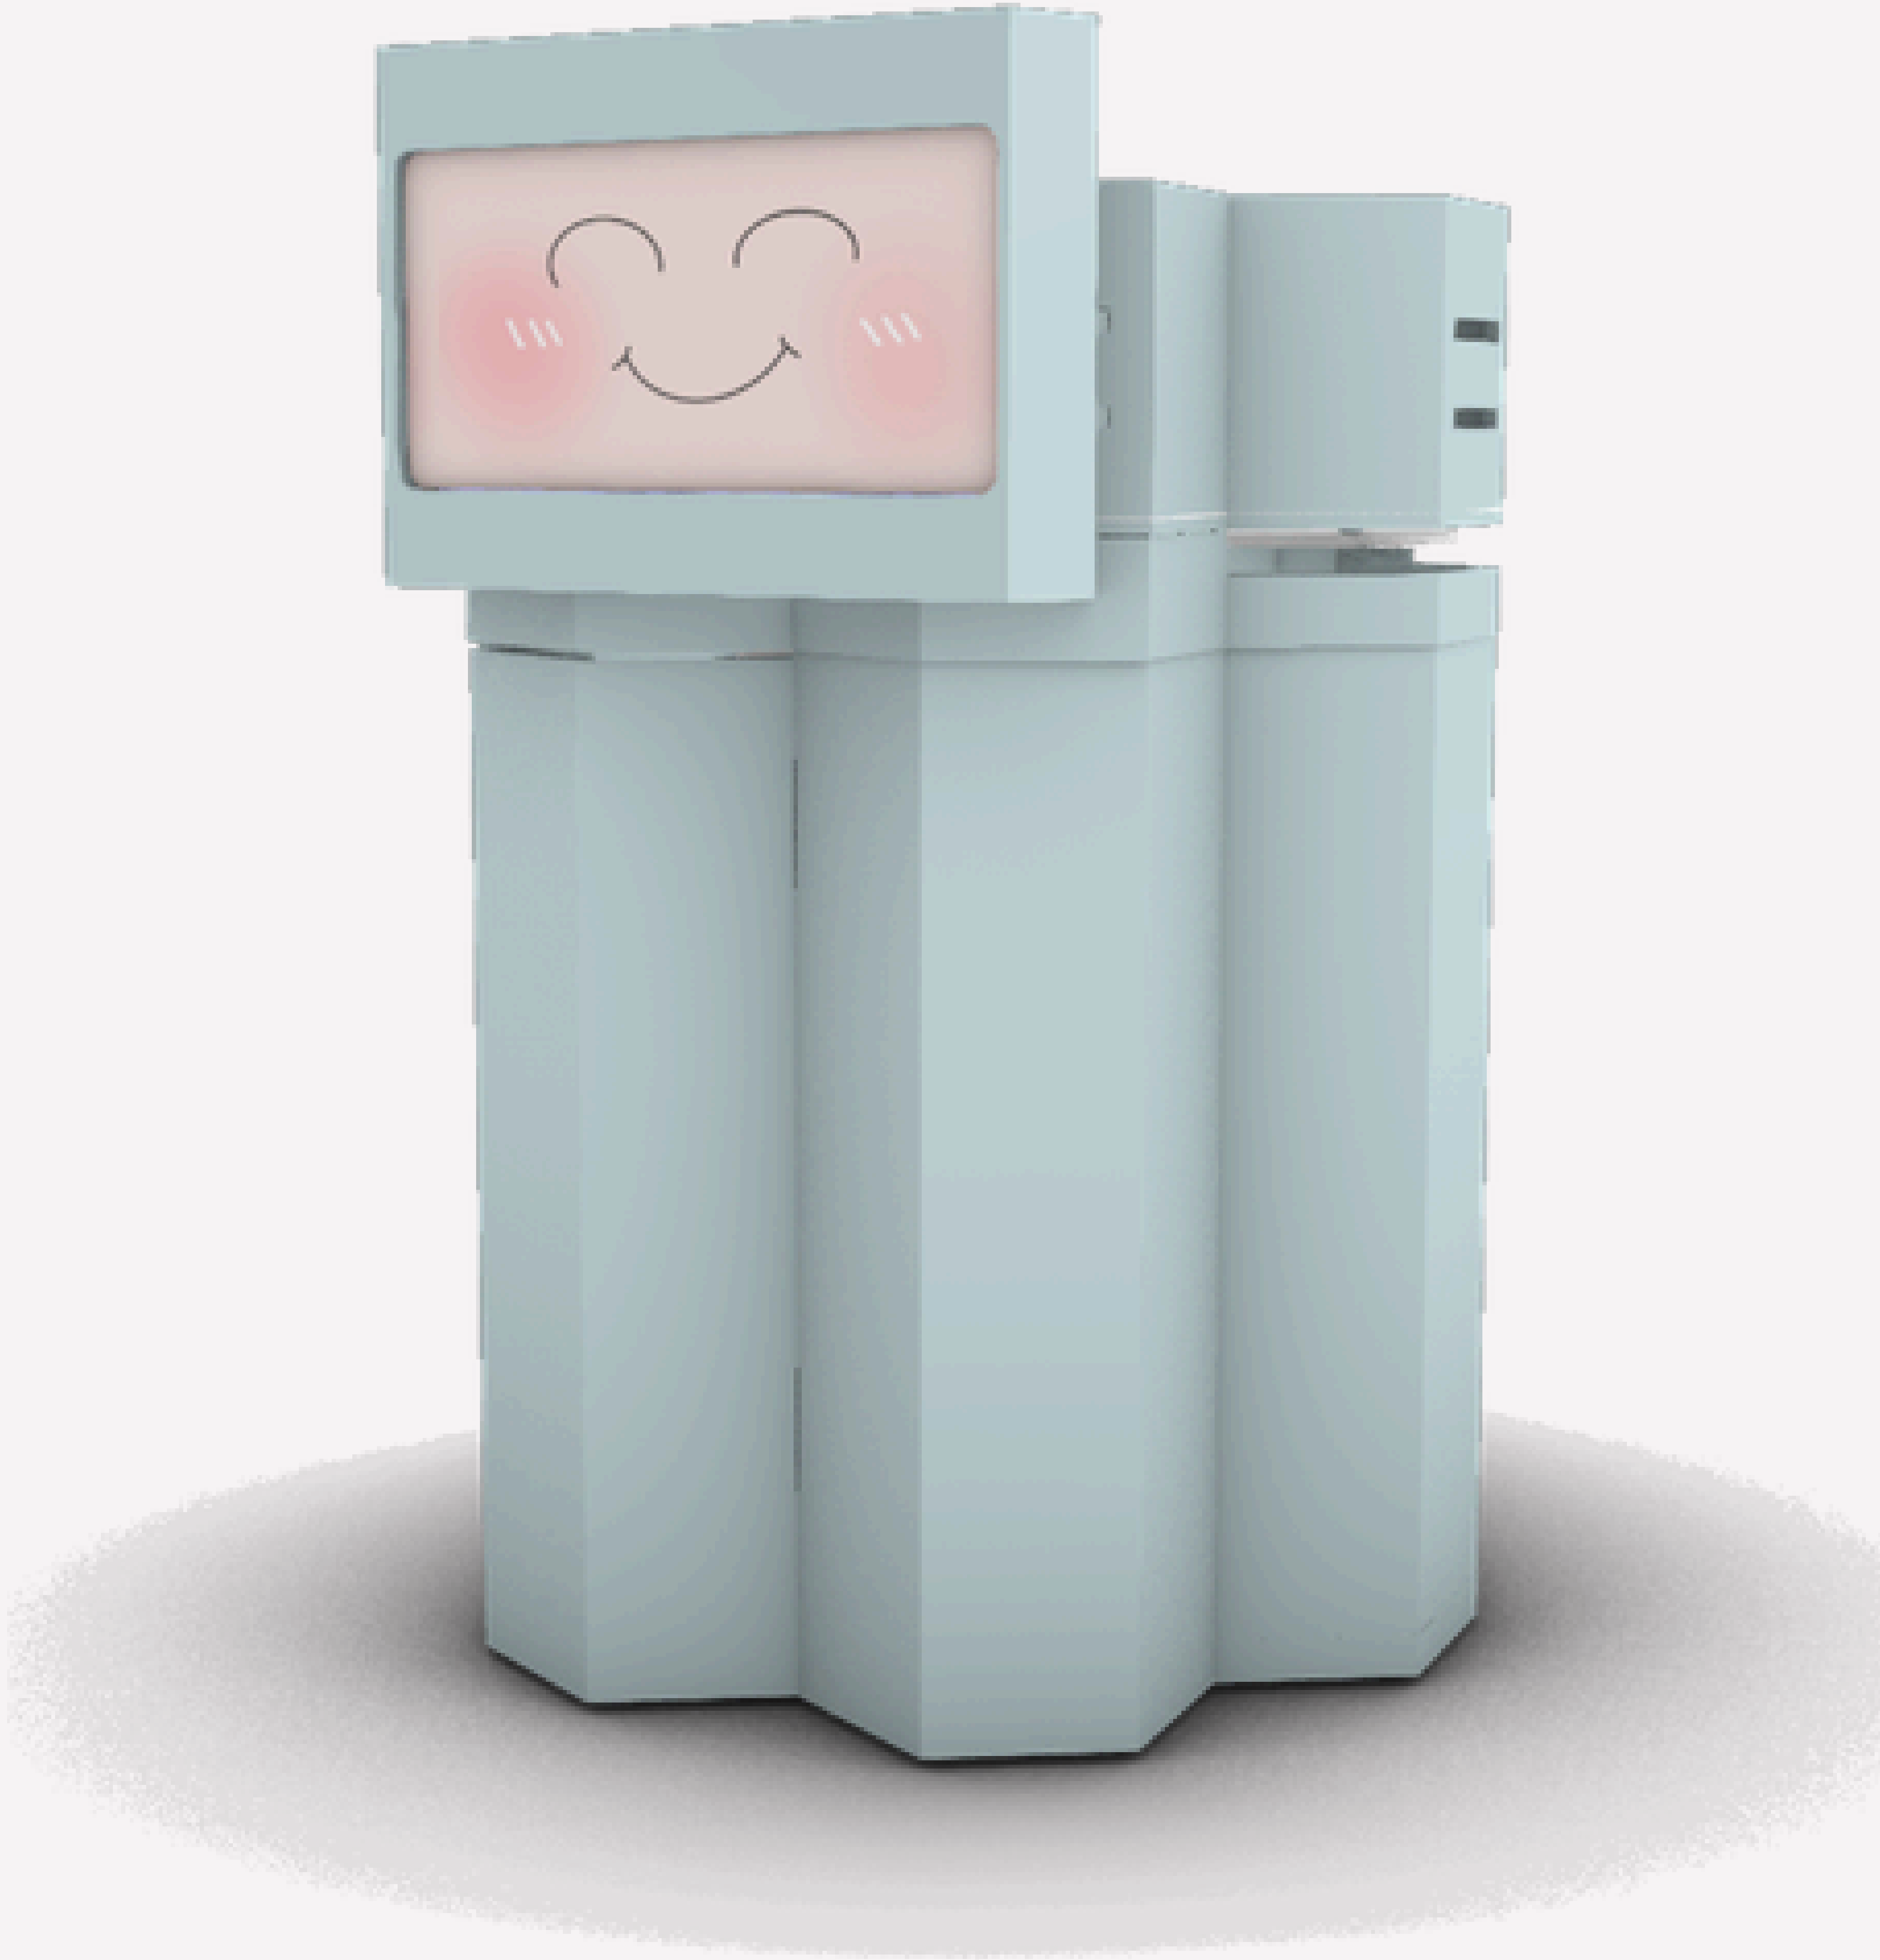

Combined systems prototype

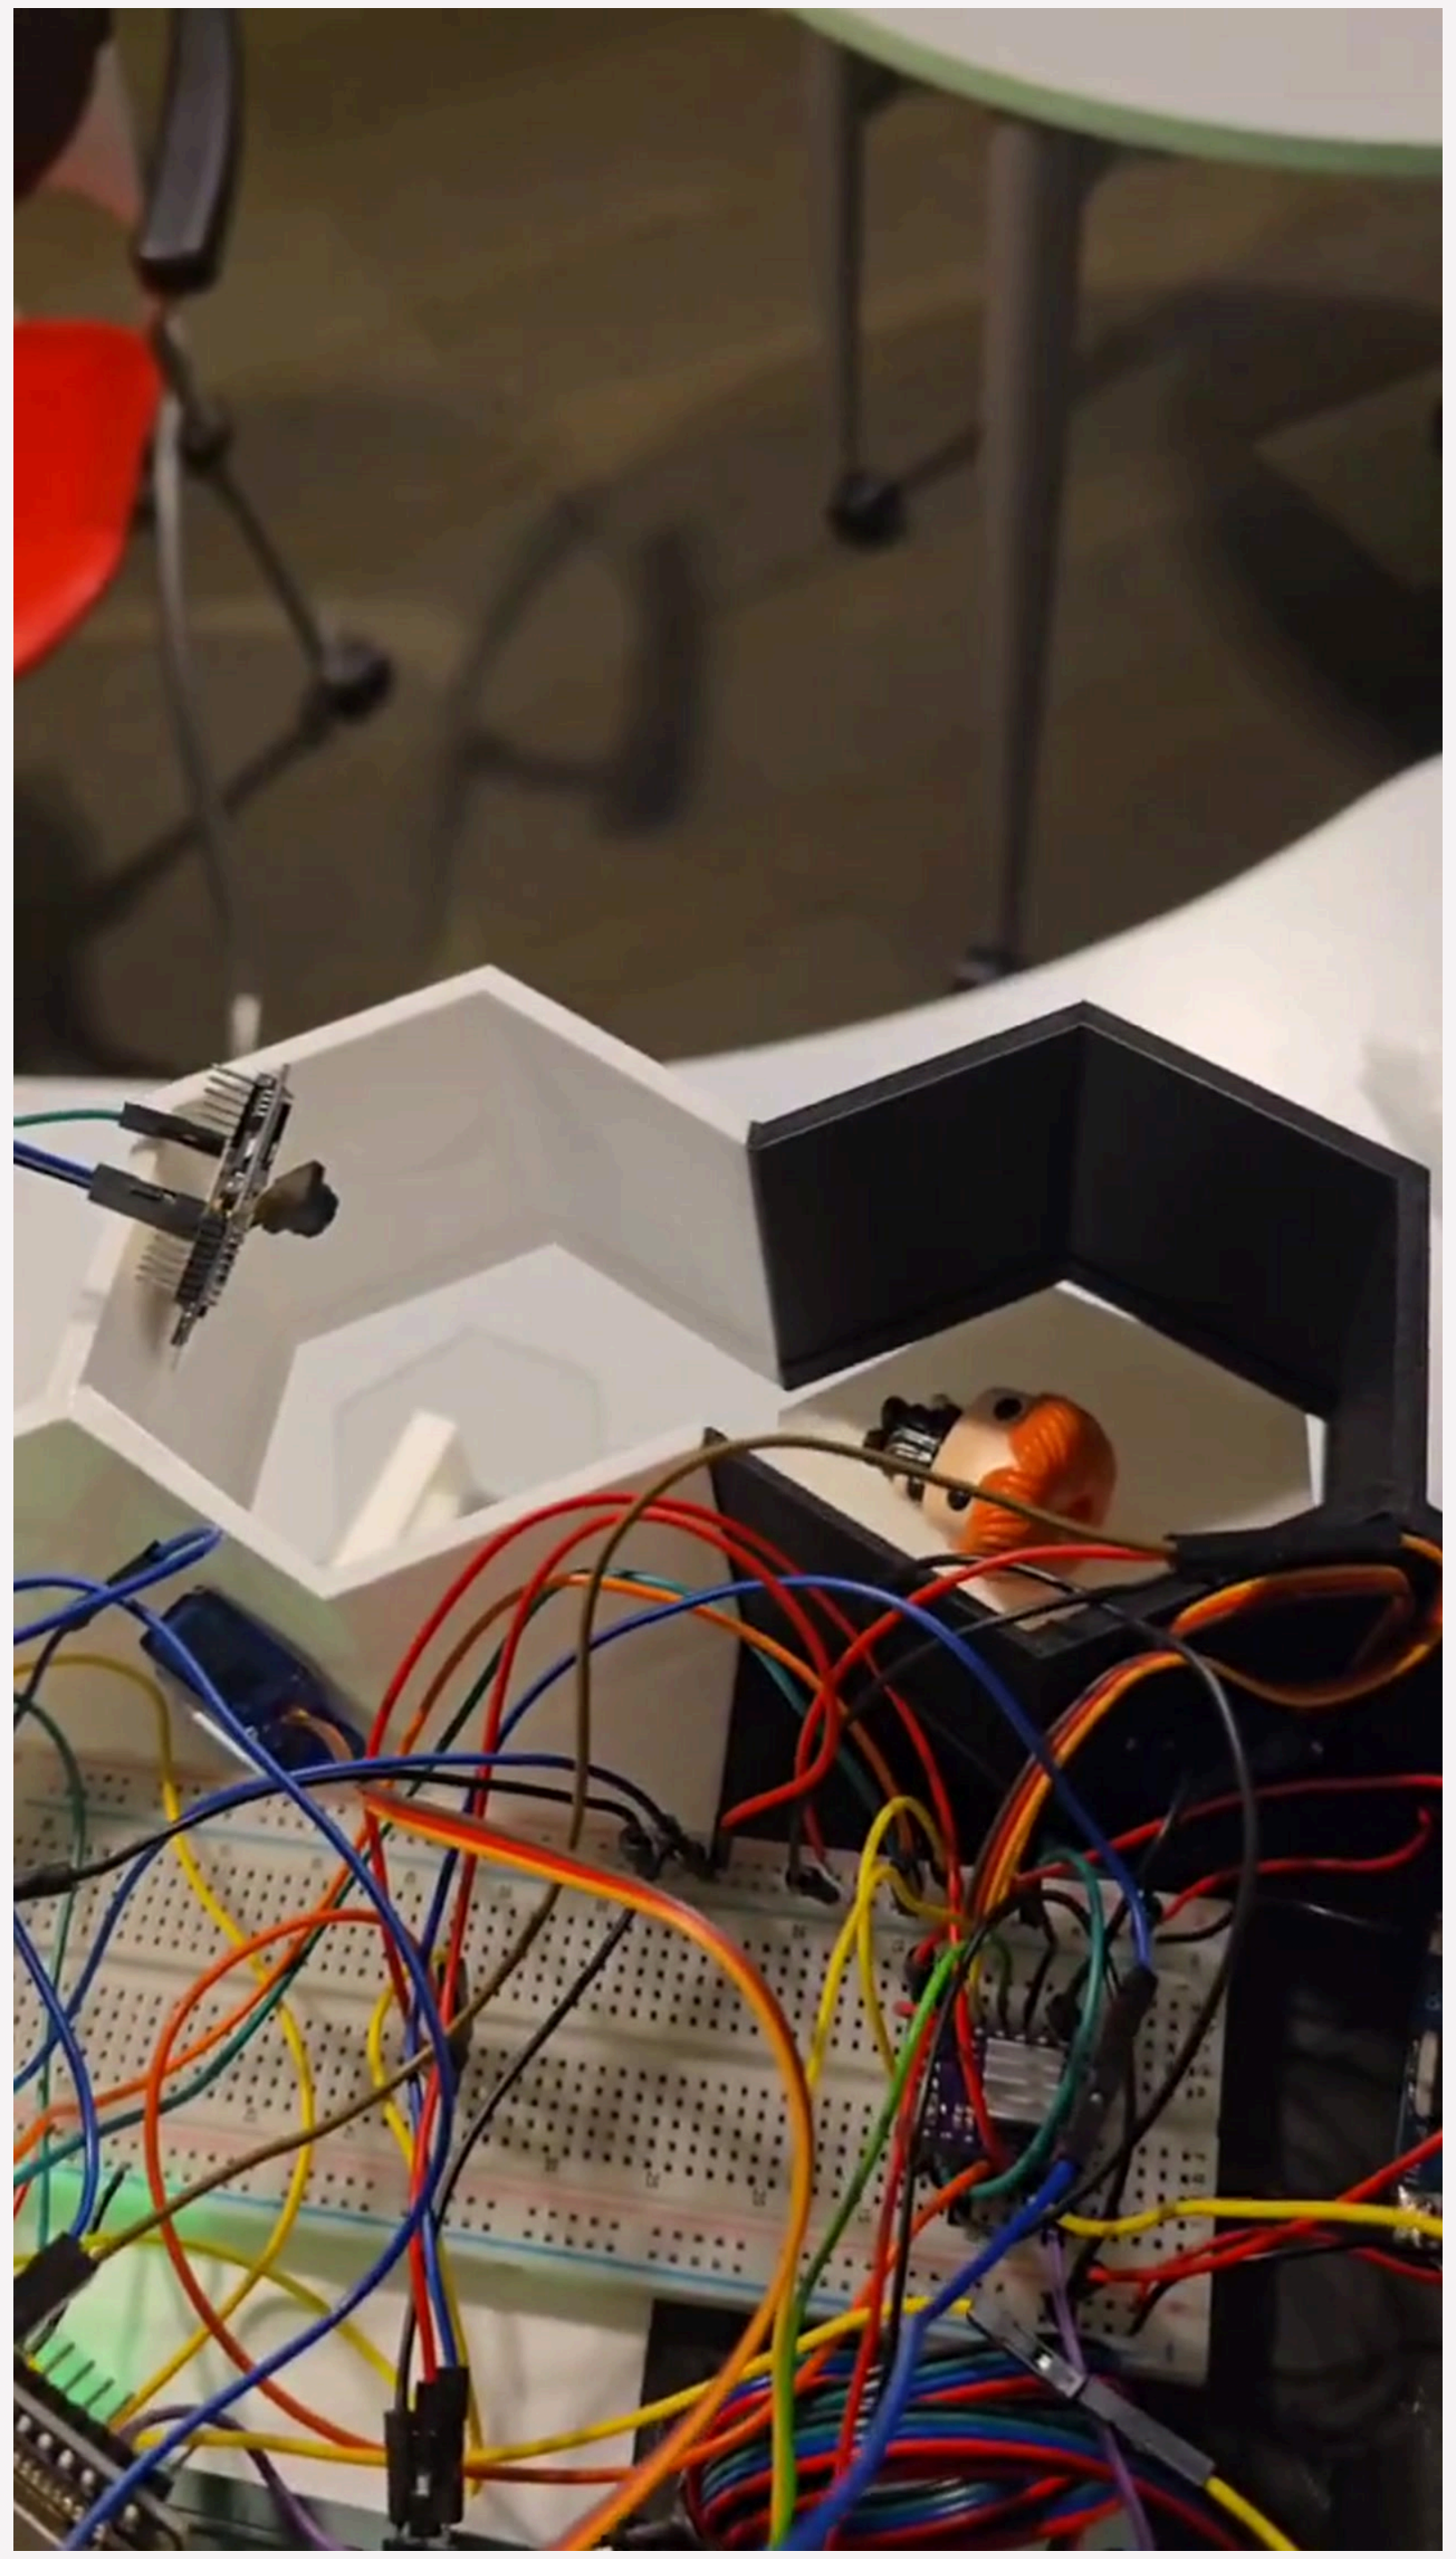

Our Team

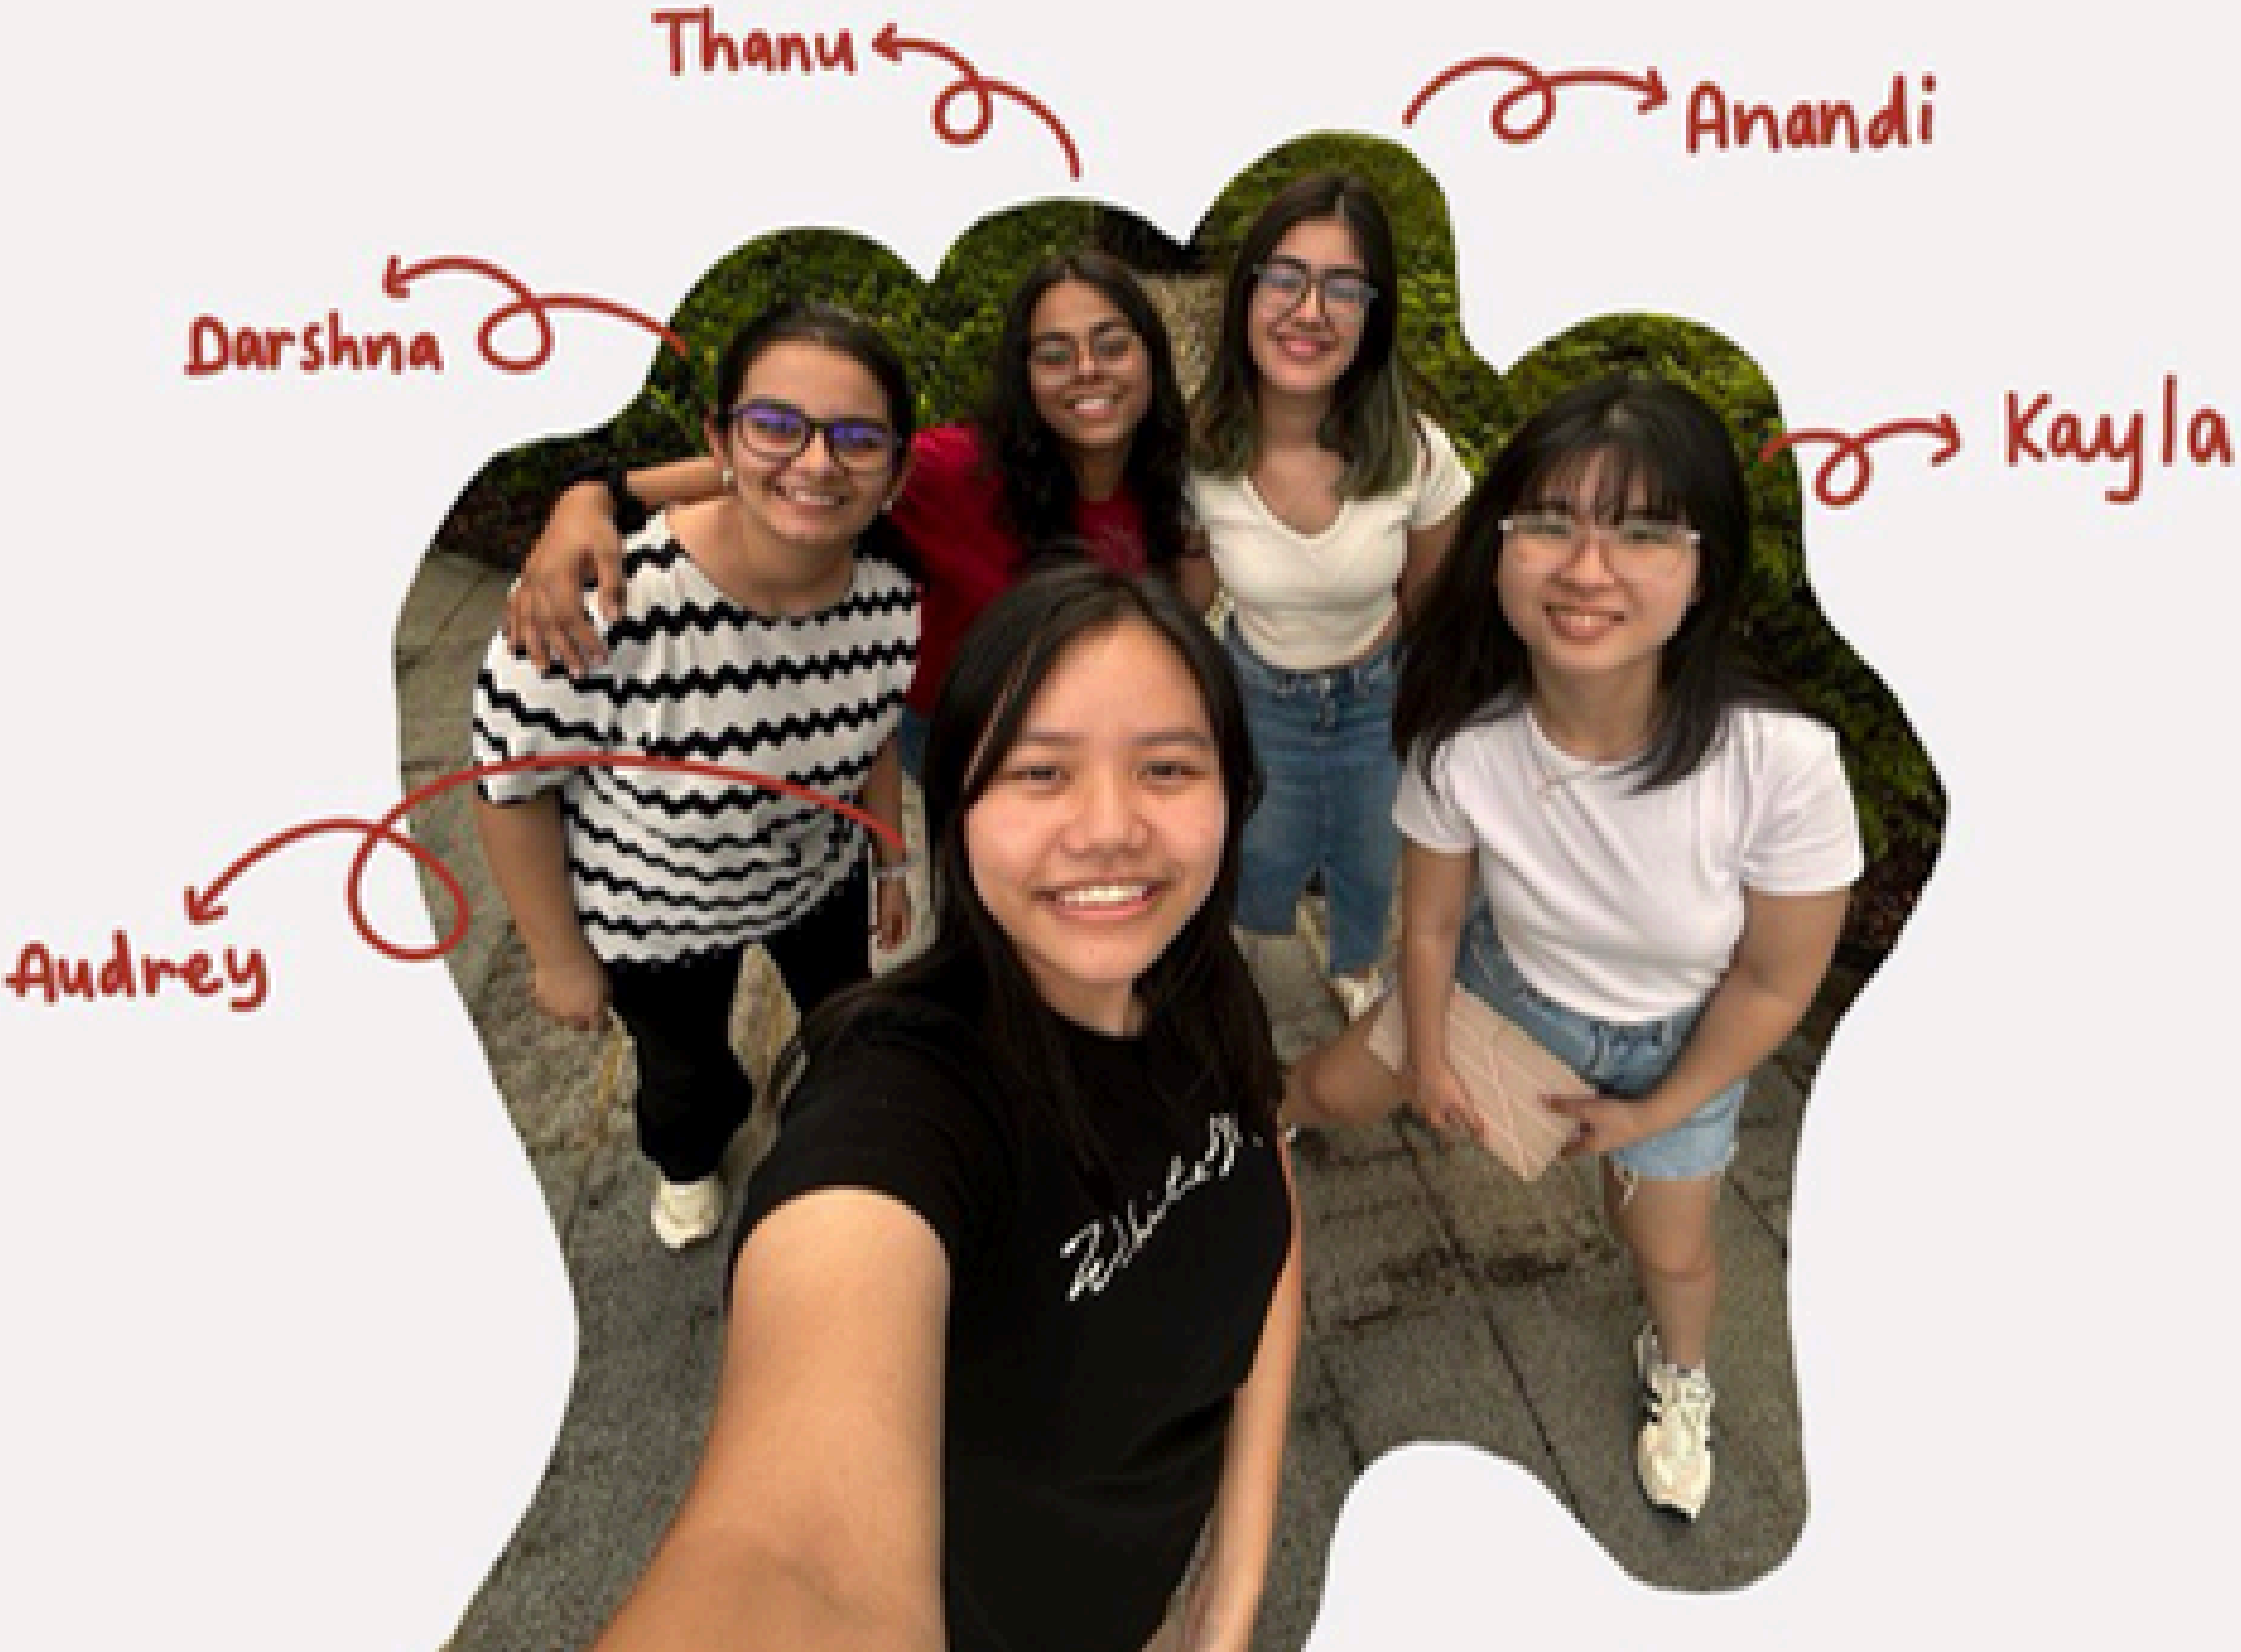


DTI project Group 1 SC02
Anandi Mehrotra
White Mode
Watch on YouTube

Where?

SUTD **Hostel**

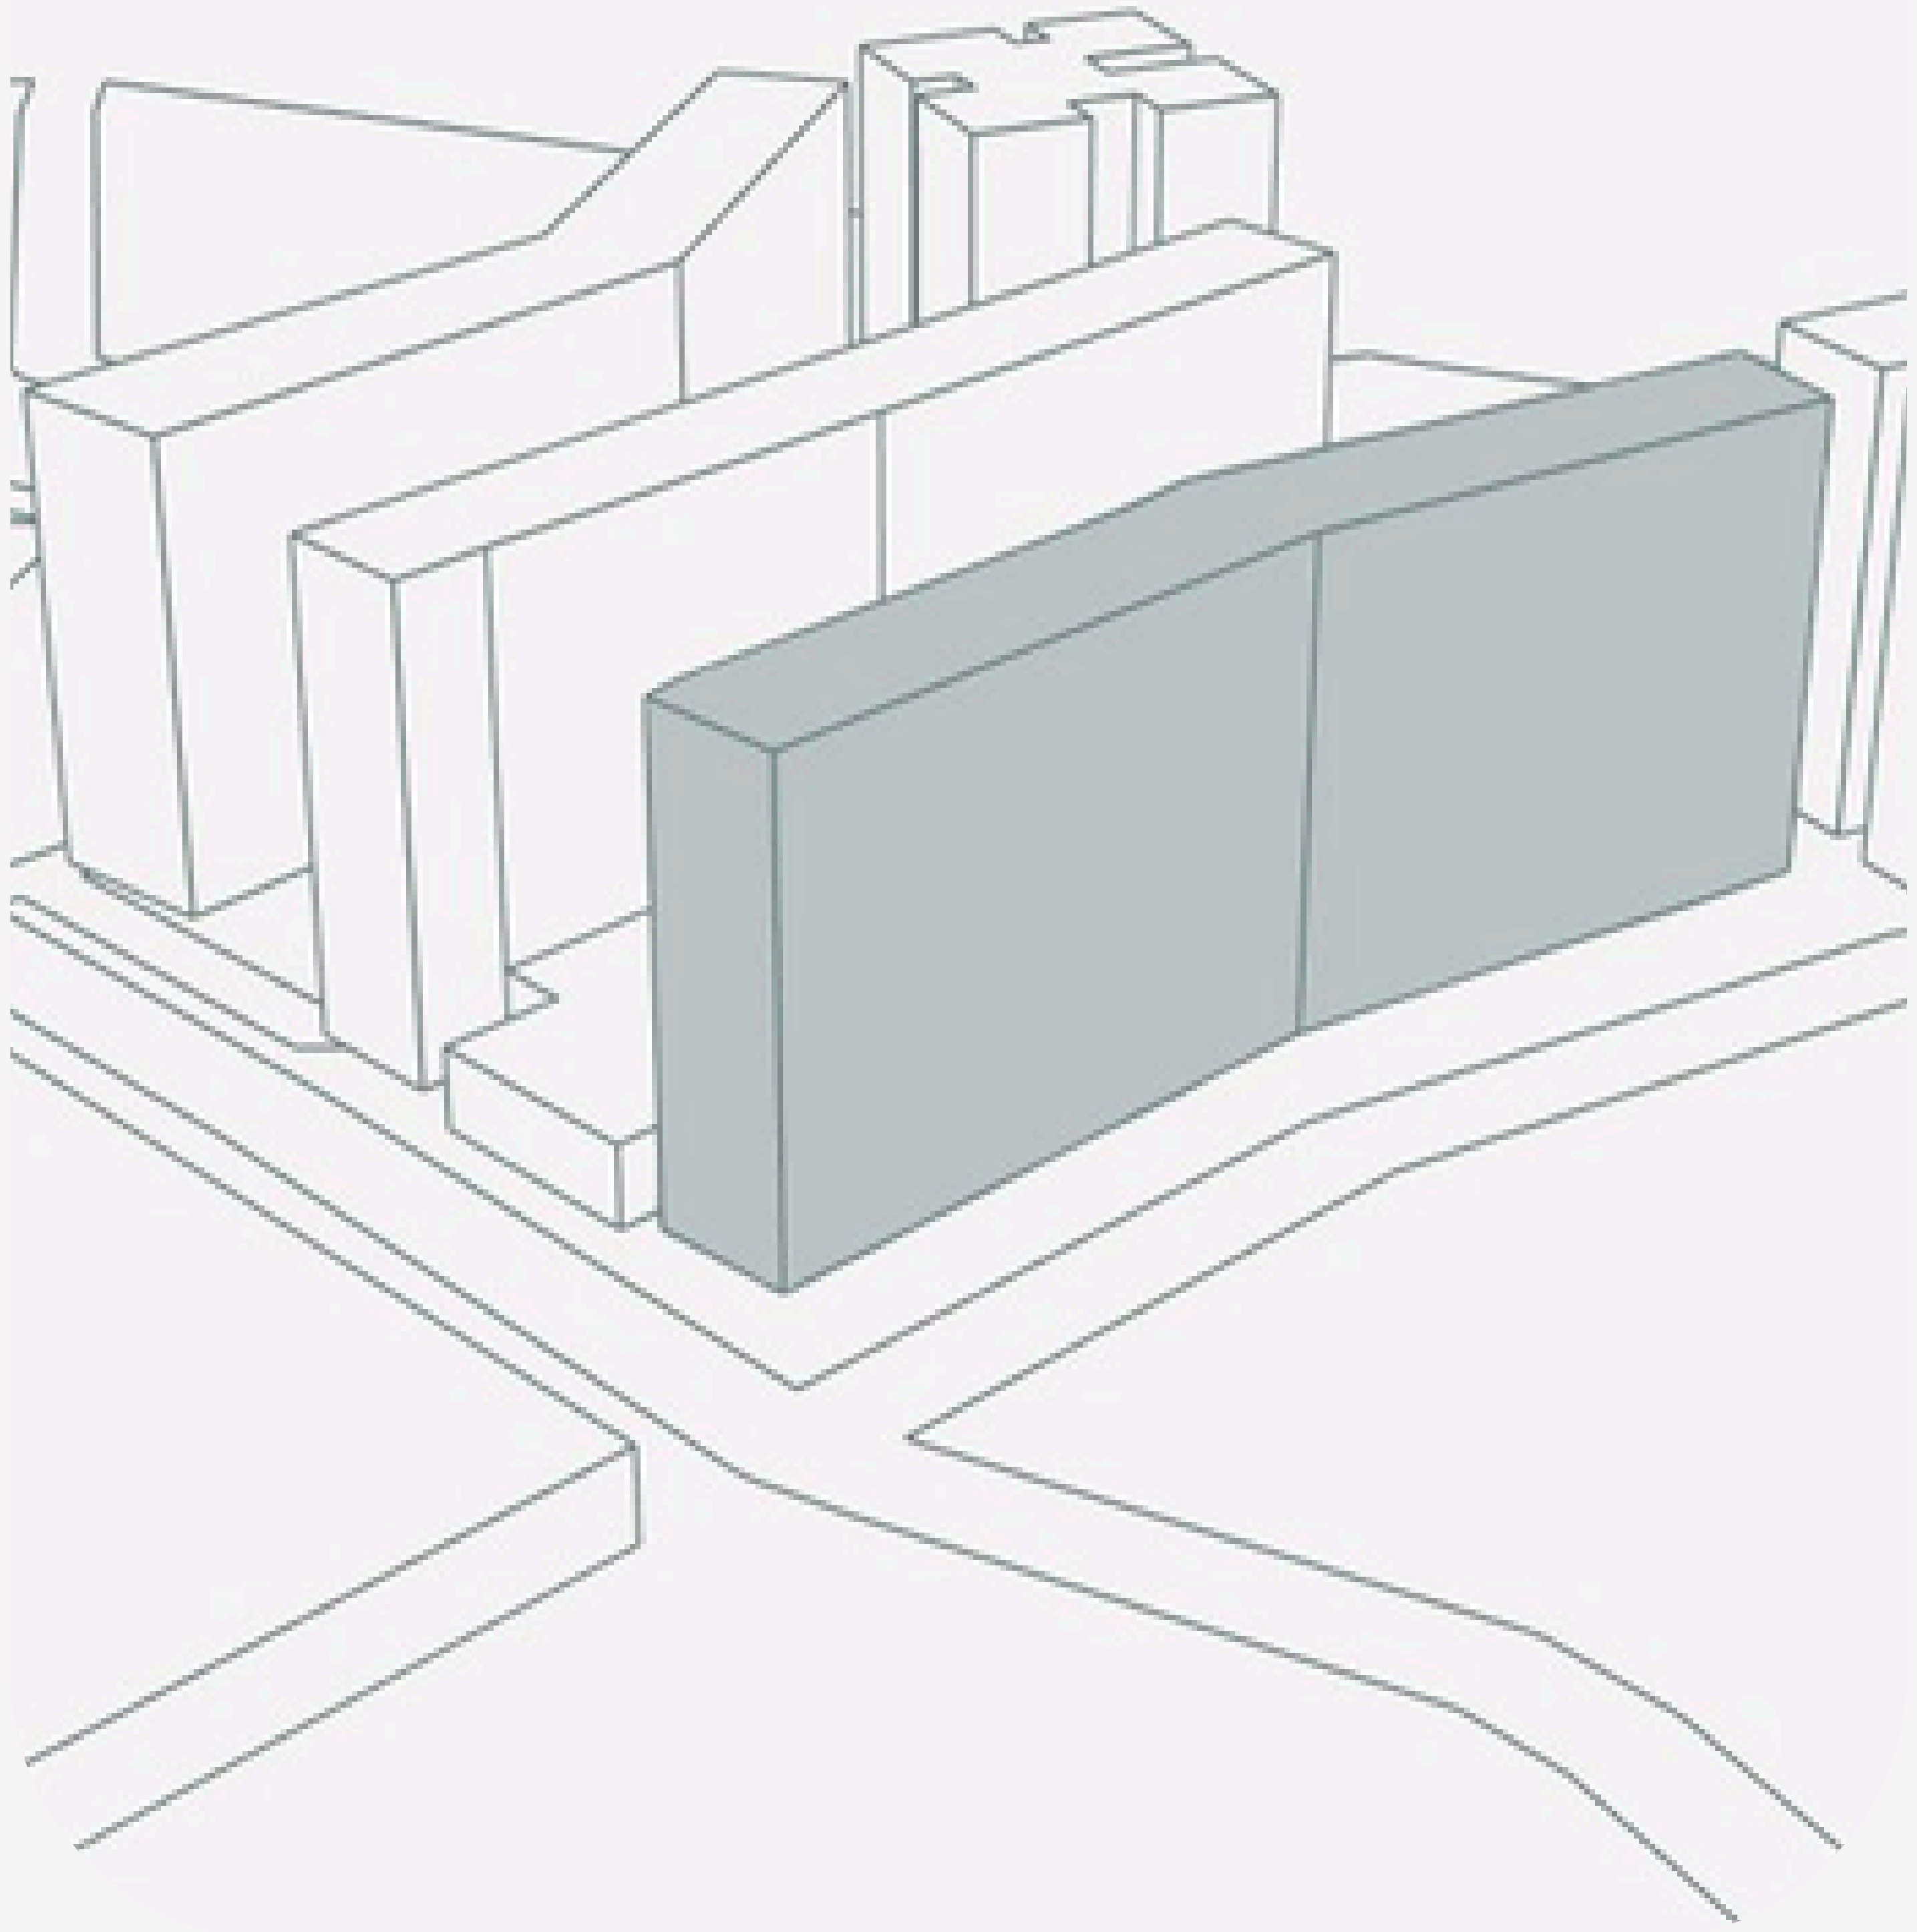

Footfall

From Main Campus to Hostel

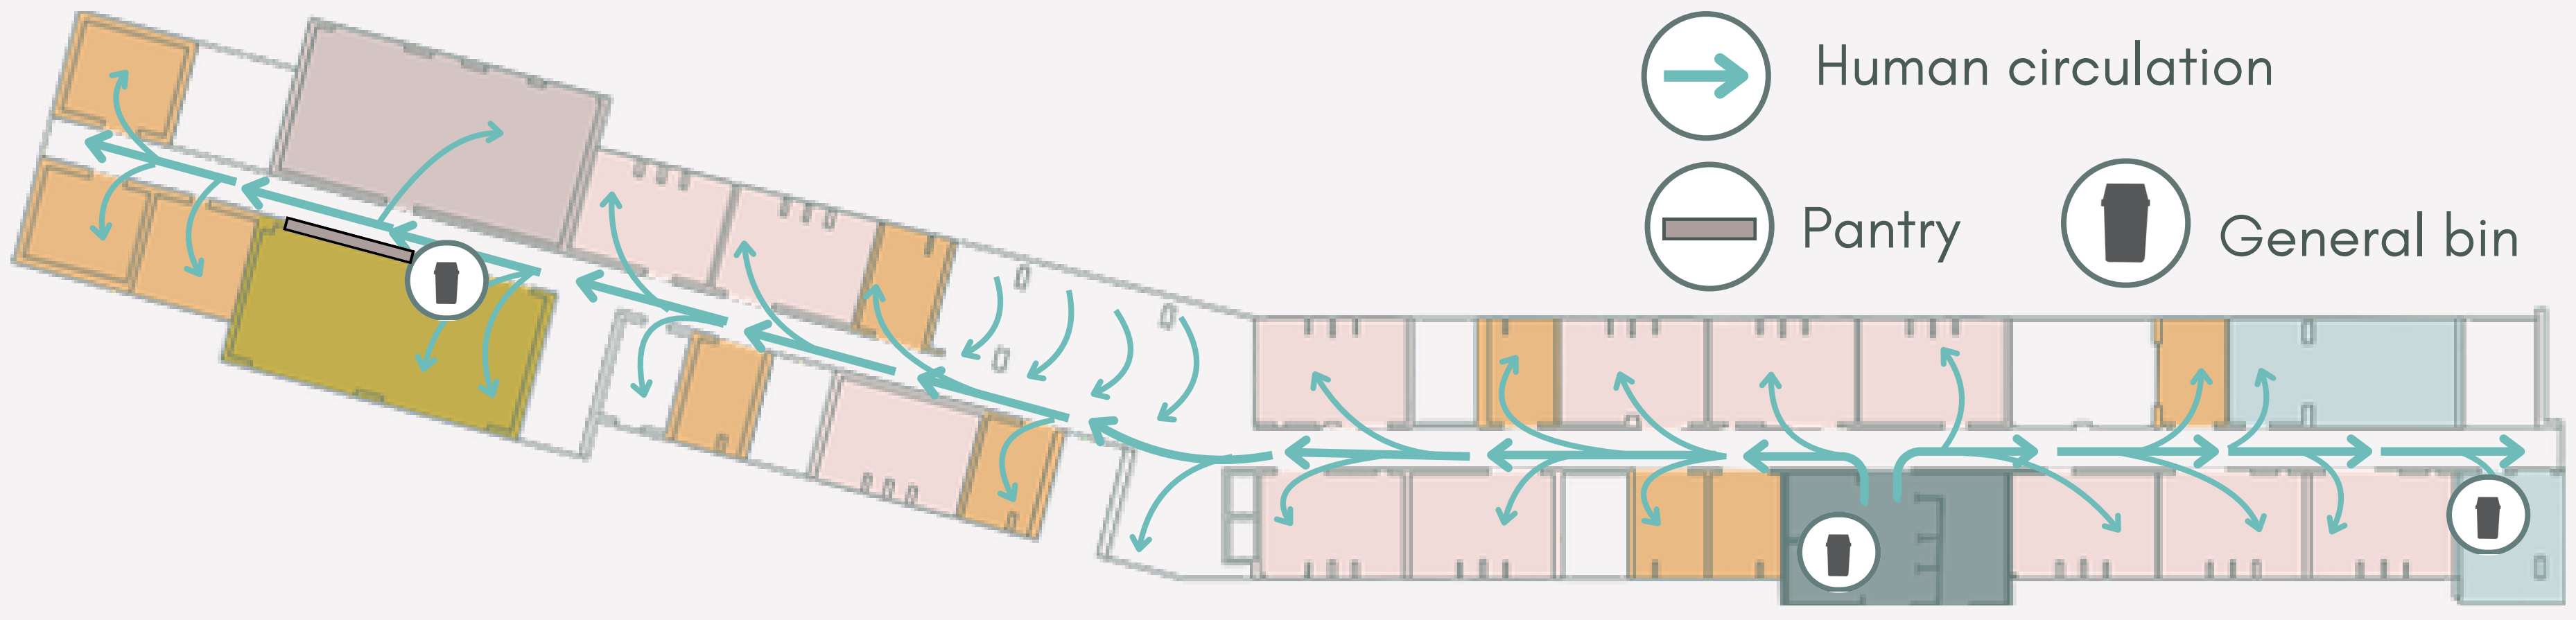

Inside the Hostel

Trash Analysis

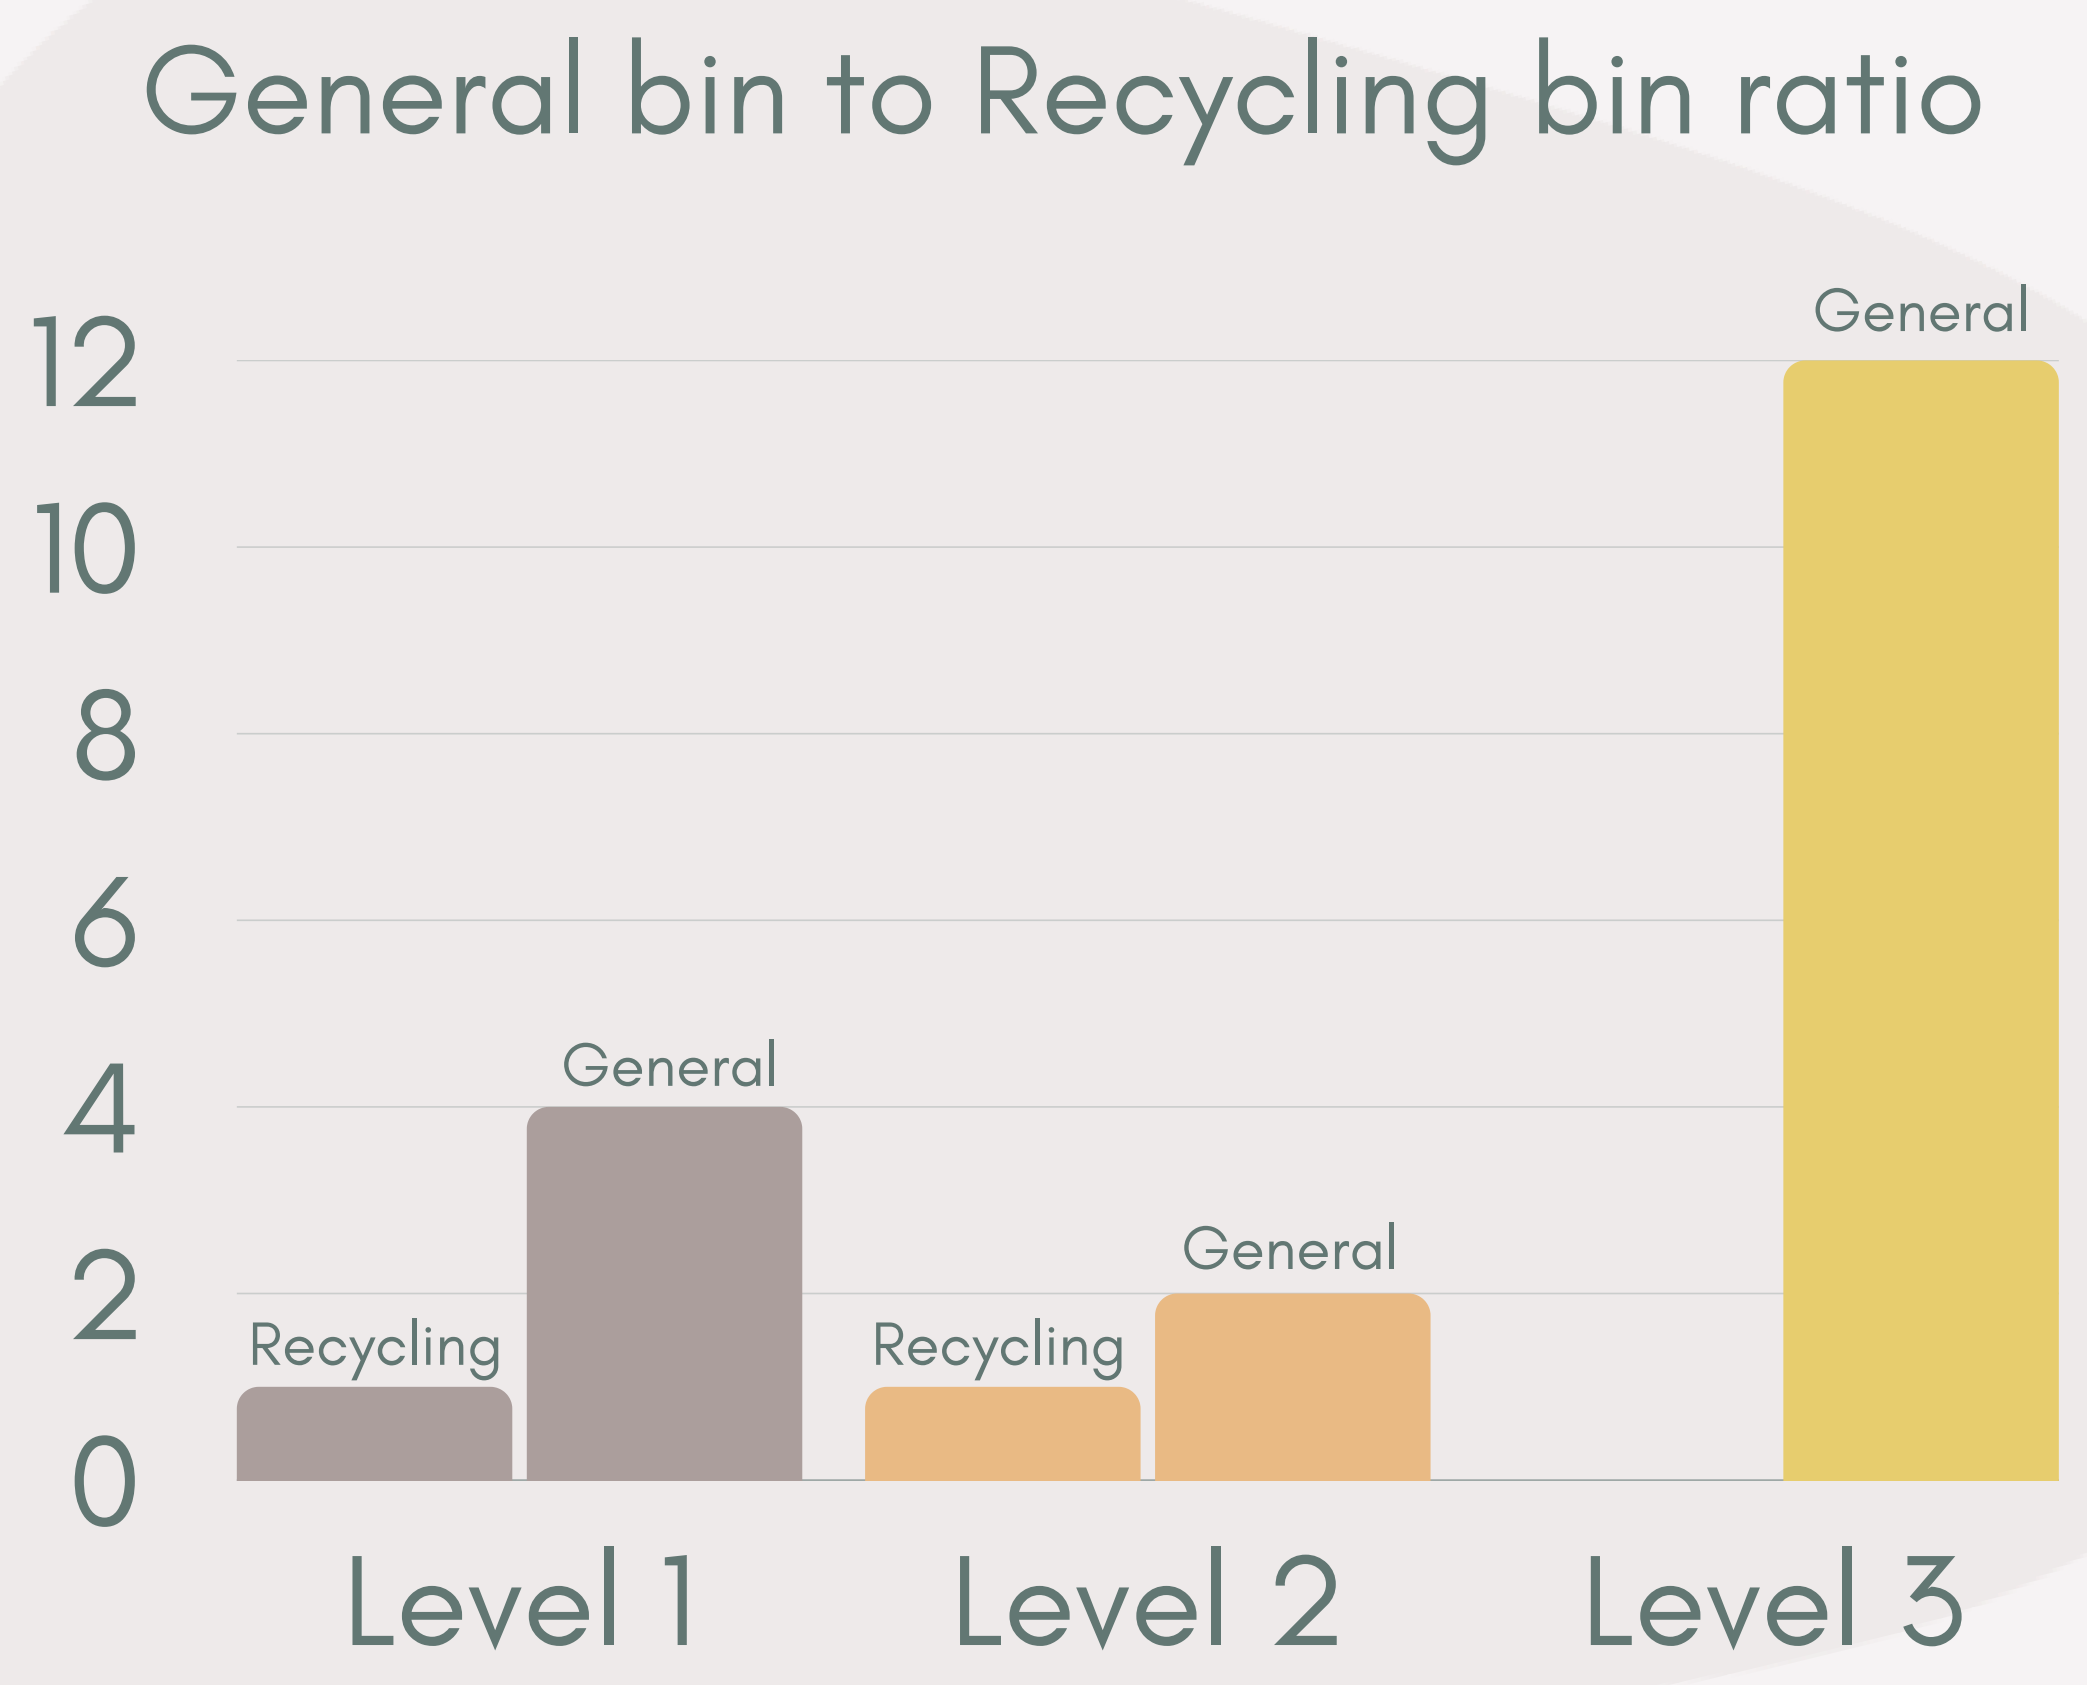

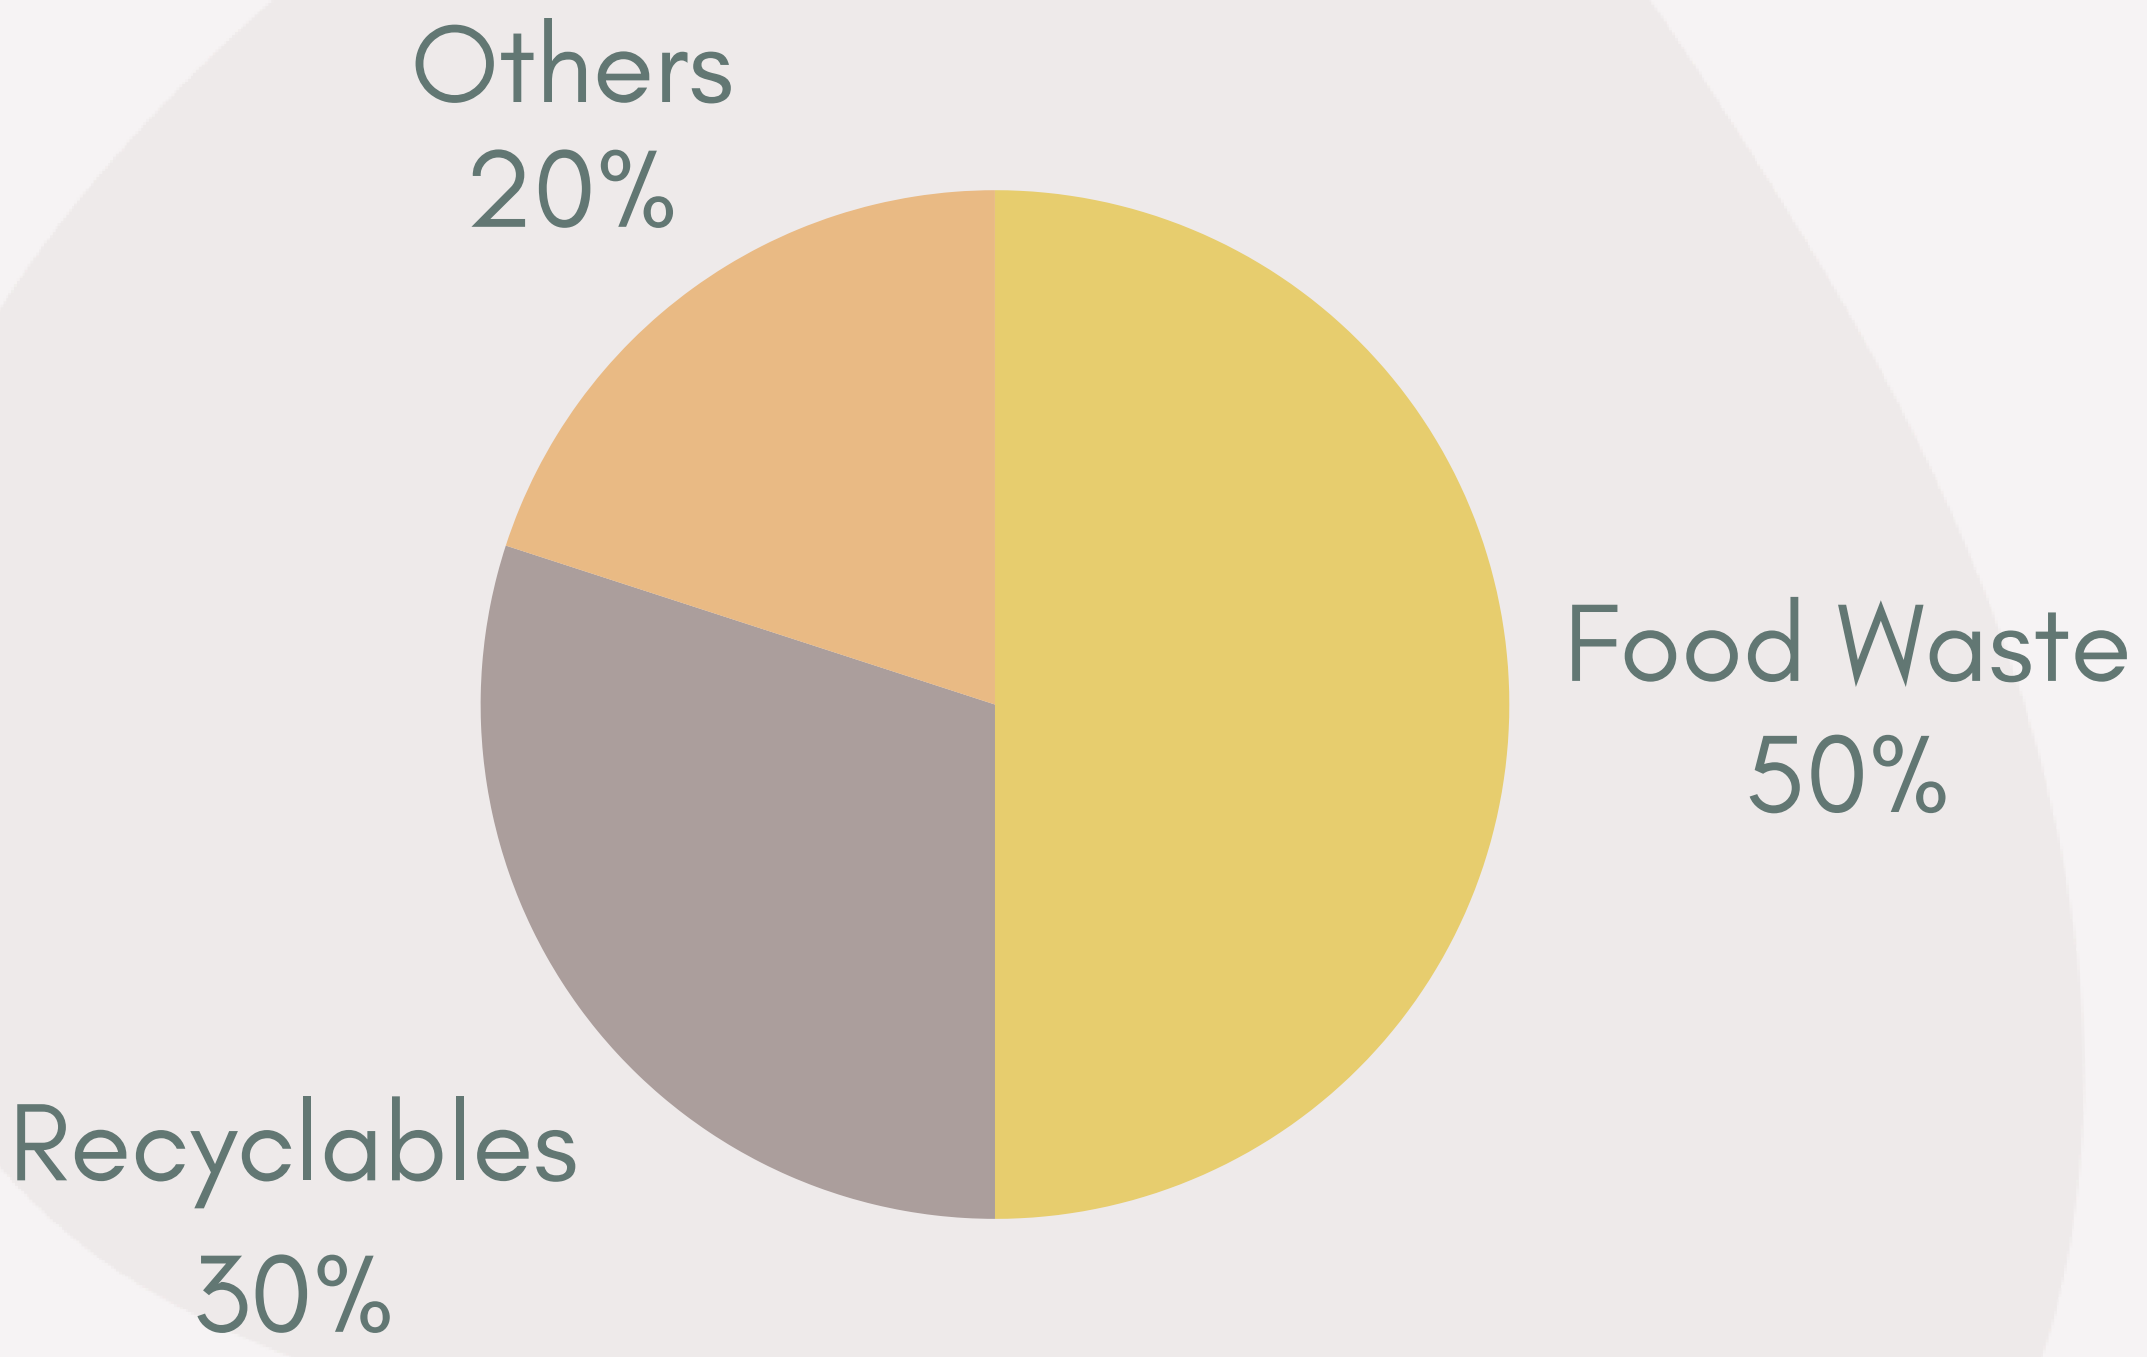

Waste Generated in Hostel

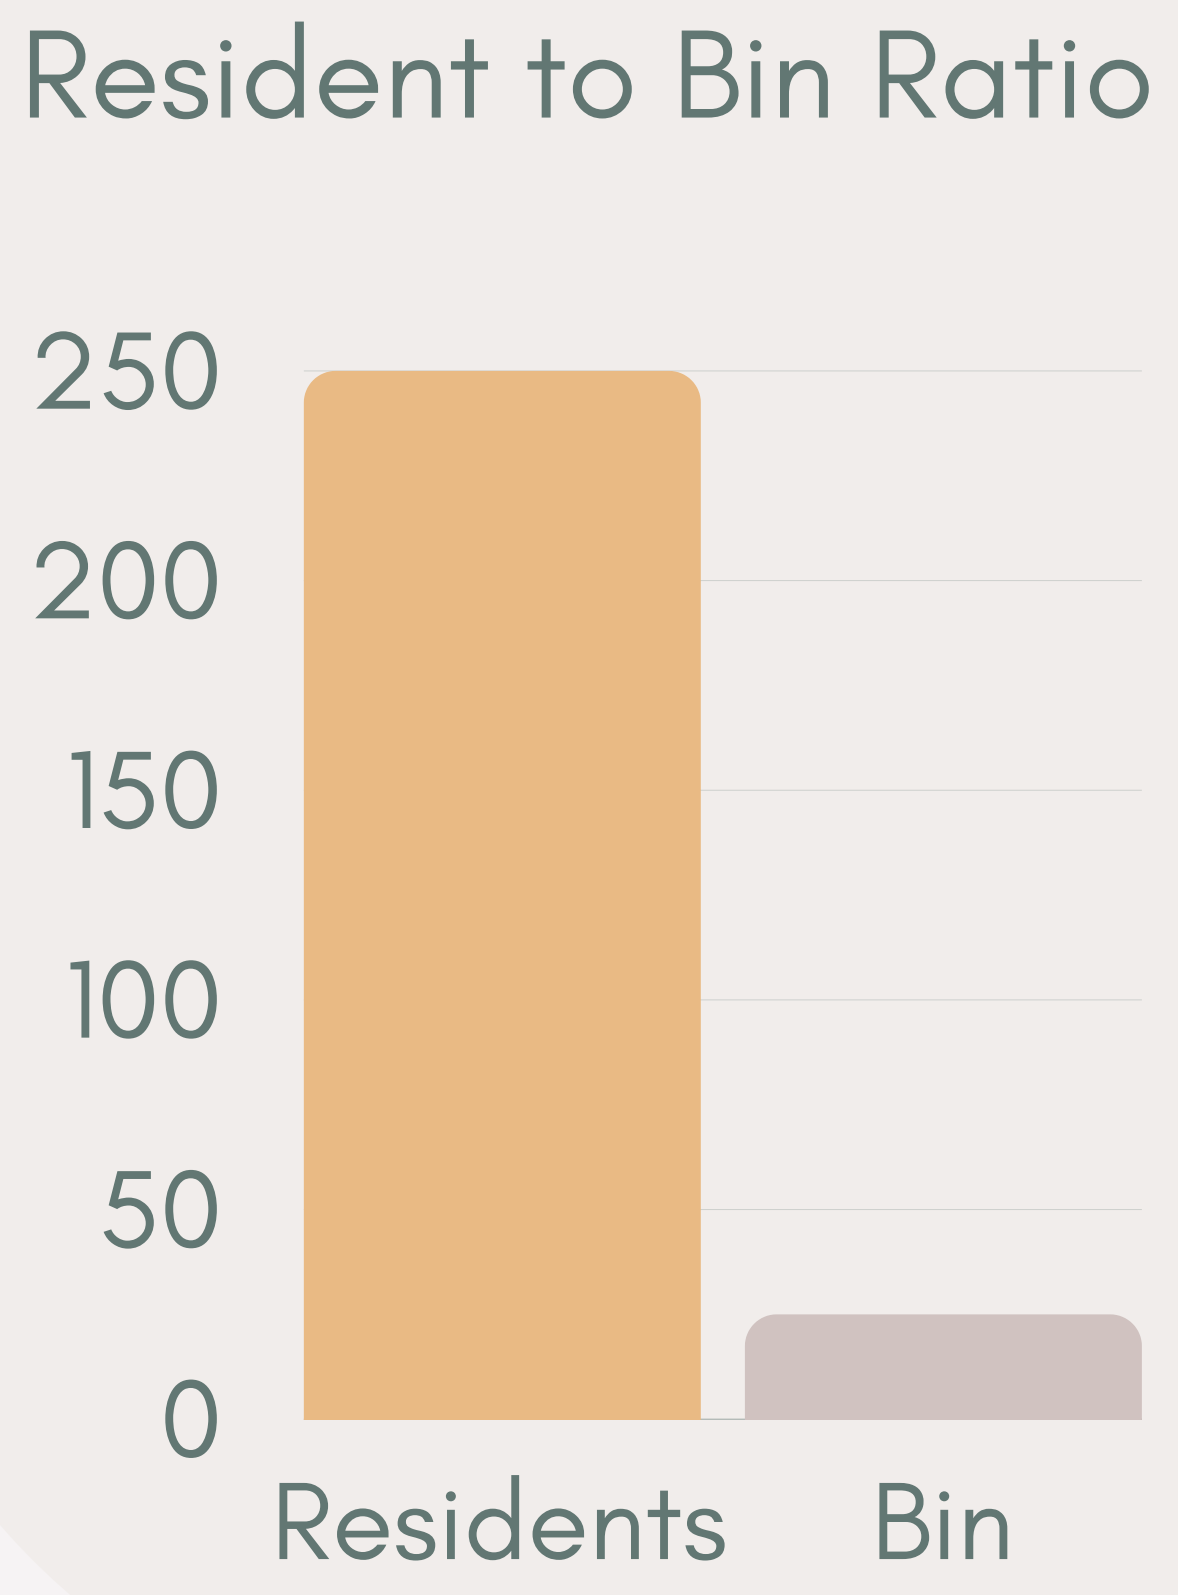

Environmental Analysis

Sun and Wind Analysis

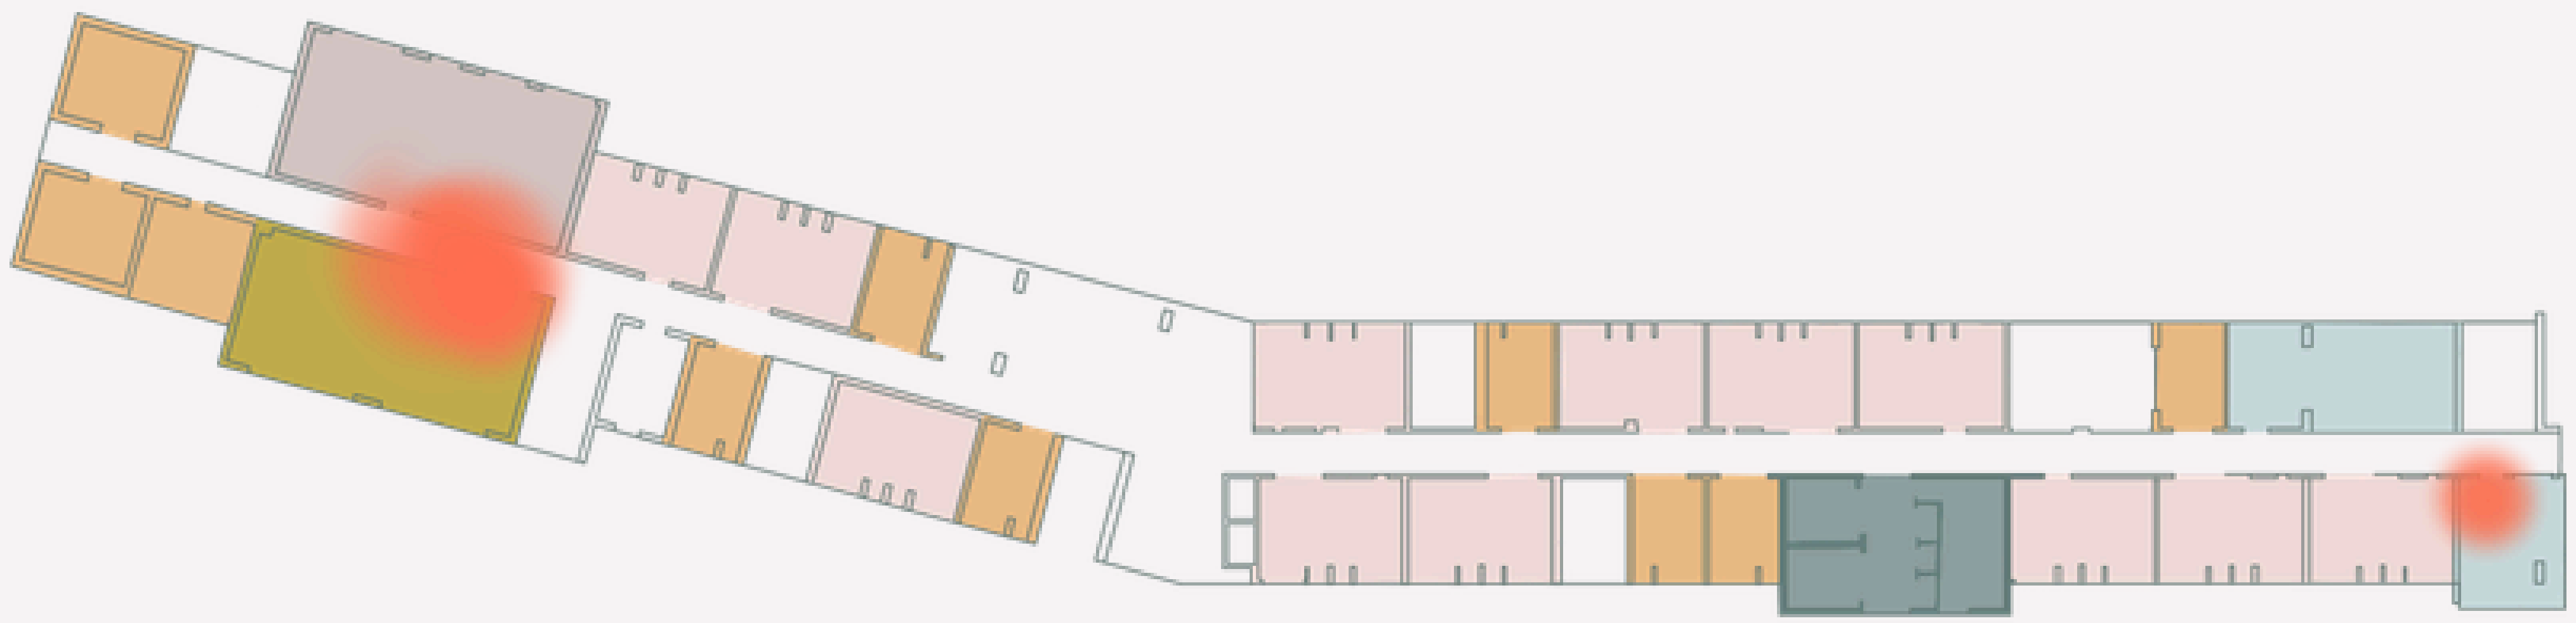

Odor Analysis

Design Goals

Engagement

Interactive and playful user experience

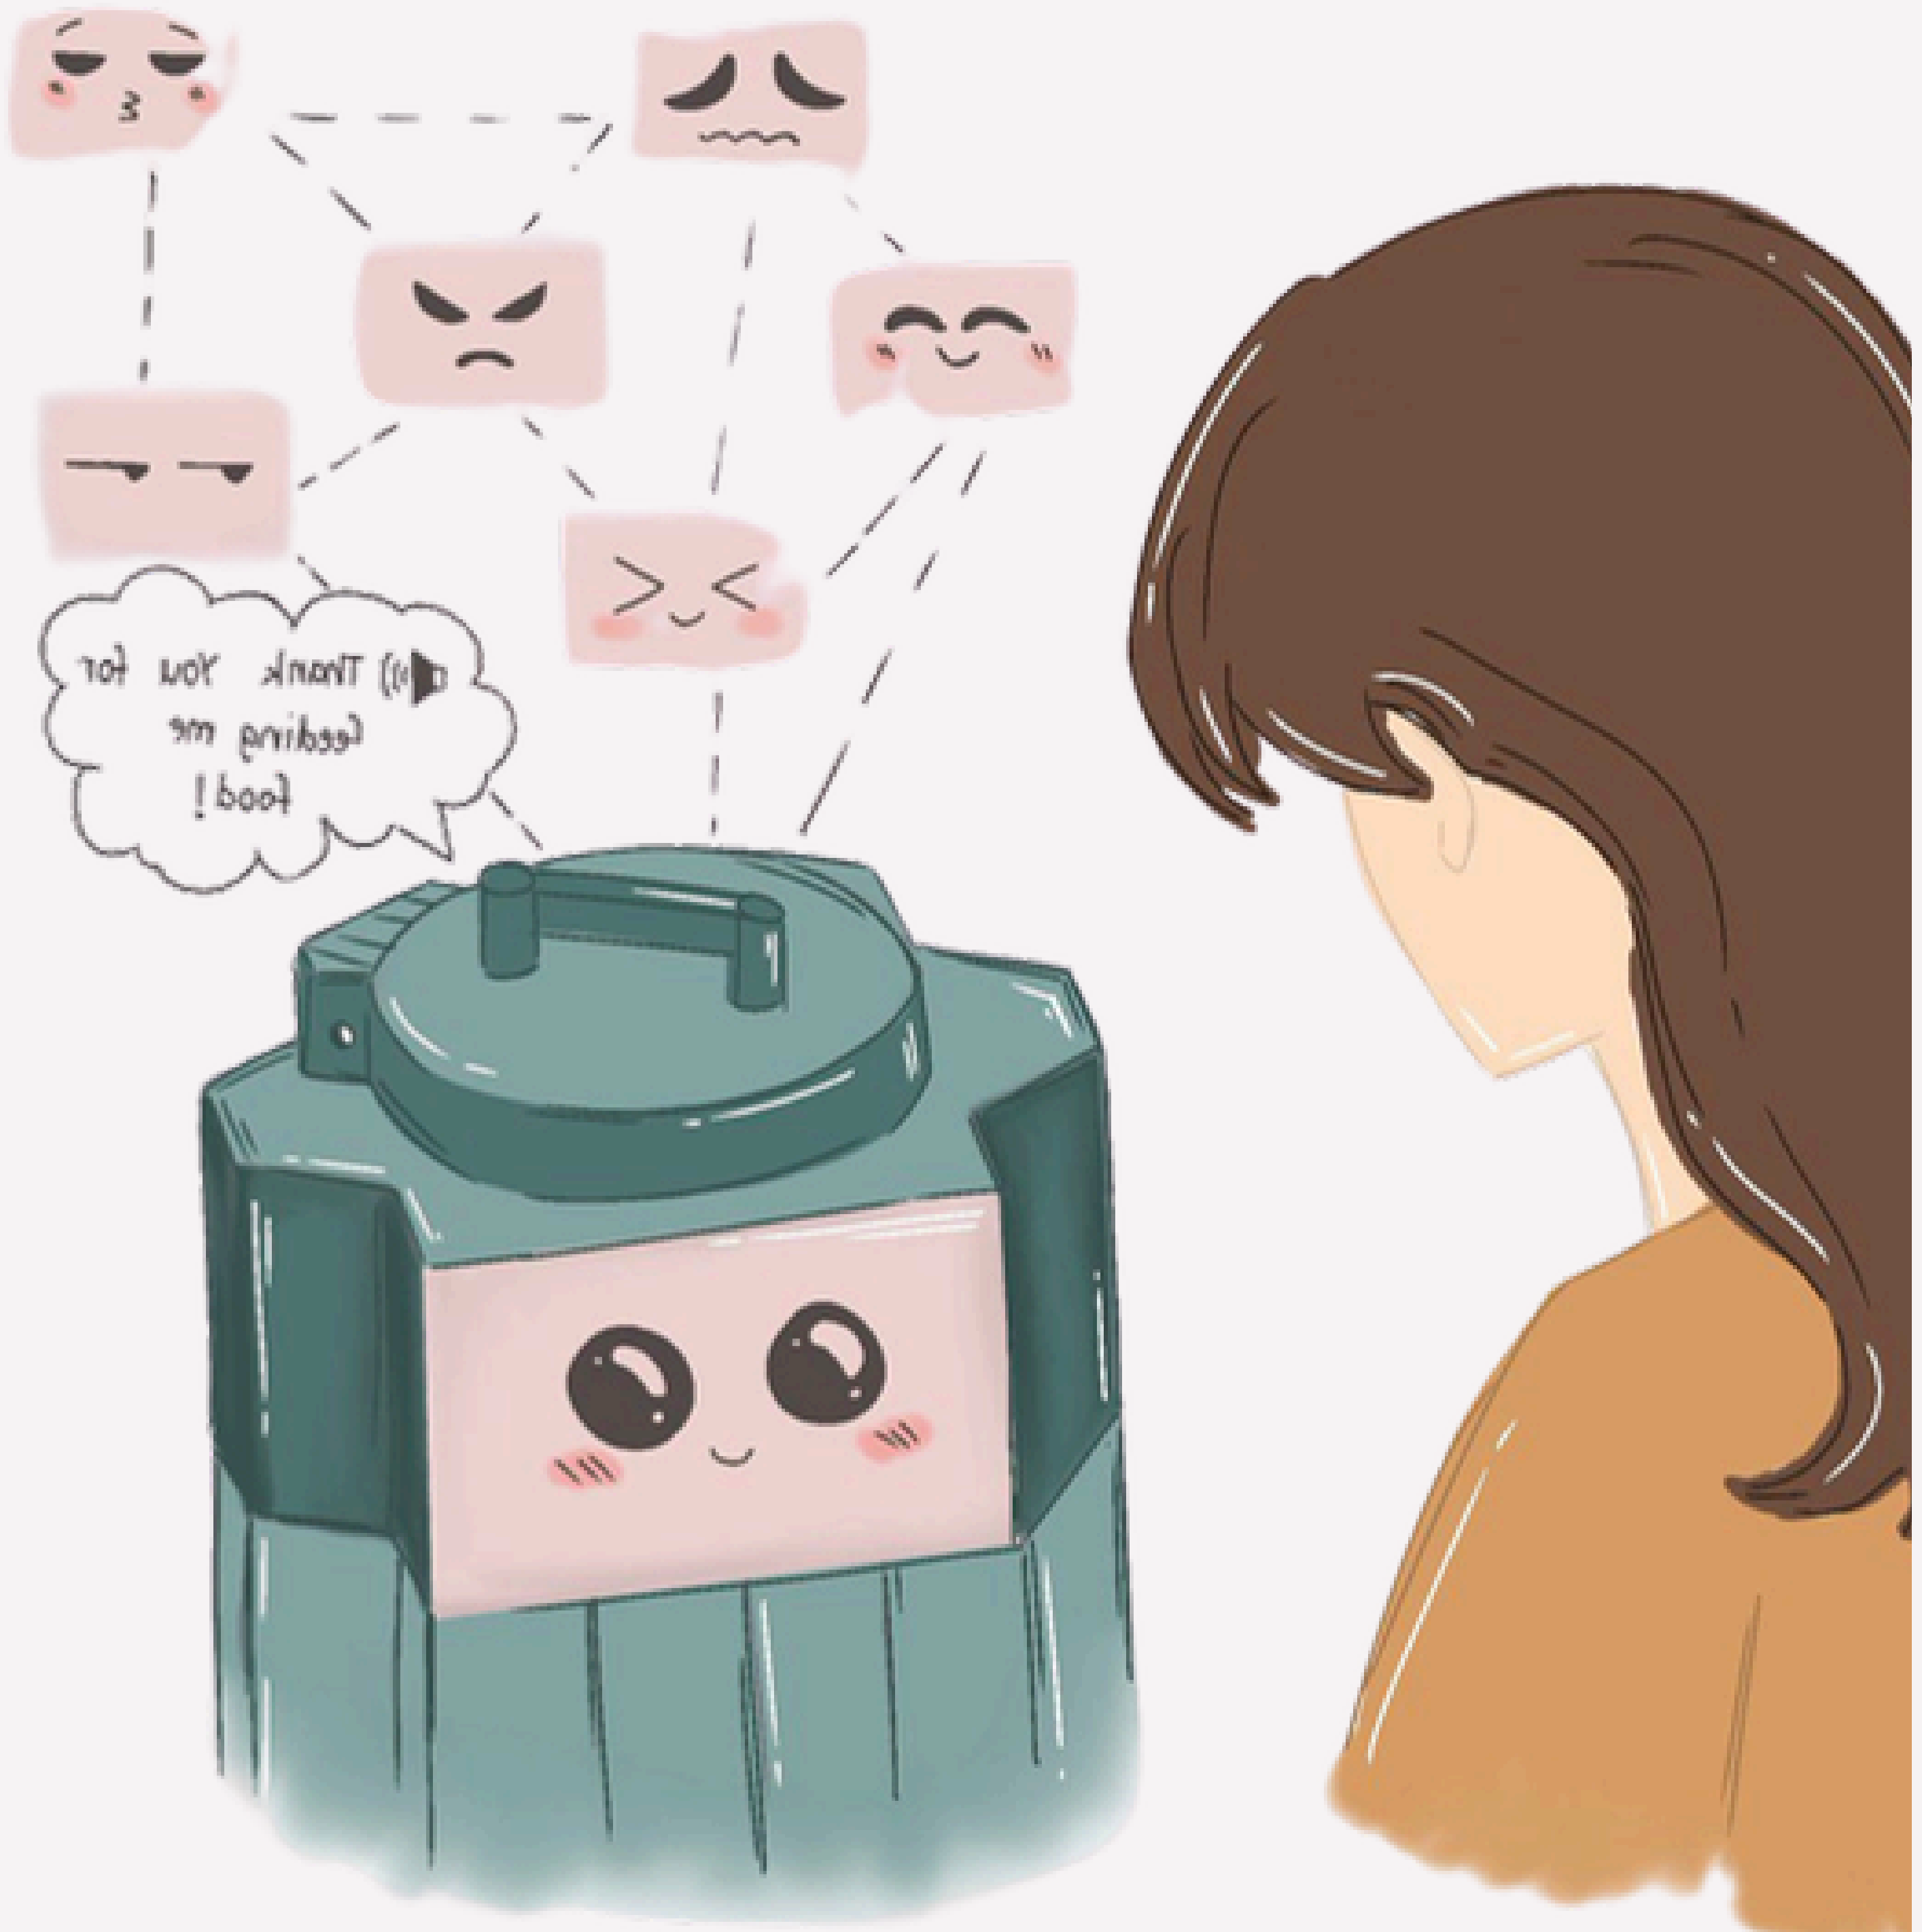

Mechanism

Automated sorting for easy management

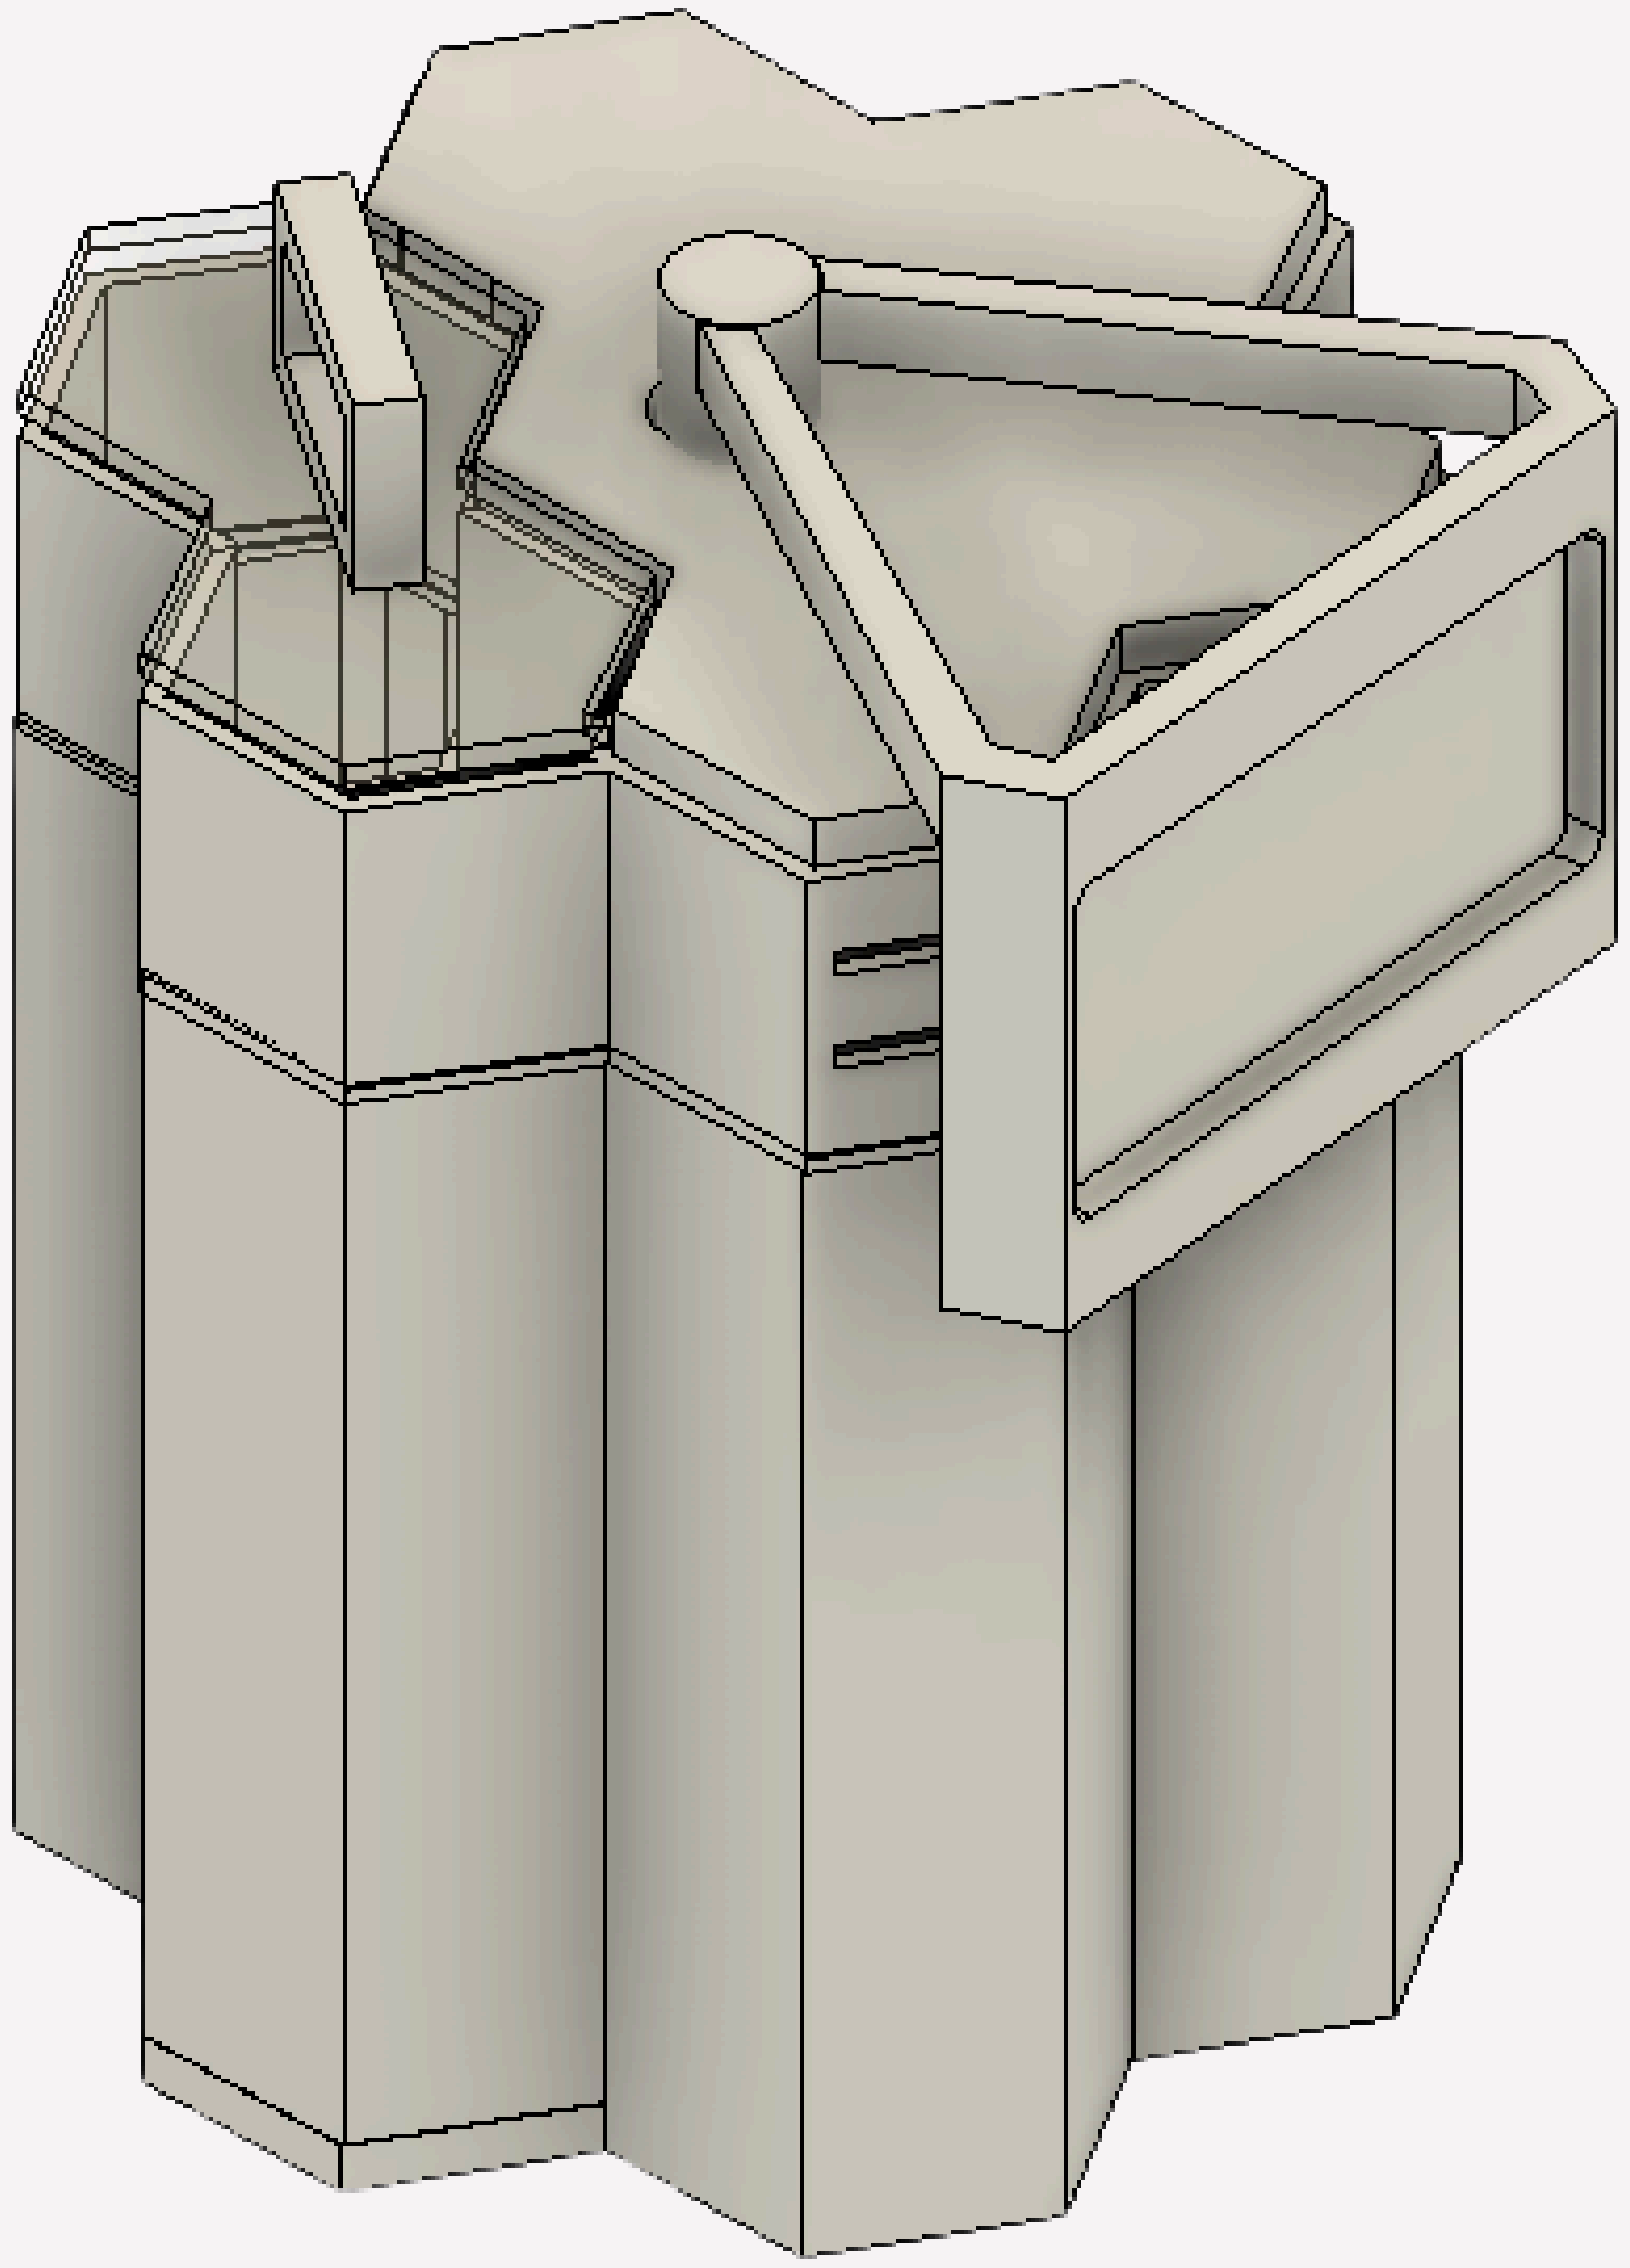

User Comfort

Odor control and pleasant usage experience

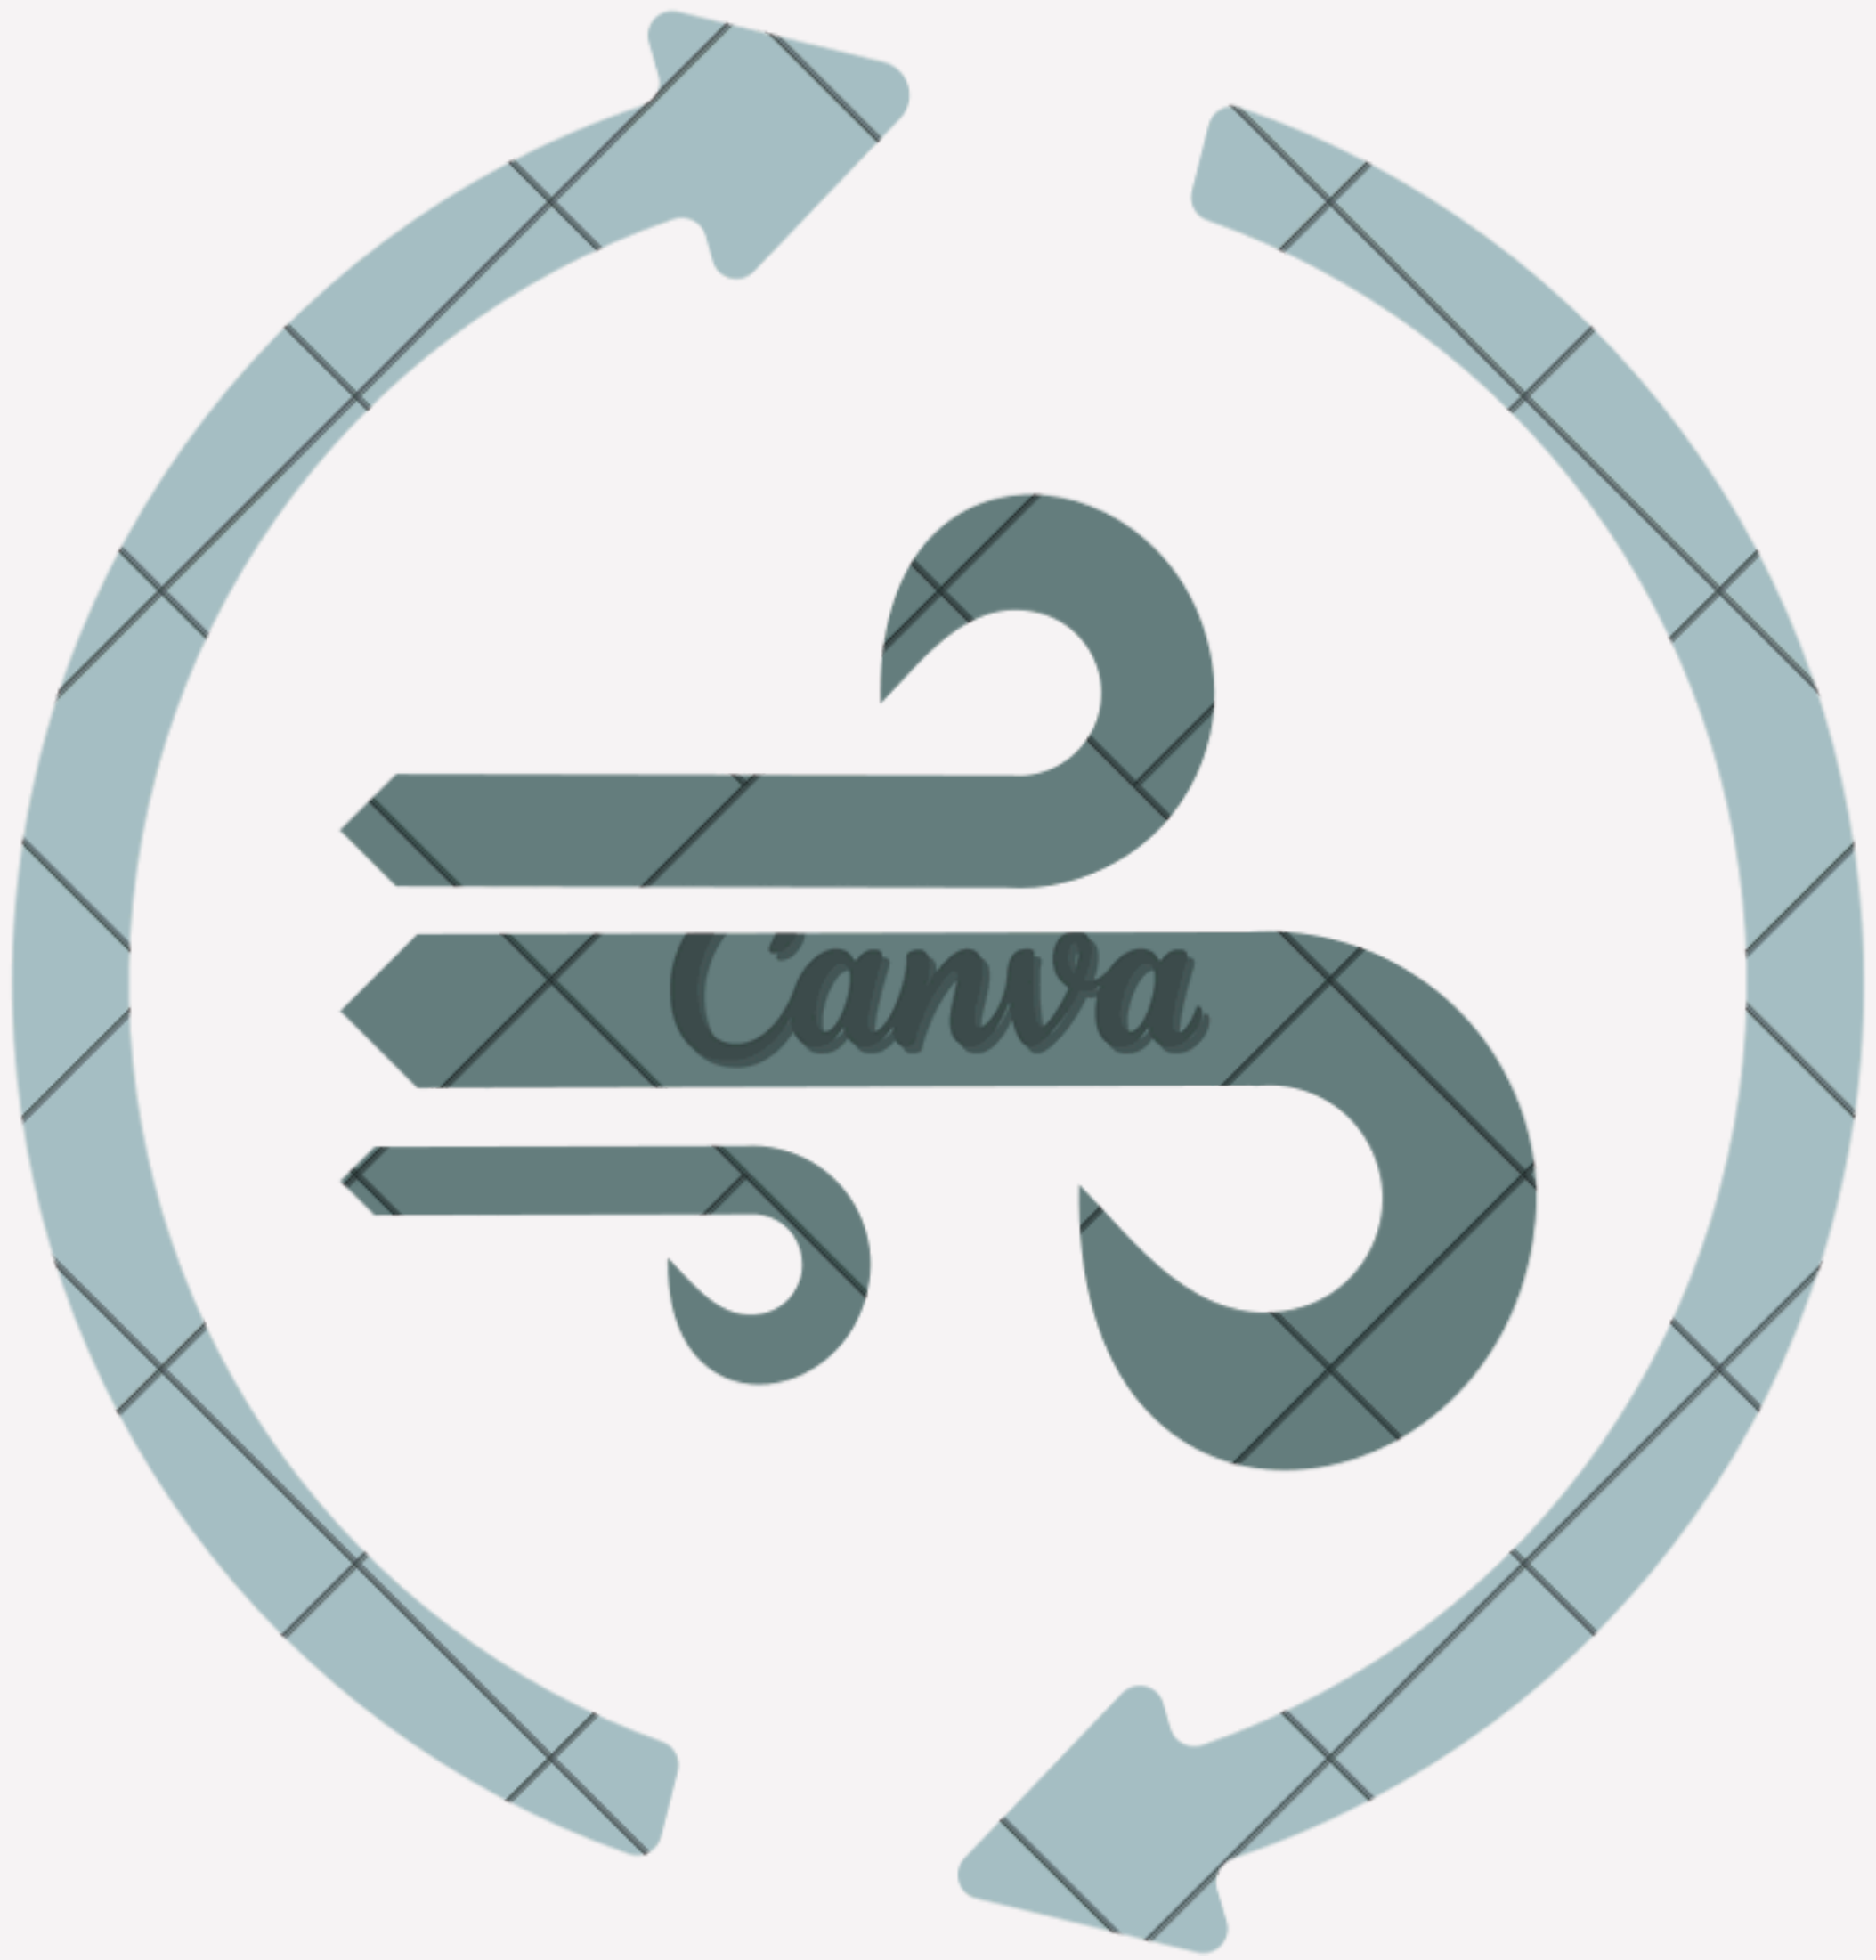

Design Precedence

Emo Bot

Smart sensors and expressive feedback for engaging, interactive waste disposal.

Clarity

High-tech sensor-based system for fast, accurate, and efficient material sorting.

Dry Wall

Durable, eco-friendly panels offering insulation, fire safety, and moisture resistance.

Key Features

Interactive Display System

Sorting Mechanism

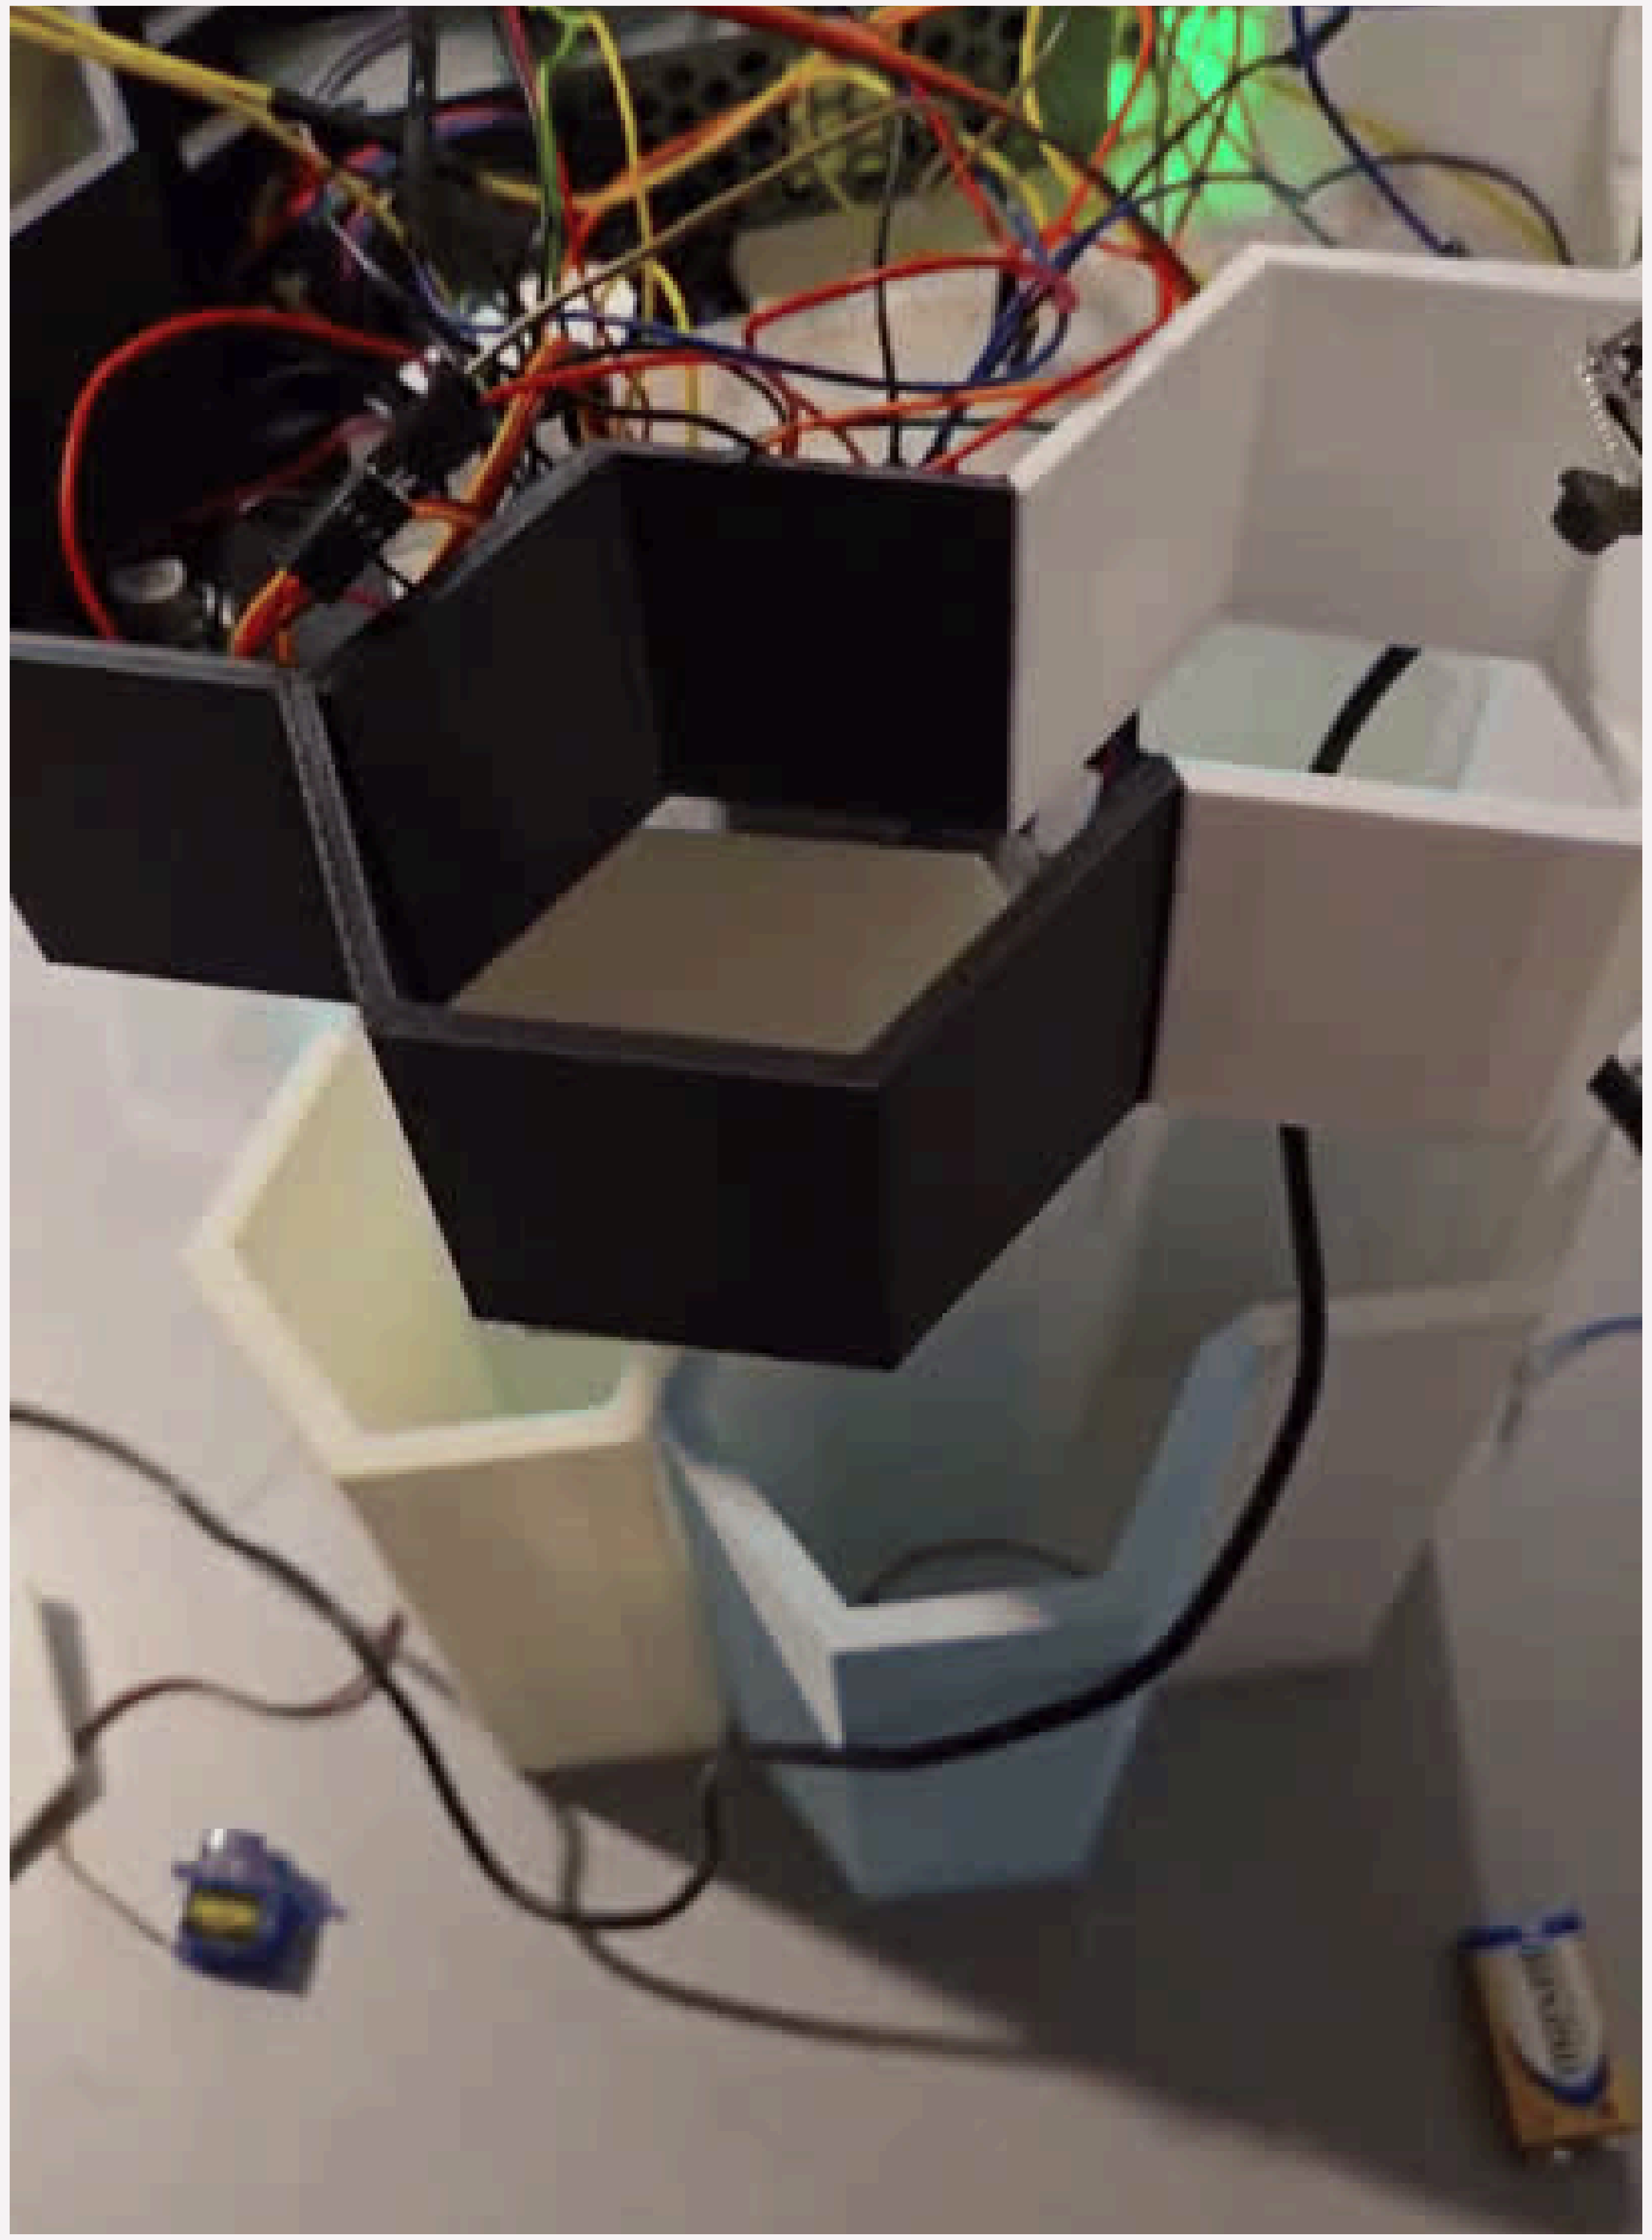

Fill Level Sensors

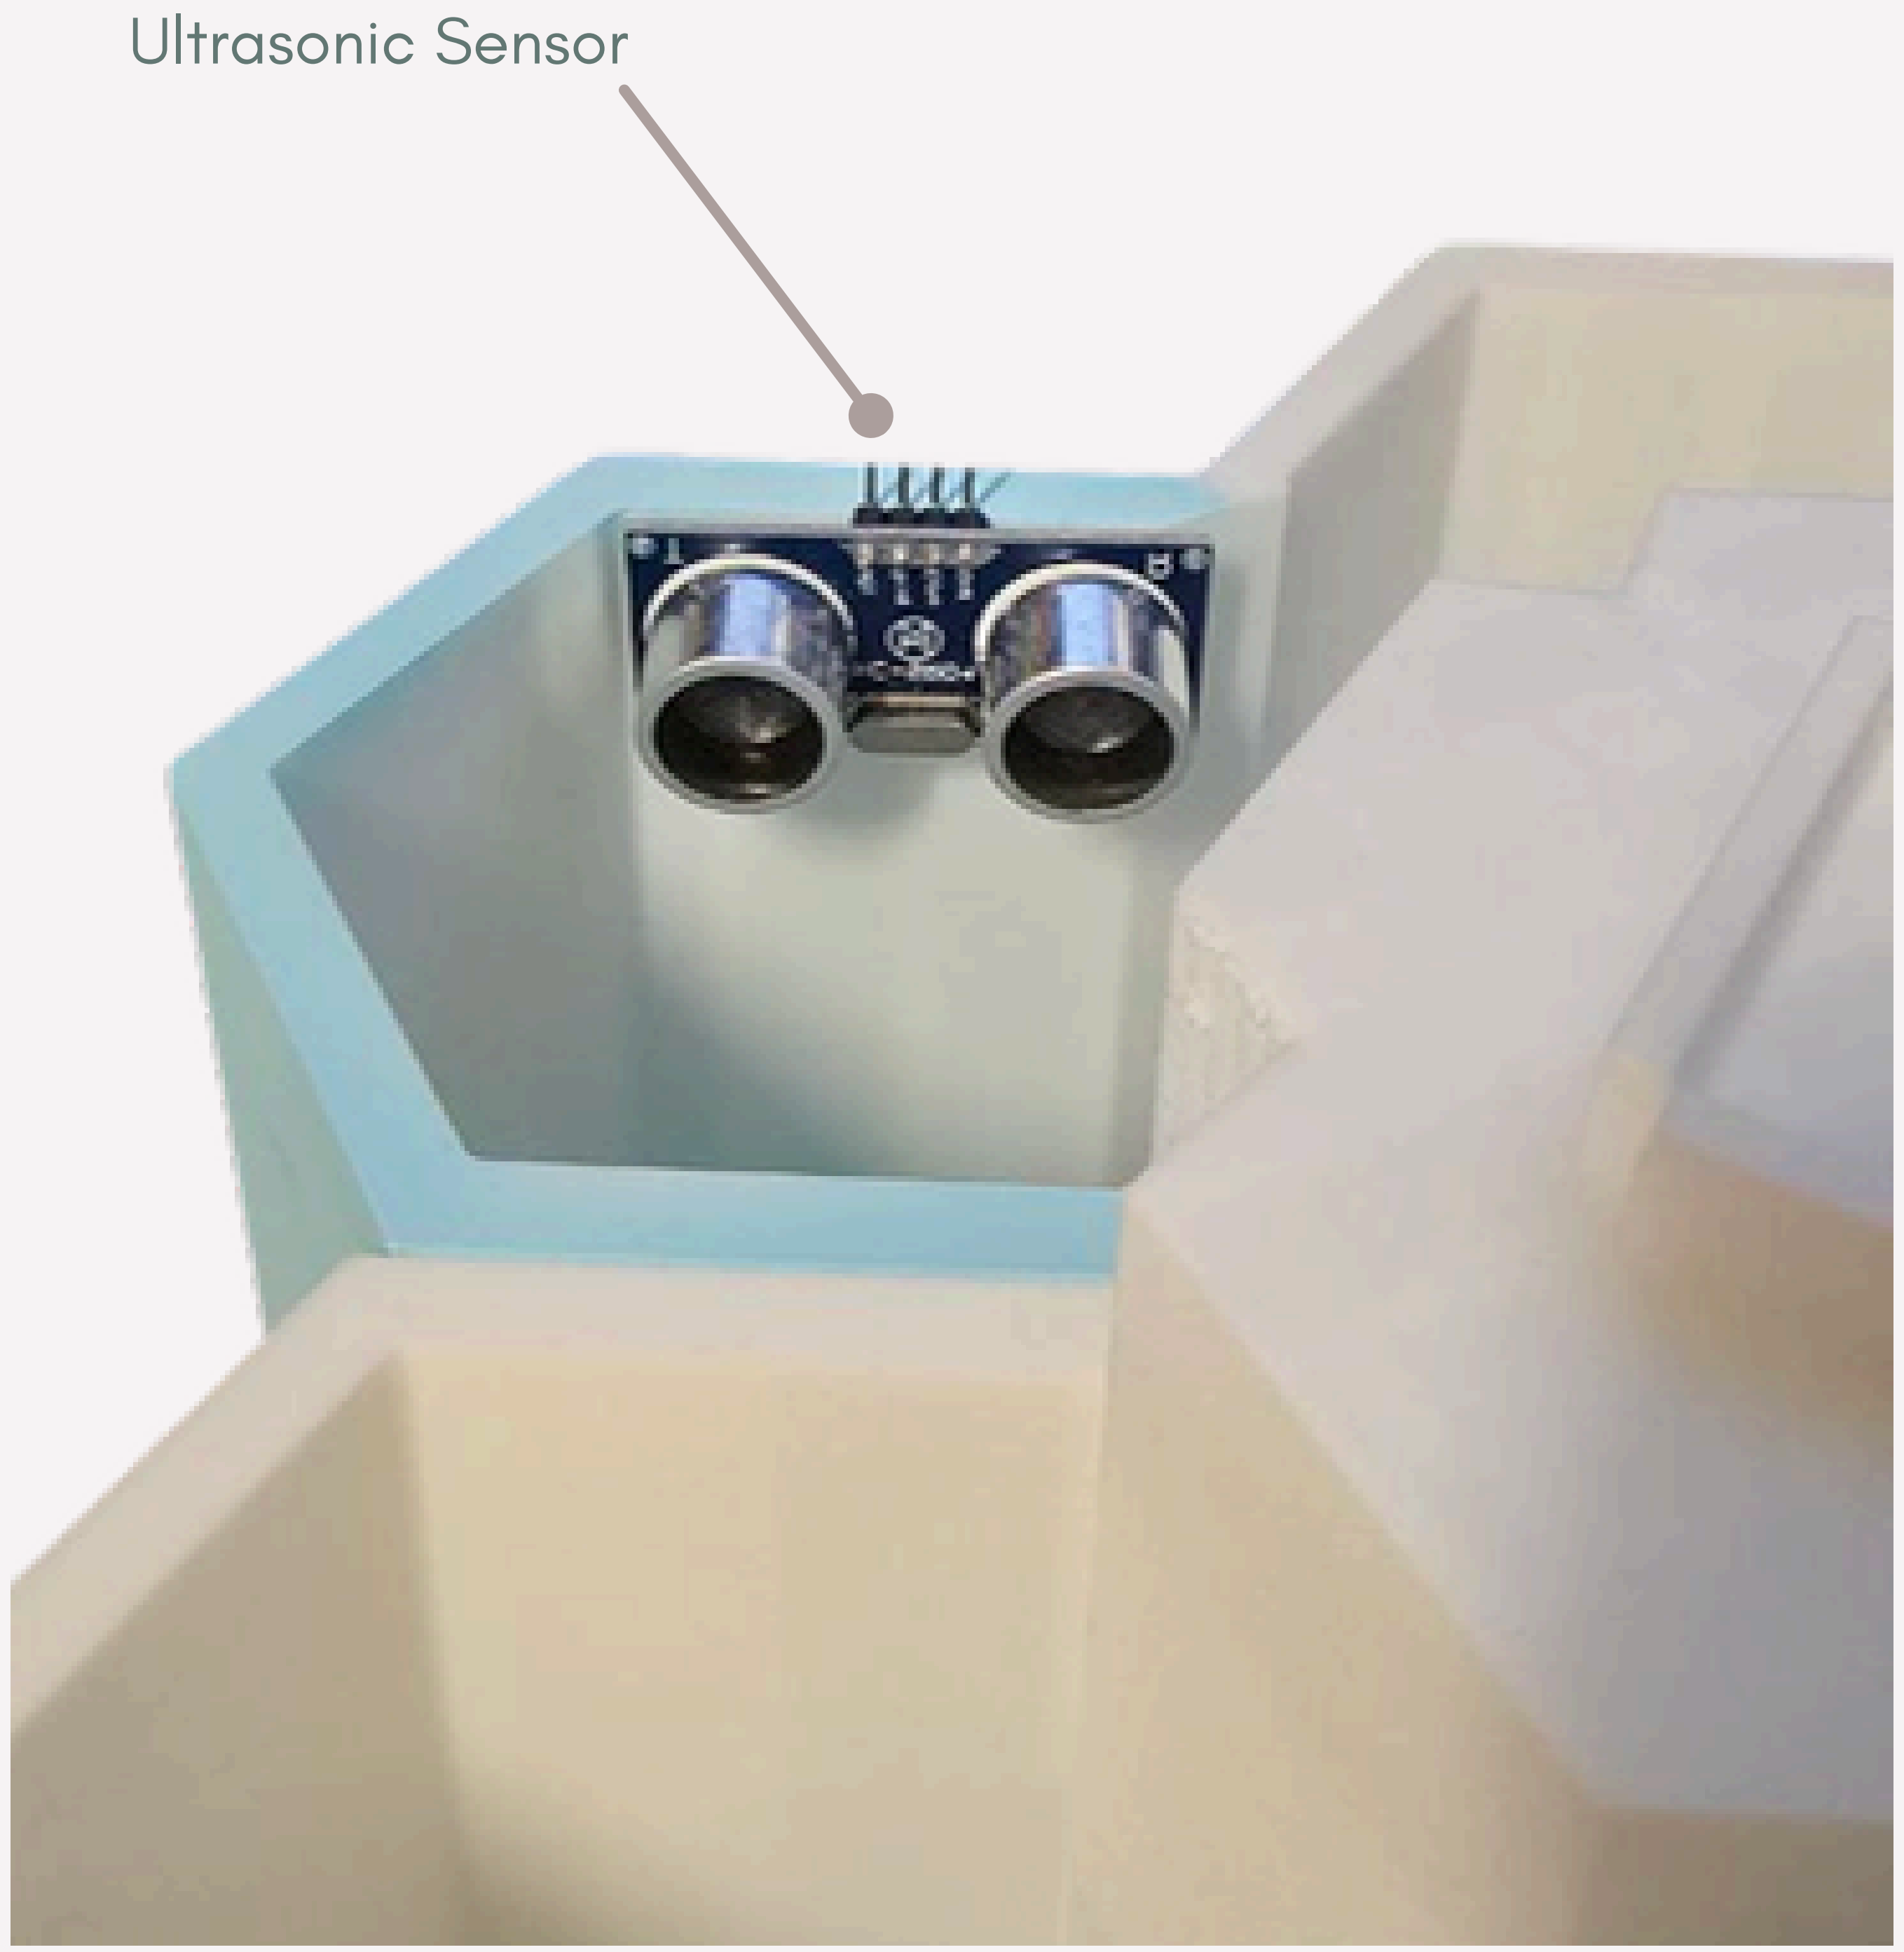

Centralized App

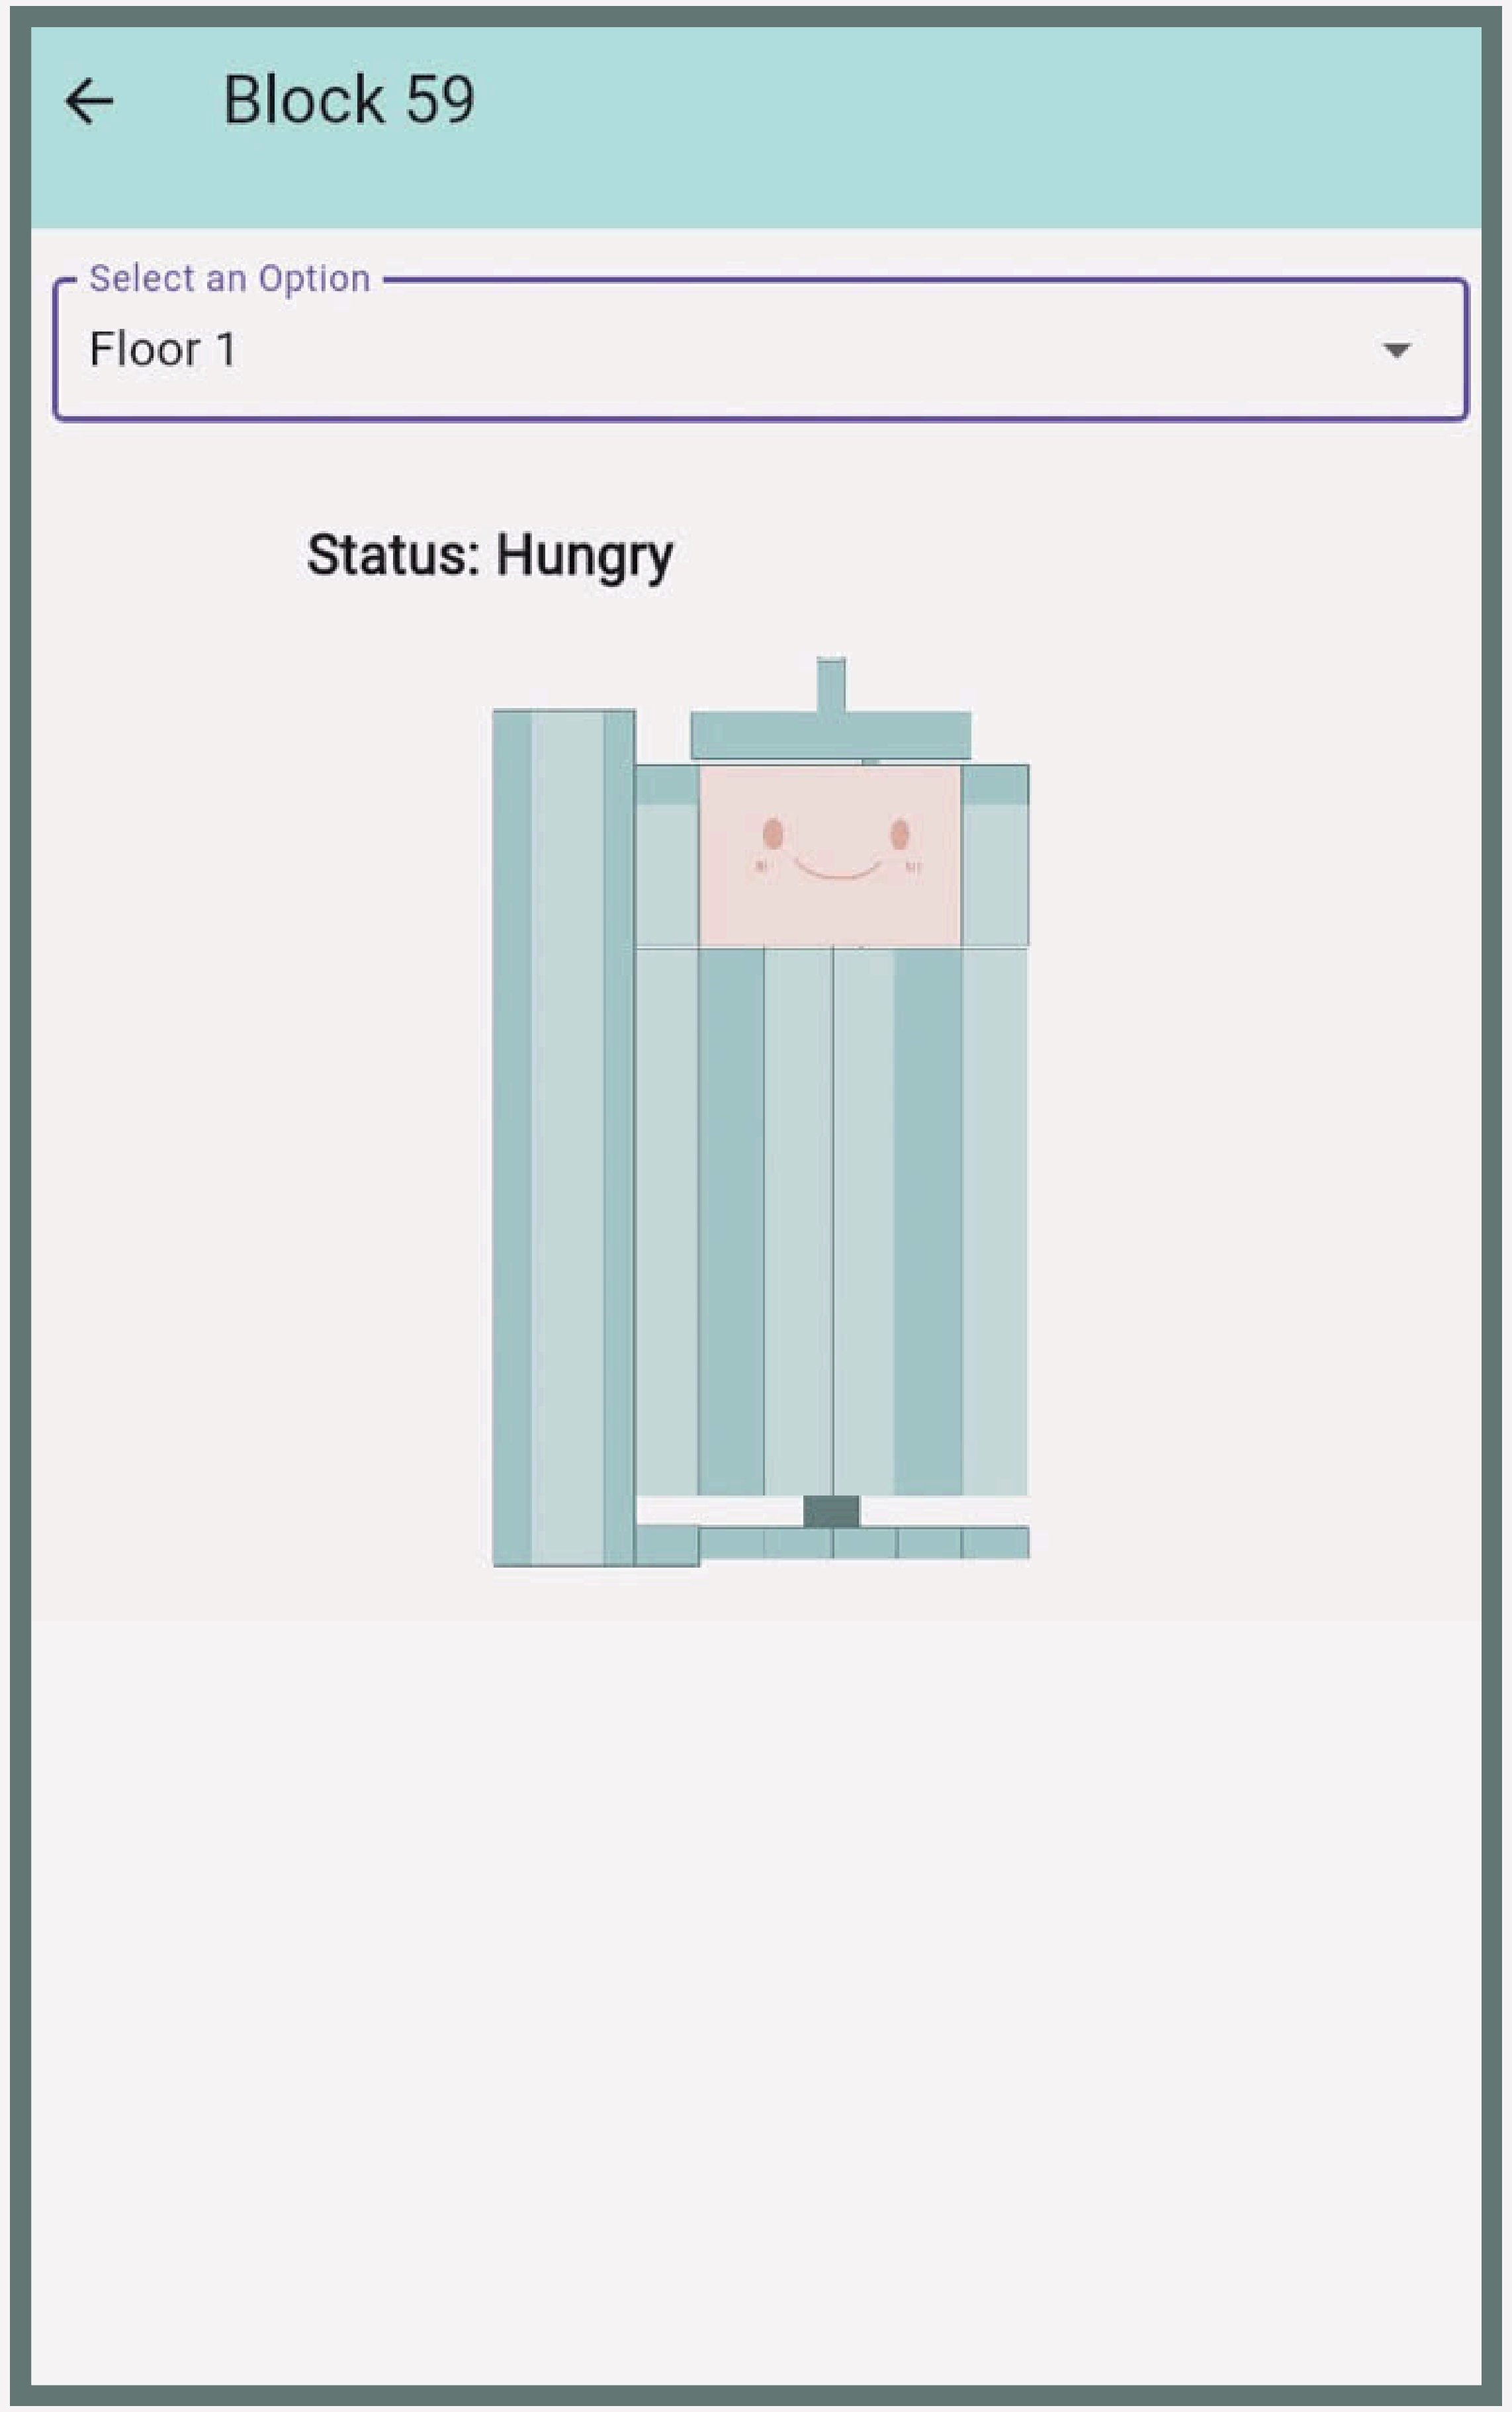

Detachable Sides

Separate Wet & Dry Compartments

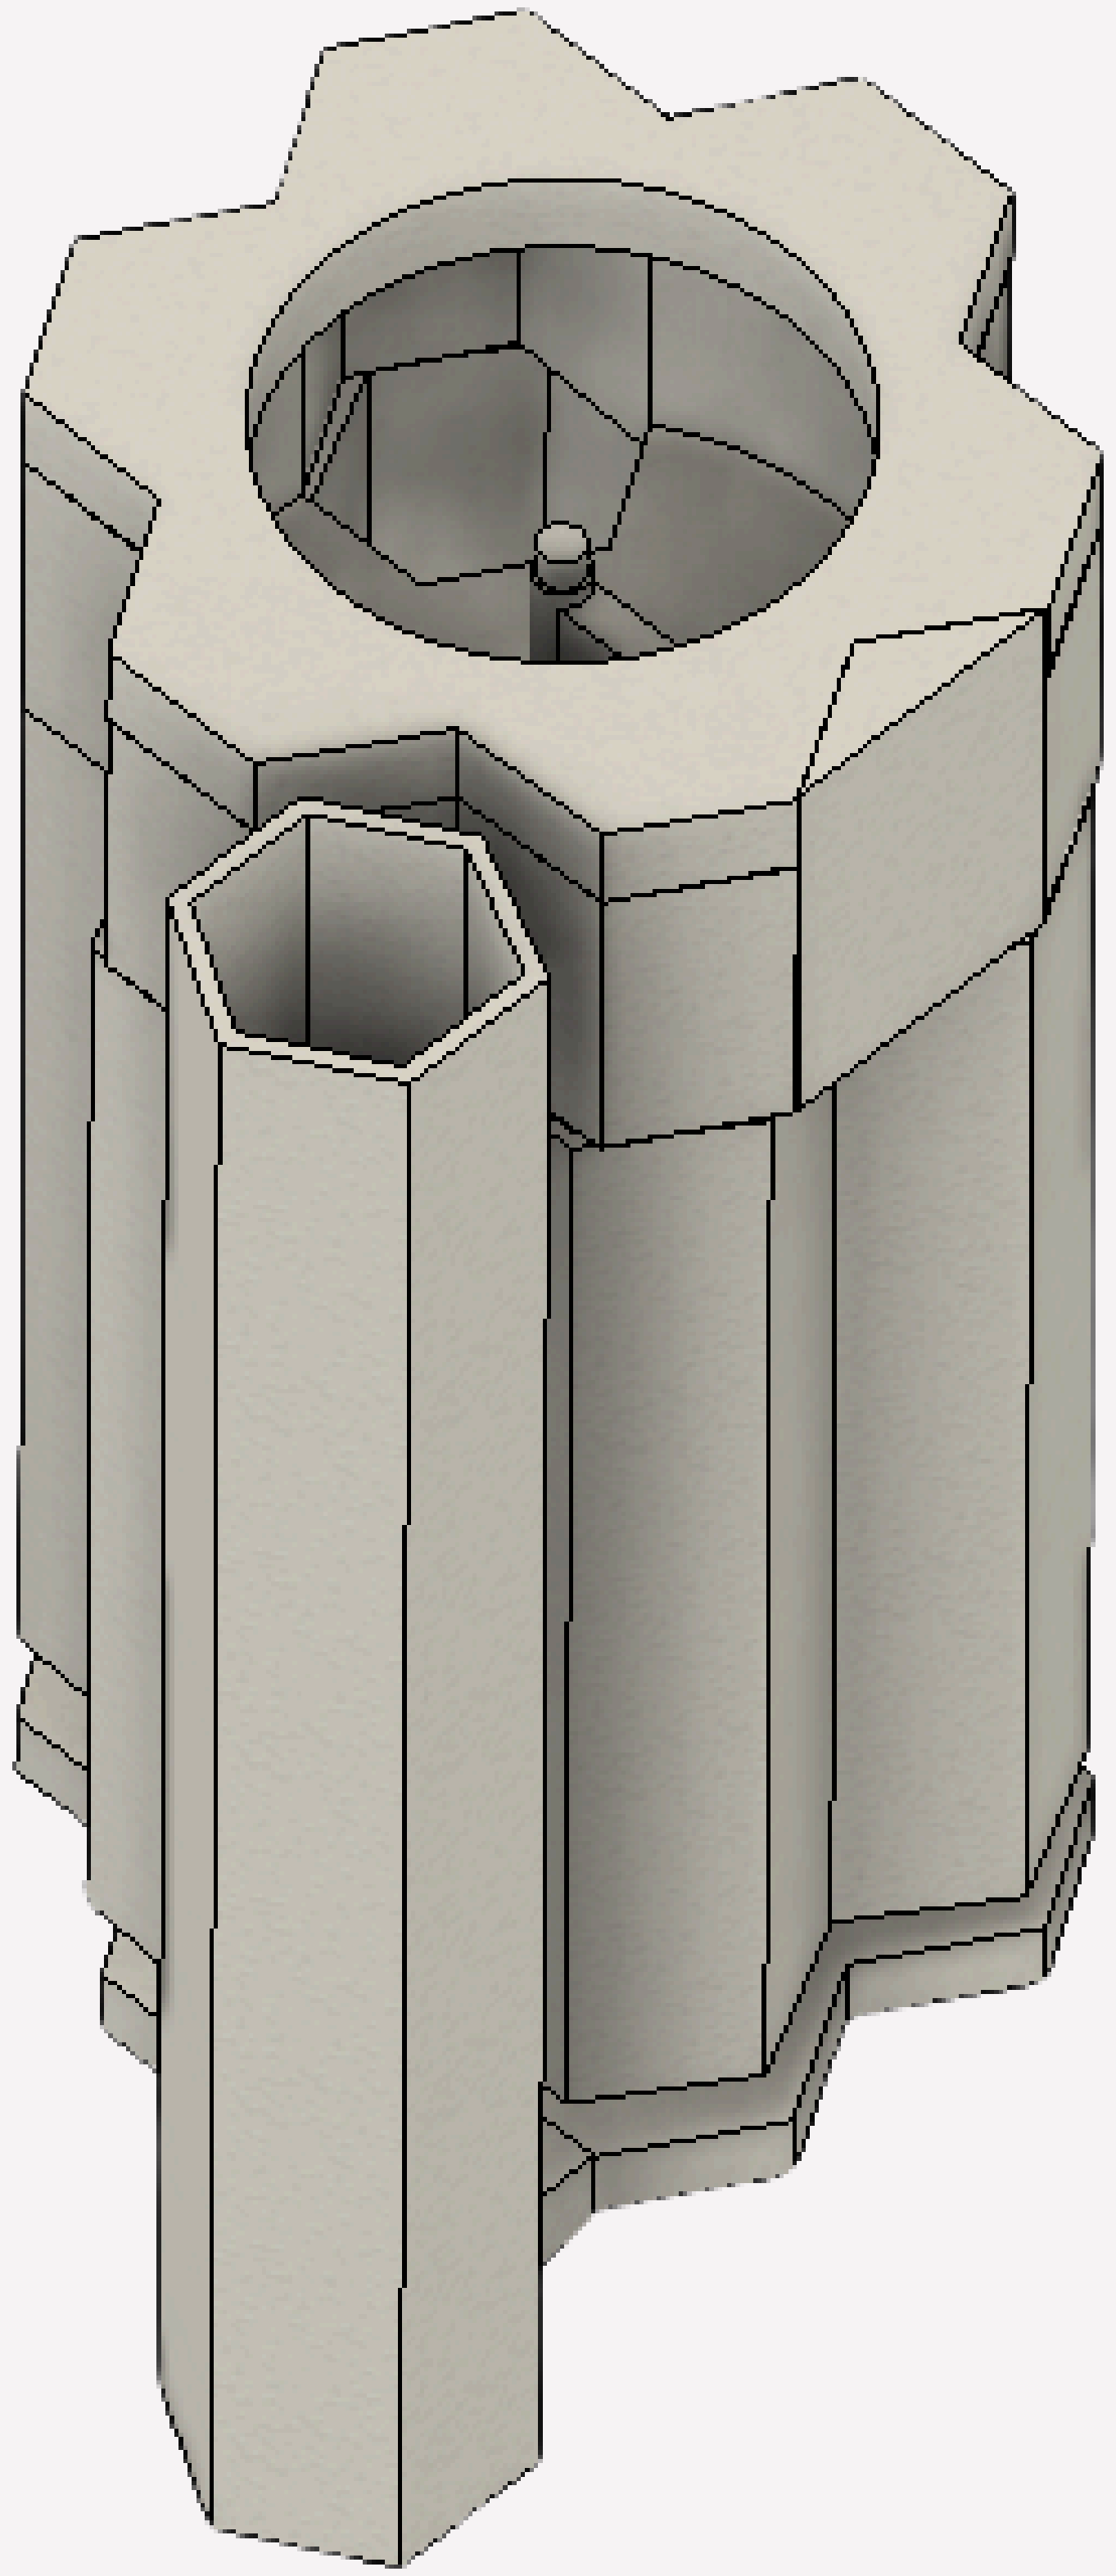

Compressor

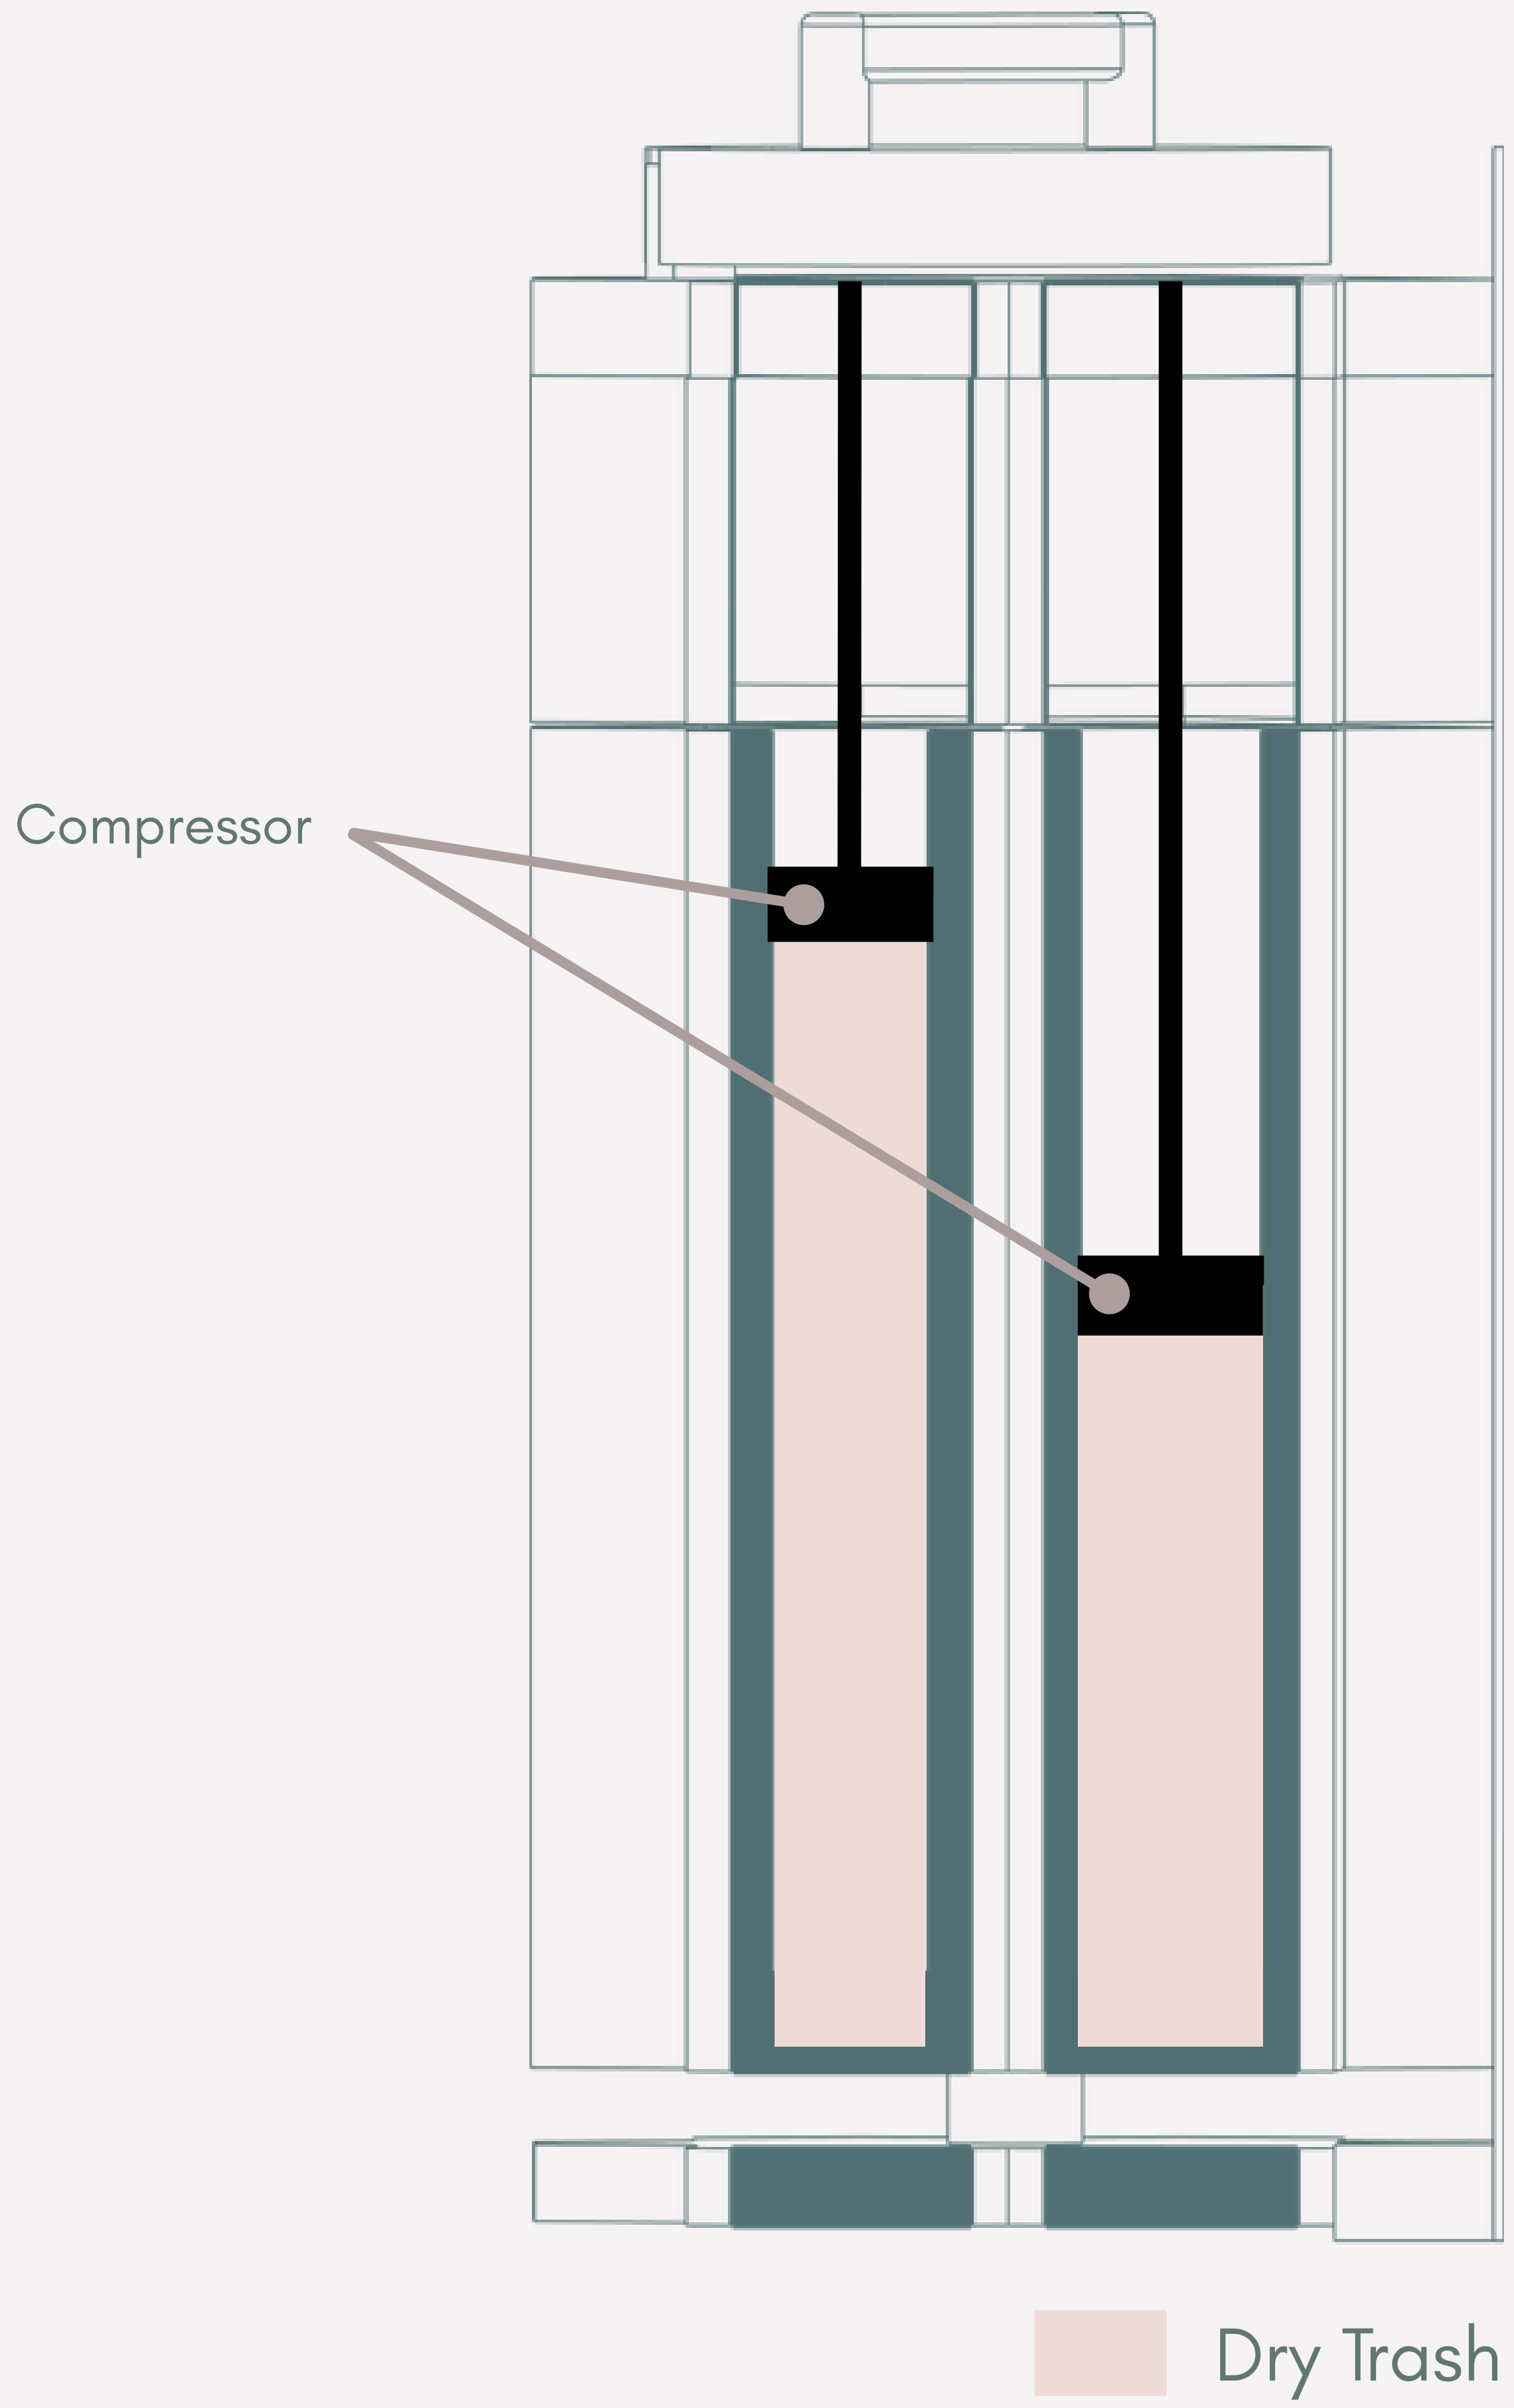

Testing Process

Initial Prototype

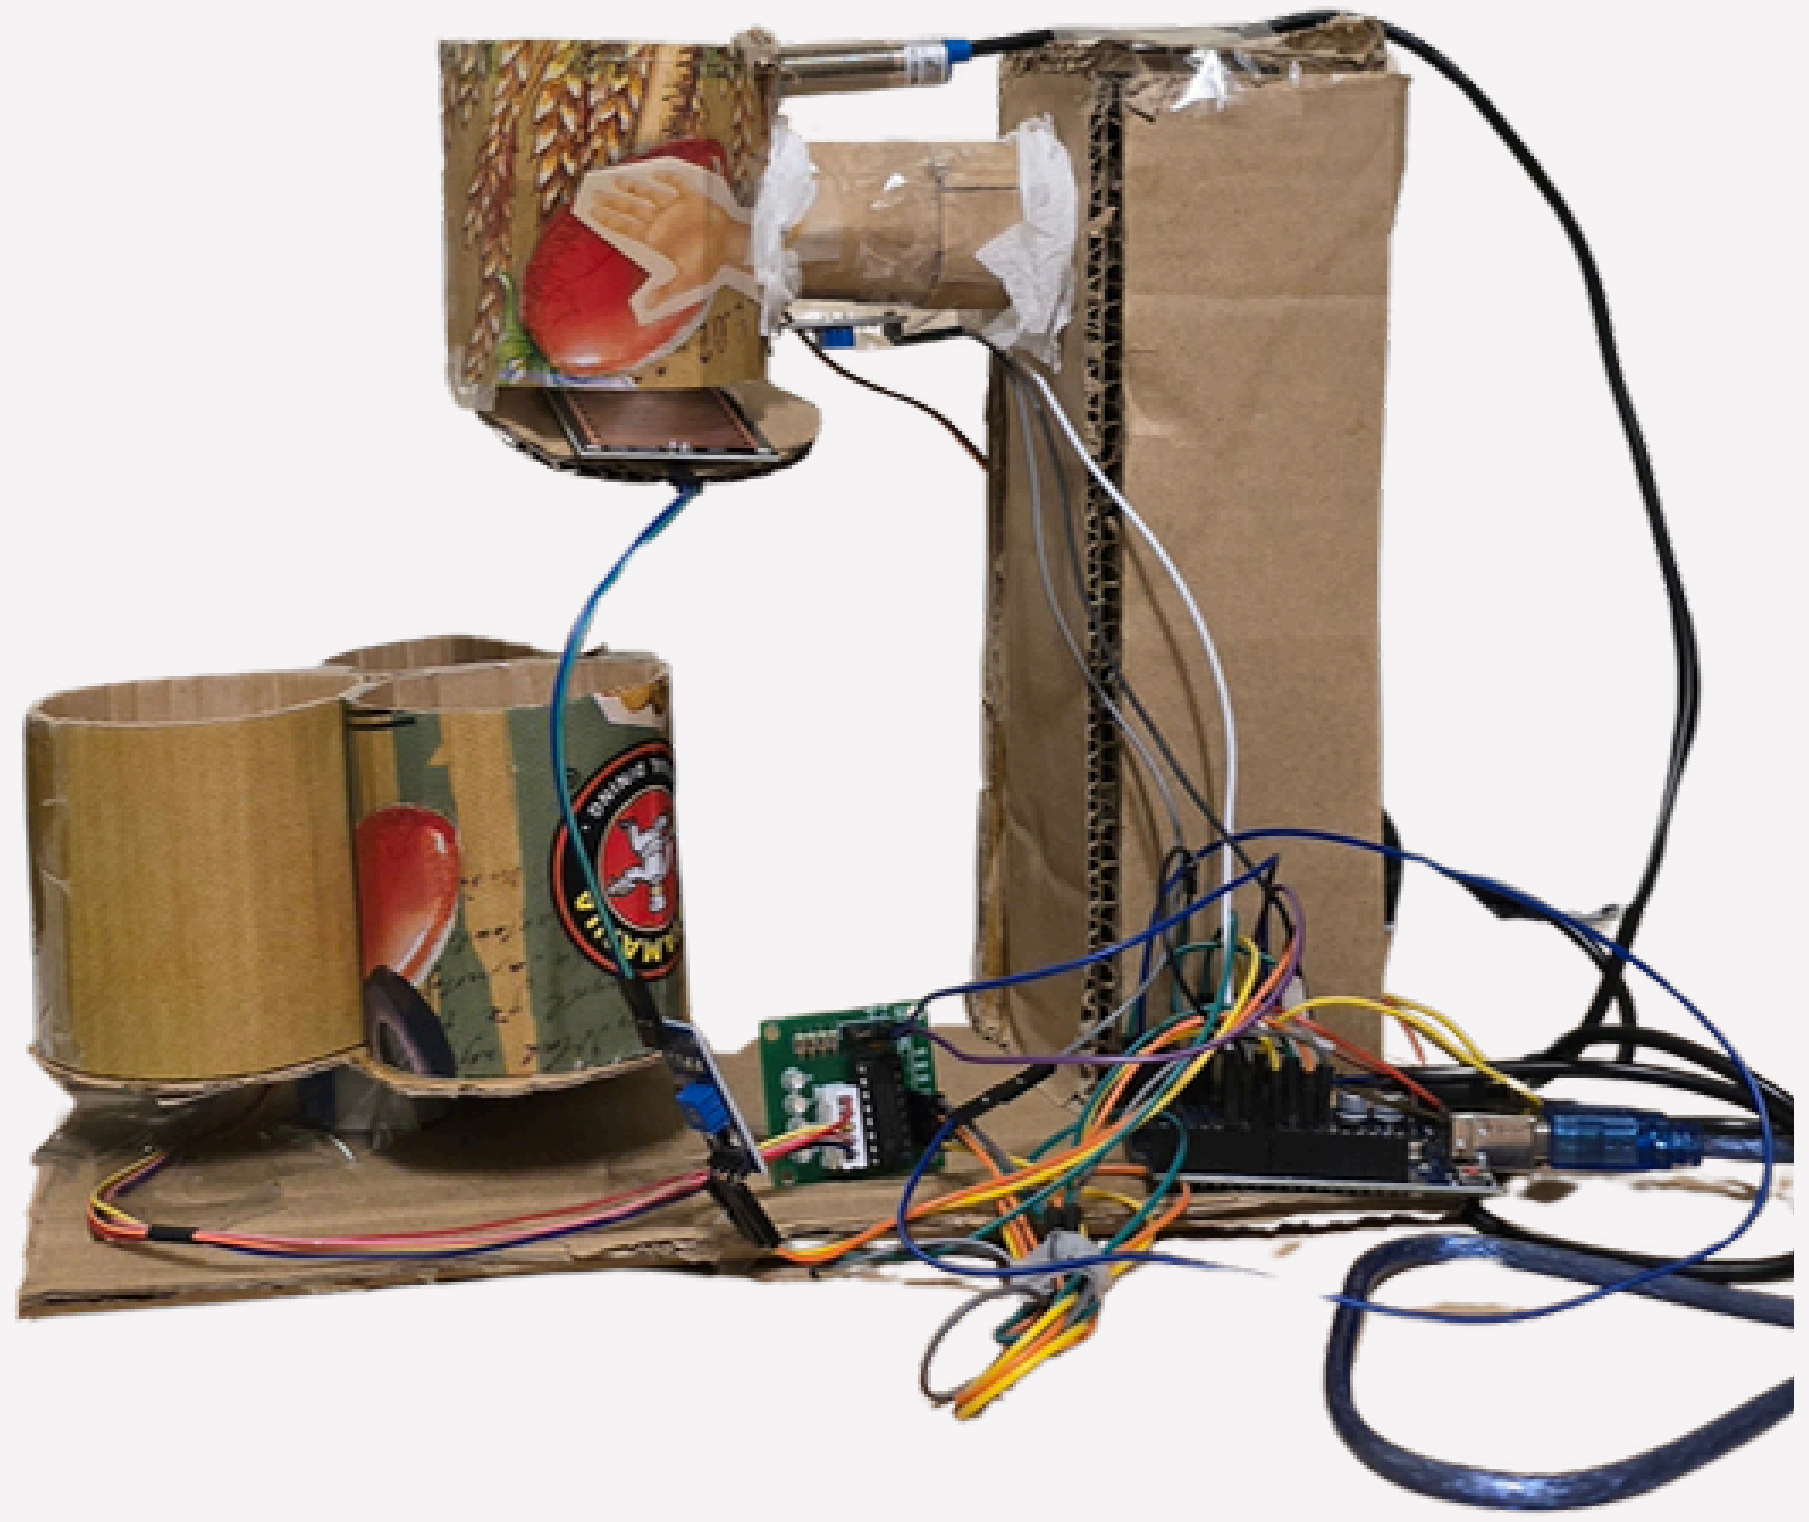

Type of trash	Size (cm)	First Prototype Sorting Accuracy
Plastic	4.5 x 3	66%
	3 x 3	33 %
tissue	5.5 x 4.5	0
	4.5 x 3	0
Battery	4.8 x 2.5	0

Testing Accuracy Comparison: Prototype vs Final Product

Final Prototype

Type of trash	Size (cm)	Final Product Sorting Accuracy
Plastic	4.5 x 3	**70 %**
	3 x 3	**50%**
tissue	5.5 x 4.5	**50%**
	4.5 x 3	**50%**
Battery	4.8 x 2.5	**50%**

Considerations

Considerations

Location

Considerations

Location

Ergonomics

Considerations

Location

Ergonomics

Efficiency

User Journey

7:00 am

Cleaning Auntie:

- Checks TrashCan dashboard for fill levels.
- Sees Pantry Bin at not full - notes for later.
- Feels informed, no need for unnecessary rounds.

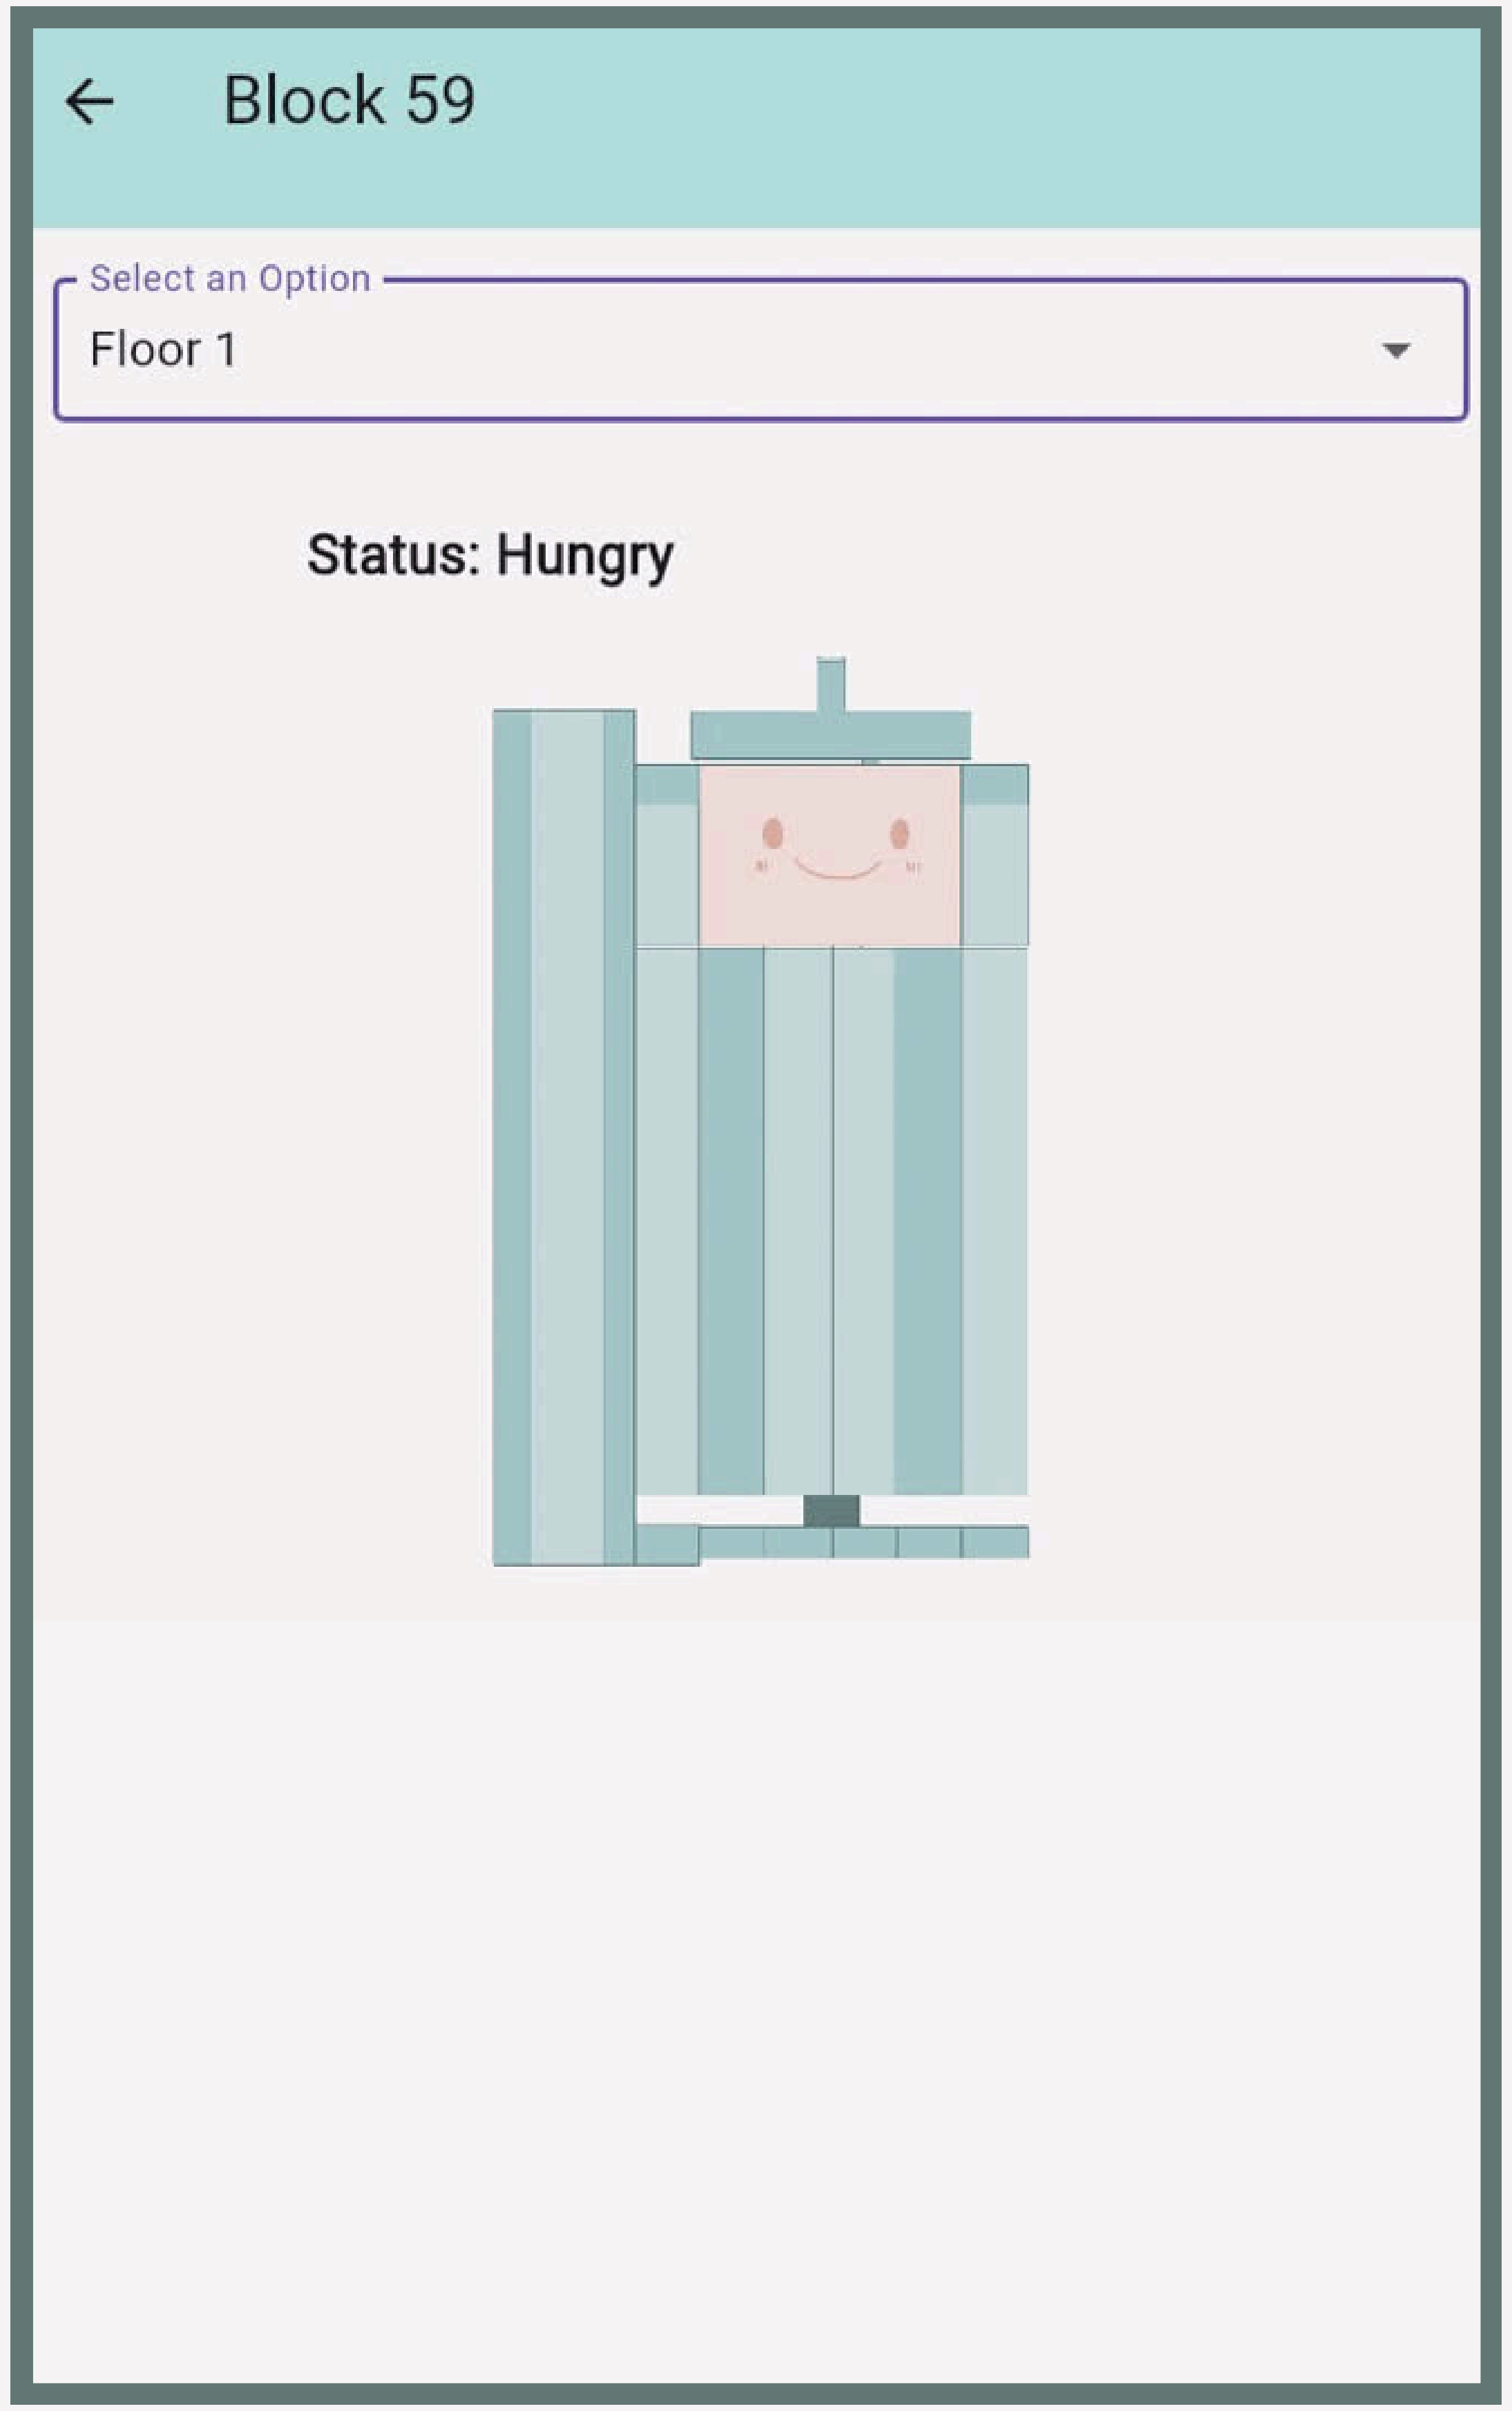

9:00 am

Student:

- Rushing for Breakfast
- Confused how to to throw half filled can.
- TrashCan to rescue with its cheerful sound.

10:00 am

Cleaning Auntie:

- Receives notification: "Dry waste full."
- Clears the bin.
- Happy that she doesn't have to check every hour

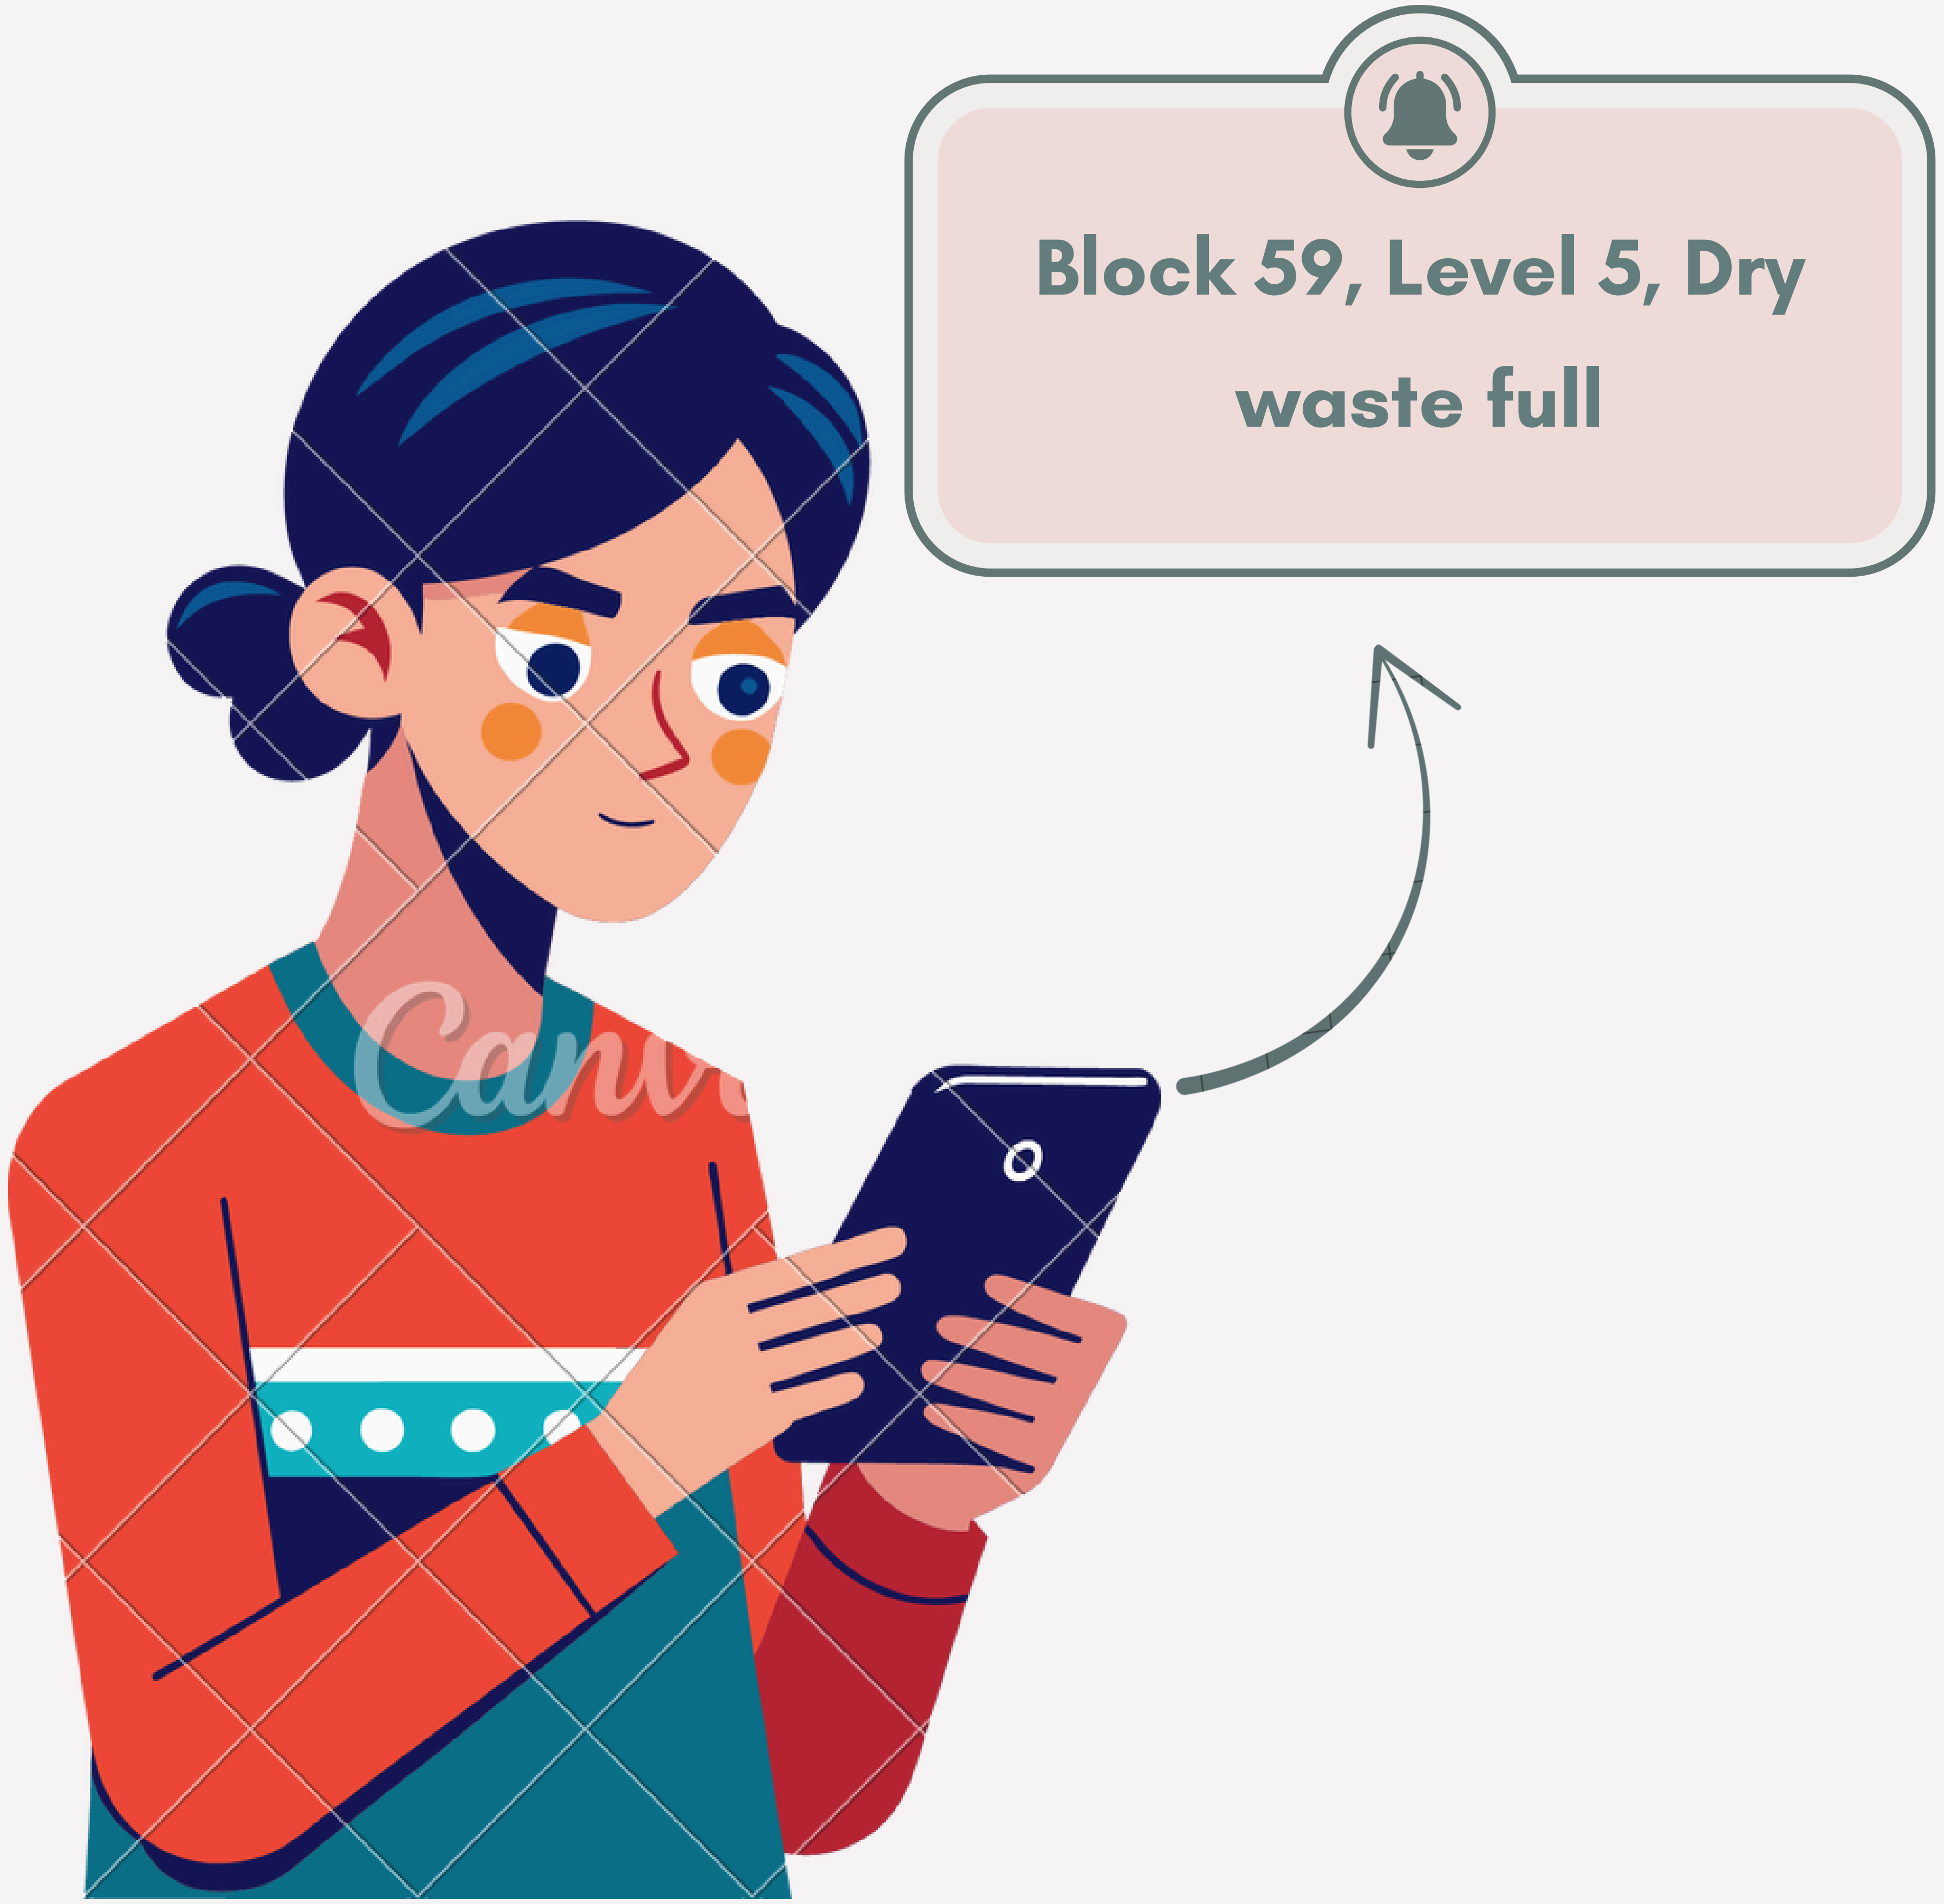

5:00 pm

Cleaning Auntie:

- Final check on dashboard.
- Leaves feeling satisfied, and less exhausted.

Thank You

Combined systems prototype

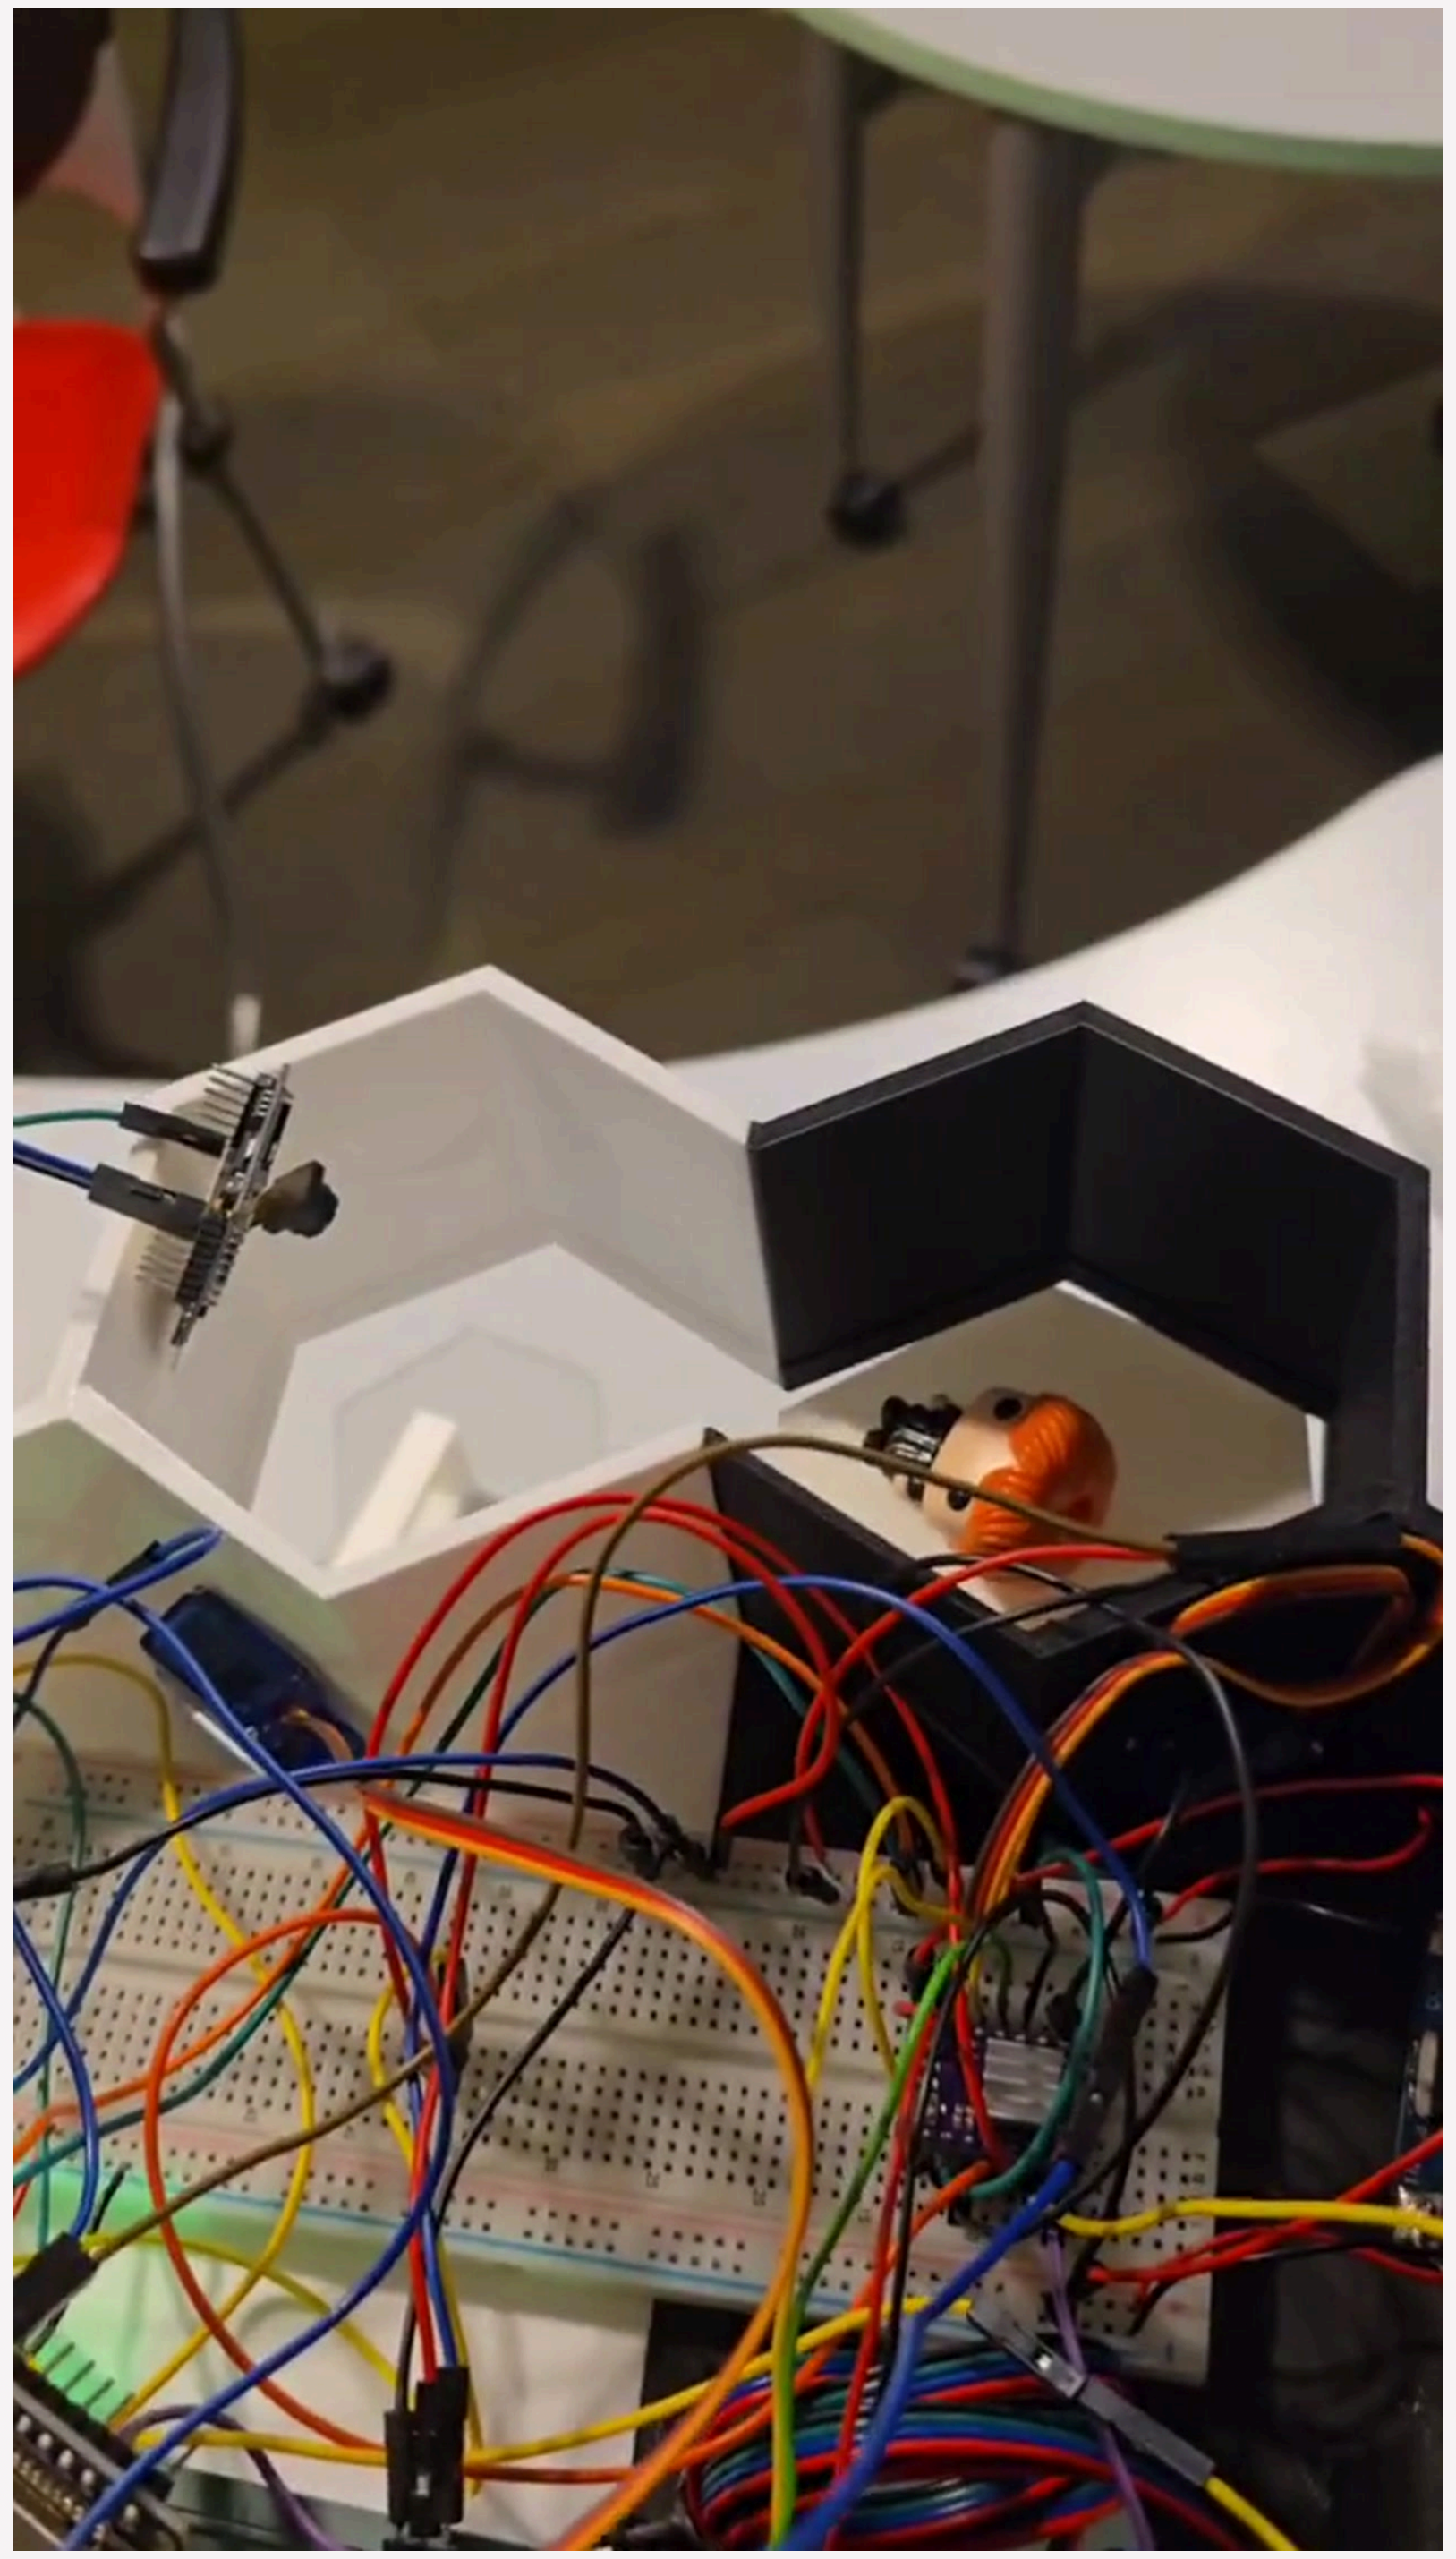

SITE MODEL
ANIMATION PLAYED
ON LOOP

Kayla Tham Ke Yi 1008548 | Kopal Darshna 1009179 | Mehrotra Anandi 1009196 | Venkatesh Thanushree 1009339 | Audrey Dominique 1009687

Design Process

Problem Statement

How might we create an effective cleaning solution to improve hygiene standards and efficiency for cleaning staff?

2 First Physical Iteration

Main Goal: Ensure rotation of the motors of the spinning parts are functional.

Identified Issues:

-Difficulty in rotation of the Server Motor.
-Proximity Sensor malfunctions.
-Modular compartments constantly topples.
-IR Sensor detects bin material

4 Developed Physical Prototype

- Switched to sorting items one by one for better control and accuracy
- Replaced traditional sensors with ESP32-CAM module for better detection accuracy
- Added a transparent top cover to allow natural light into the camera module

Type of trash	Size (cm)	First Prototype Sorting Accuracy	Final Product Sorting Accuracy
Plastic	4.5 x 3	66%	**70 %**
	3 x 3	33 %	**50%**
tissue	5.5 x 4.5	0	**50%**
	4.5 x 3	0	**50%**
Battery	4.8 x 2.5	0	**50%**

Testing Accuracy Comparison: Prototype vs Final Product

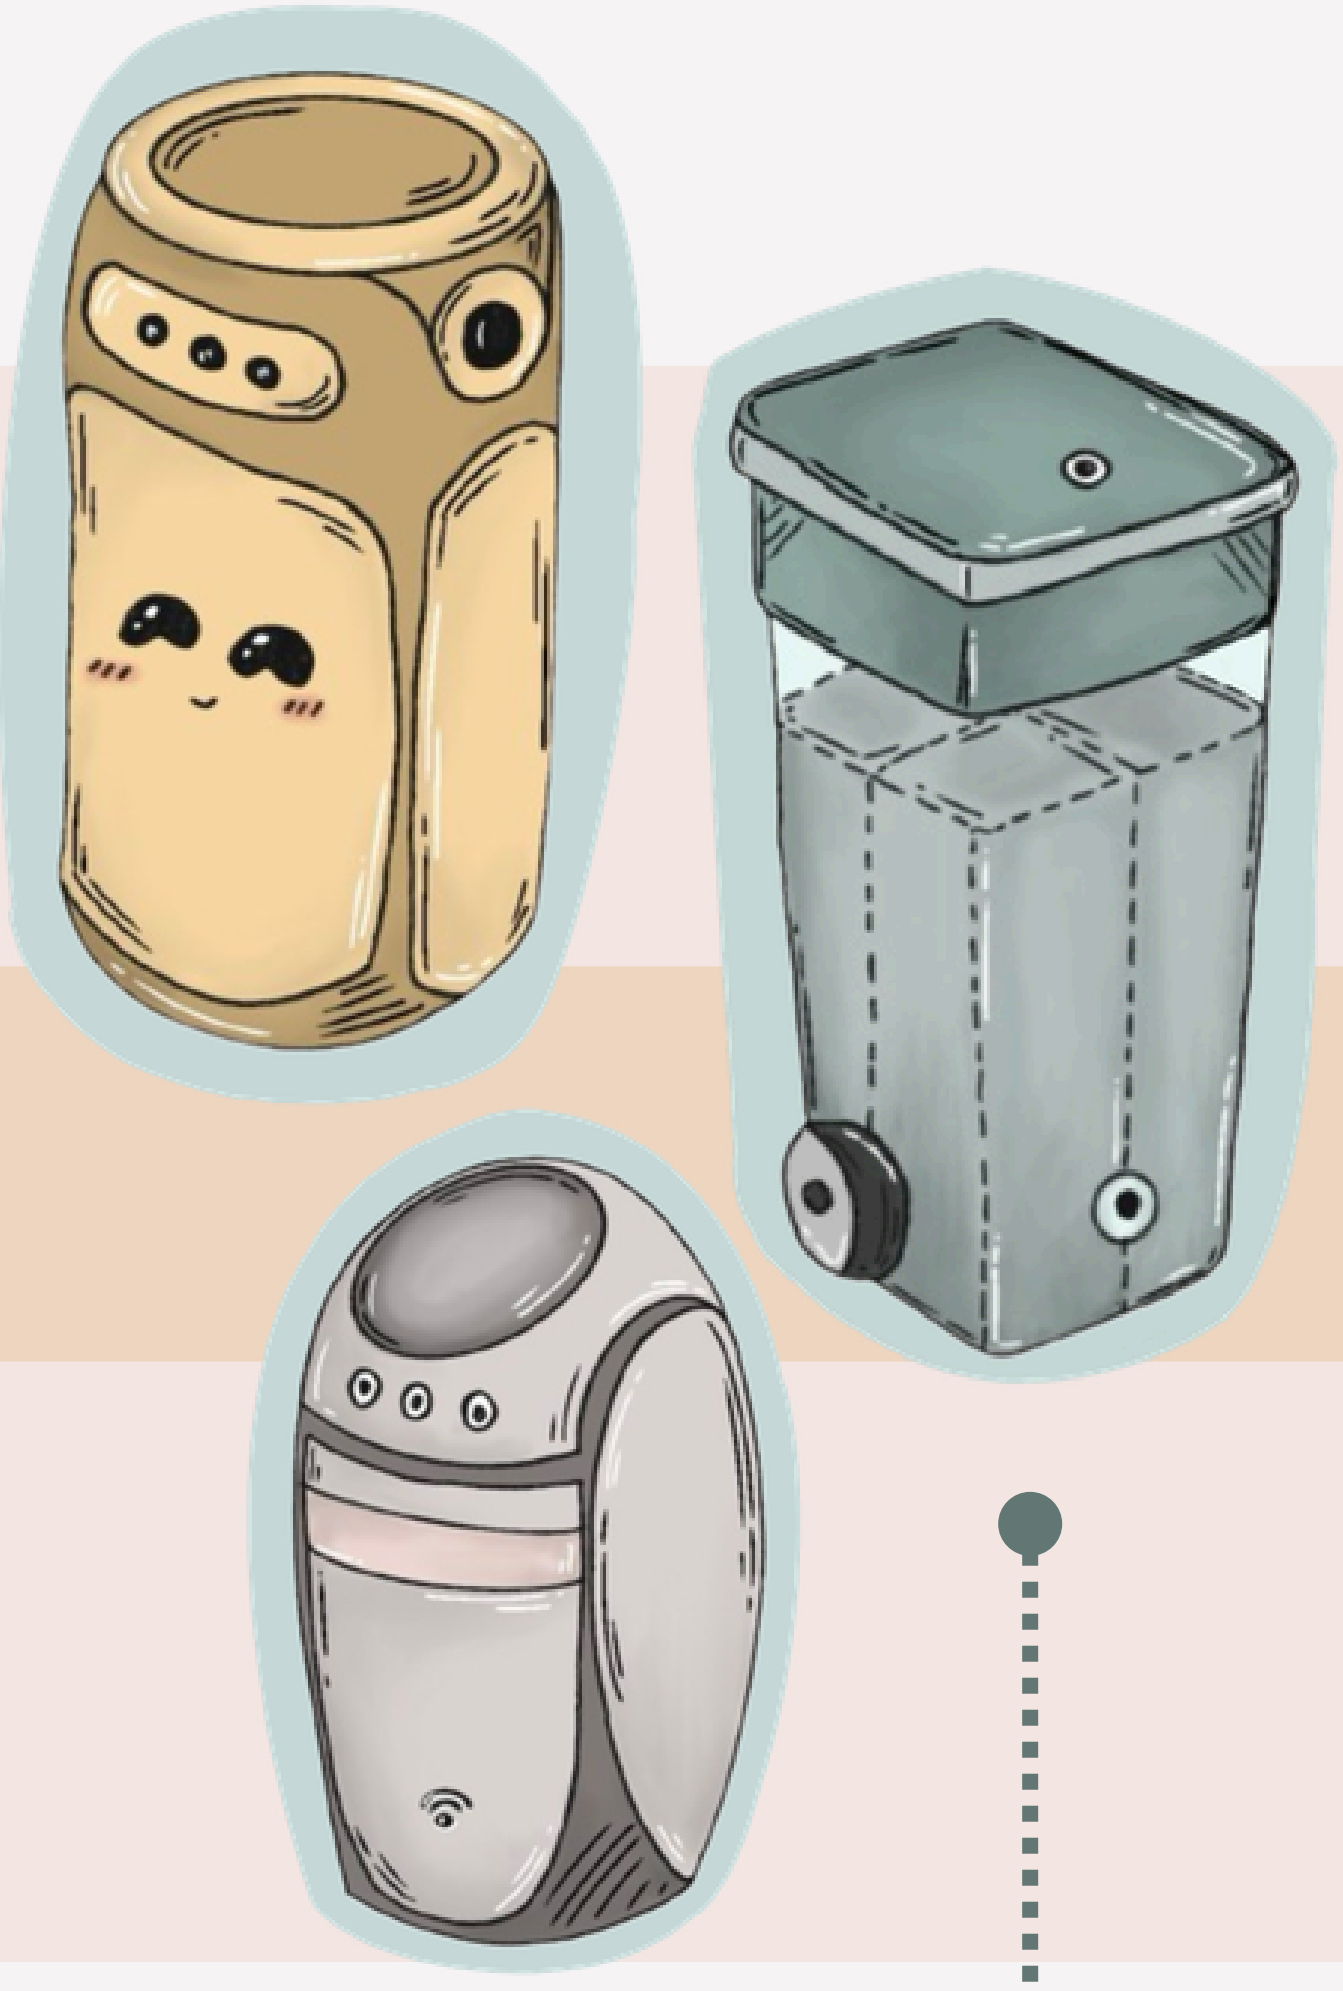

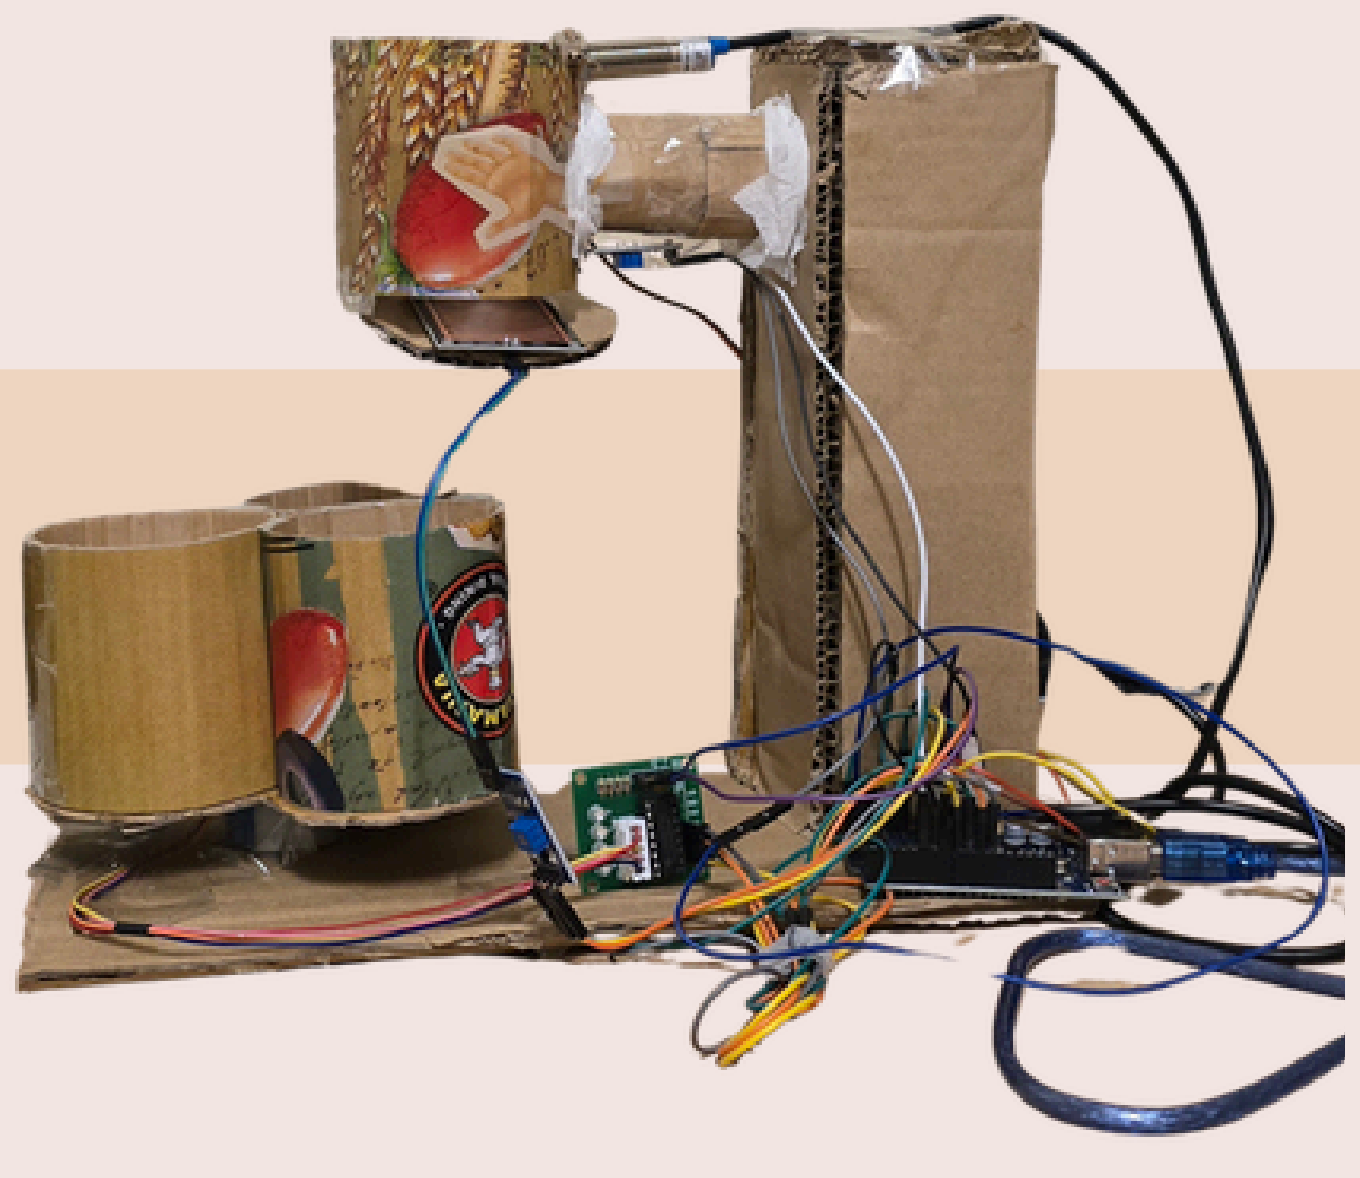

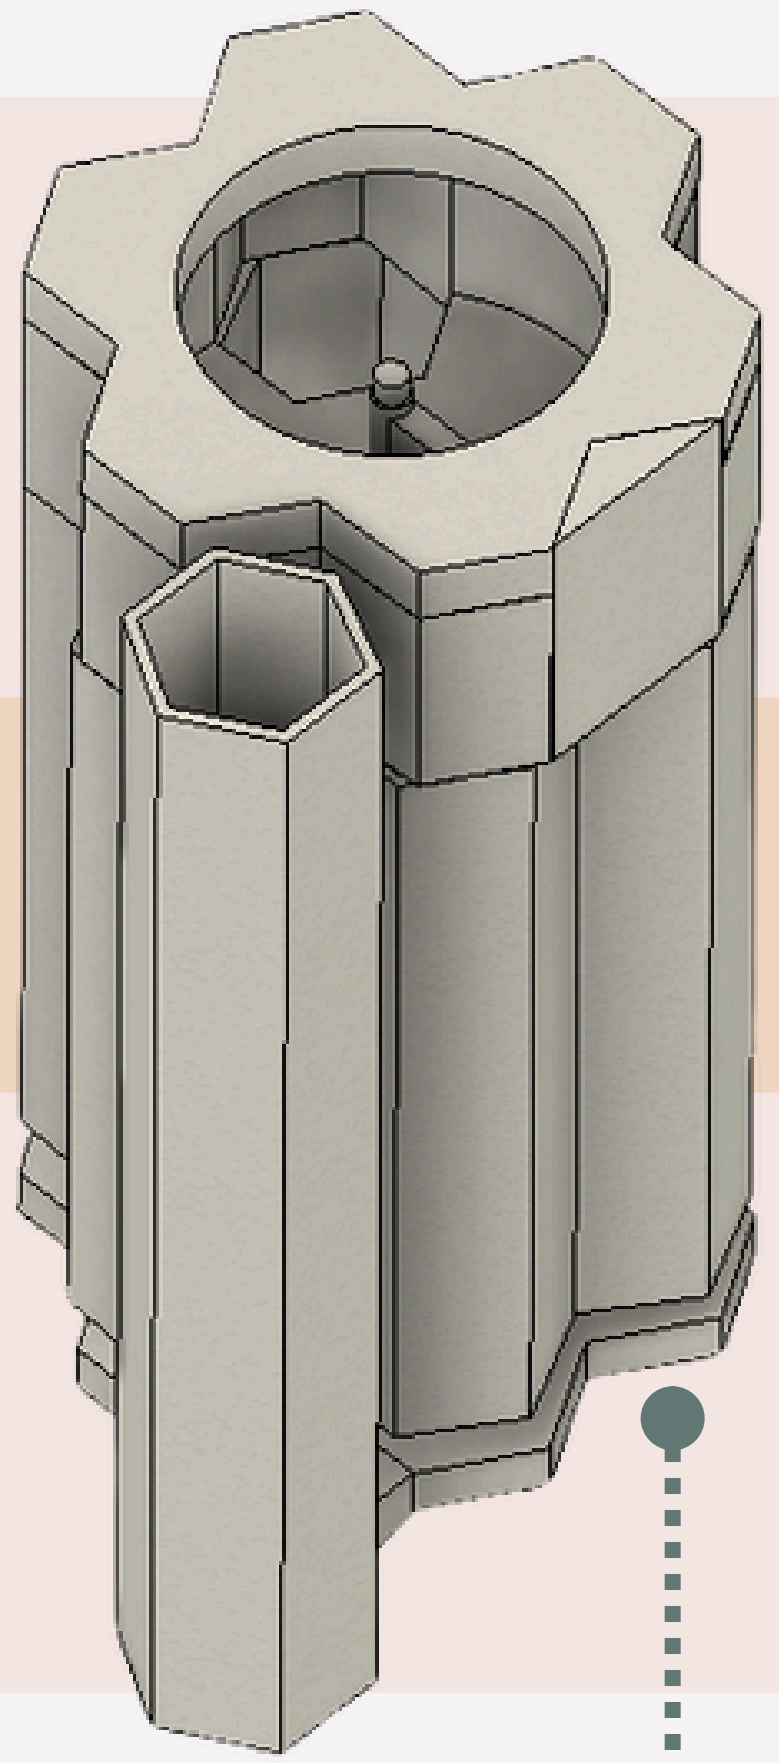

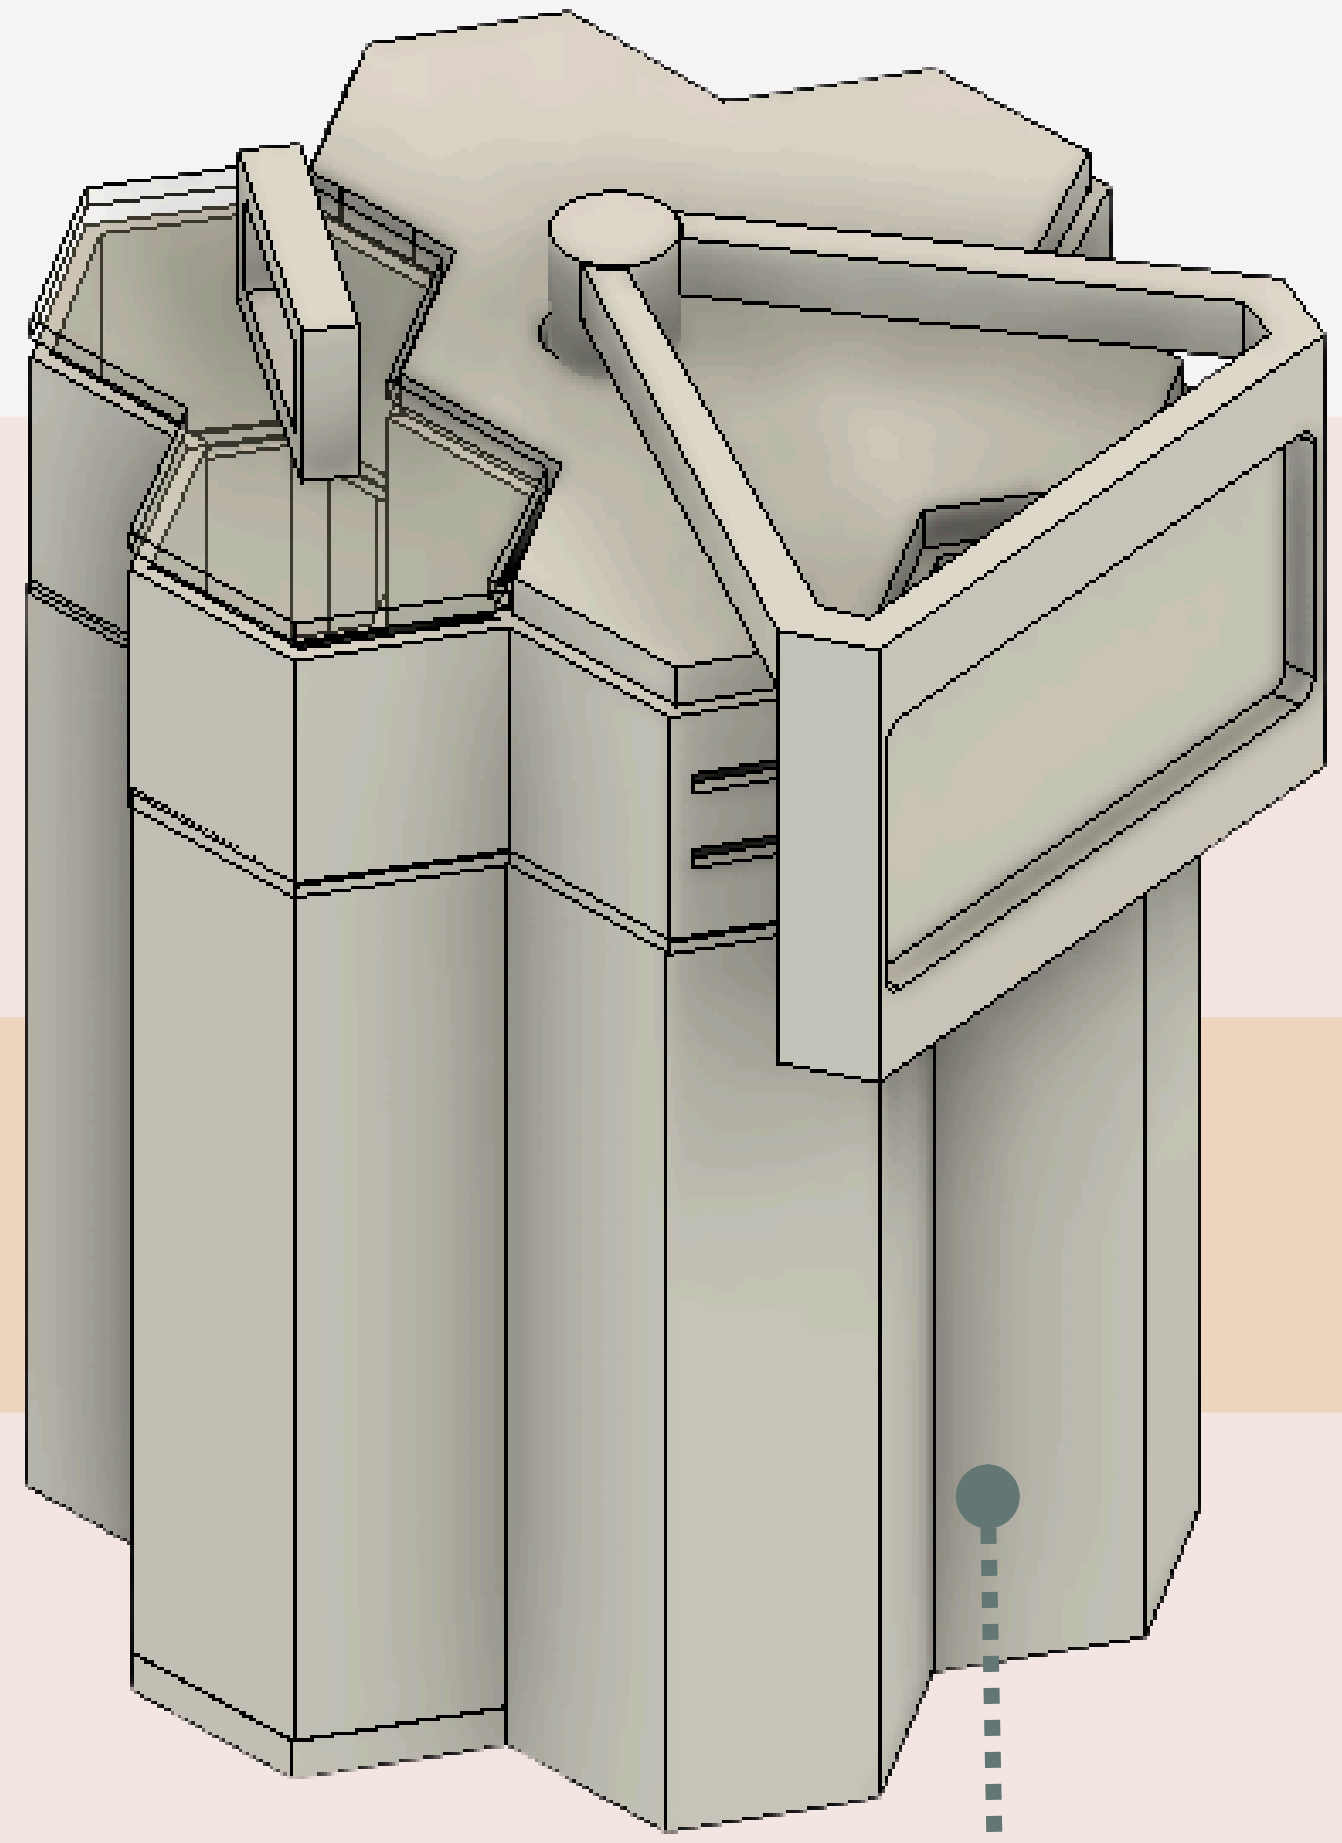

1 Initial Concept Sketch

This initial sketch outlines the basic features and structure envisioned for the sorting bin.

Each item was tested three times to ensure consistency in sorting performance. The first prototype, built with an IR sensor and basic sorting logic, showed limited success. It achieved 66% accuracy for larger plastic, 33% for smaller plastic, and 0% accuracy for both tissue and battery waste. These shortcomings were primarily due to sensor limitations, misalignment in the rotating lid, and overly simple detection logic, which led to misclassification or failure to detect certain materials.

3 First CAD ver. Model

- Designed for automatic sorting after all trash is inserted
- Used hexagonal bins for a clean, modular design when detached
- Added interactive elements to enhance user engagement

5 Finalized CAD

- Extended screen display for easier interaction.
- Reusing recycled material instead of PLA

In contrast, the final prototype demonstrated 50% sorting accuracy across all tested categories, including plastic, tissue, and battery. This significant improvement was achieved by implementing several key upgrades: better mechanical alignment, replacement of the IR sensor with an ESP32-CAM module, and refined sorting algorithms. These enhancements allowed the system to reliably detect and correctly sort various waste types, making it a dependable and functional automatic trash-sorting bin.

Kayla Tham Ke Yi 1008548 | Kopal Darshna 1009179 | Mehrotra Anandi 1009196 | Venkatesh Thanushree 1009339 | Audrey Dominique 1009687

Critical Image

Material Palette

Stainless steel for nuts, bolts and gears

PLA Plastic for exterior and inner walls of bin



LED Panel for the Face Feature

Rock wool as insulation between the outer and inner walls of the bin

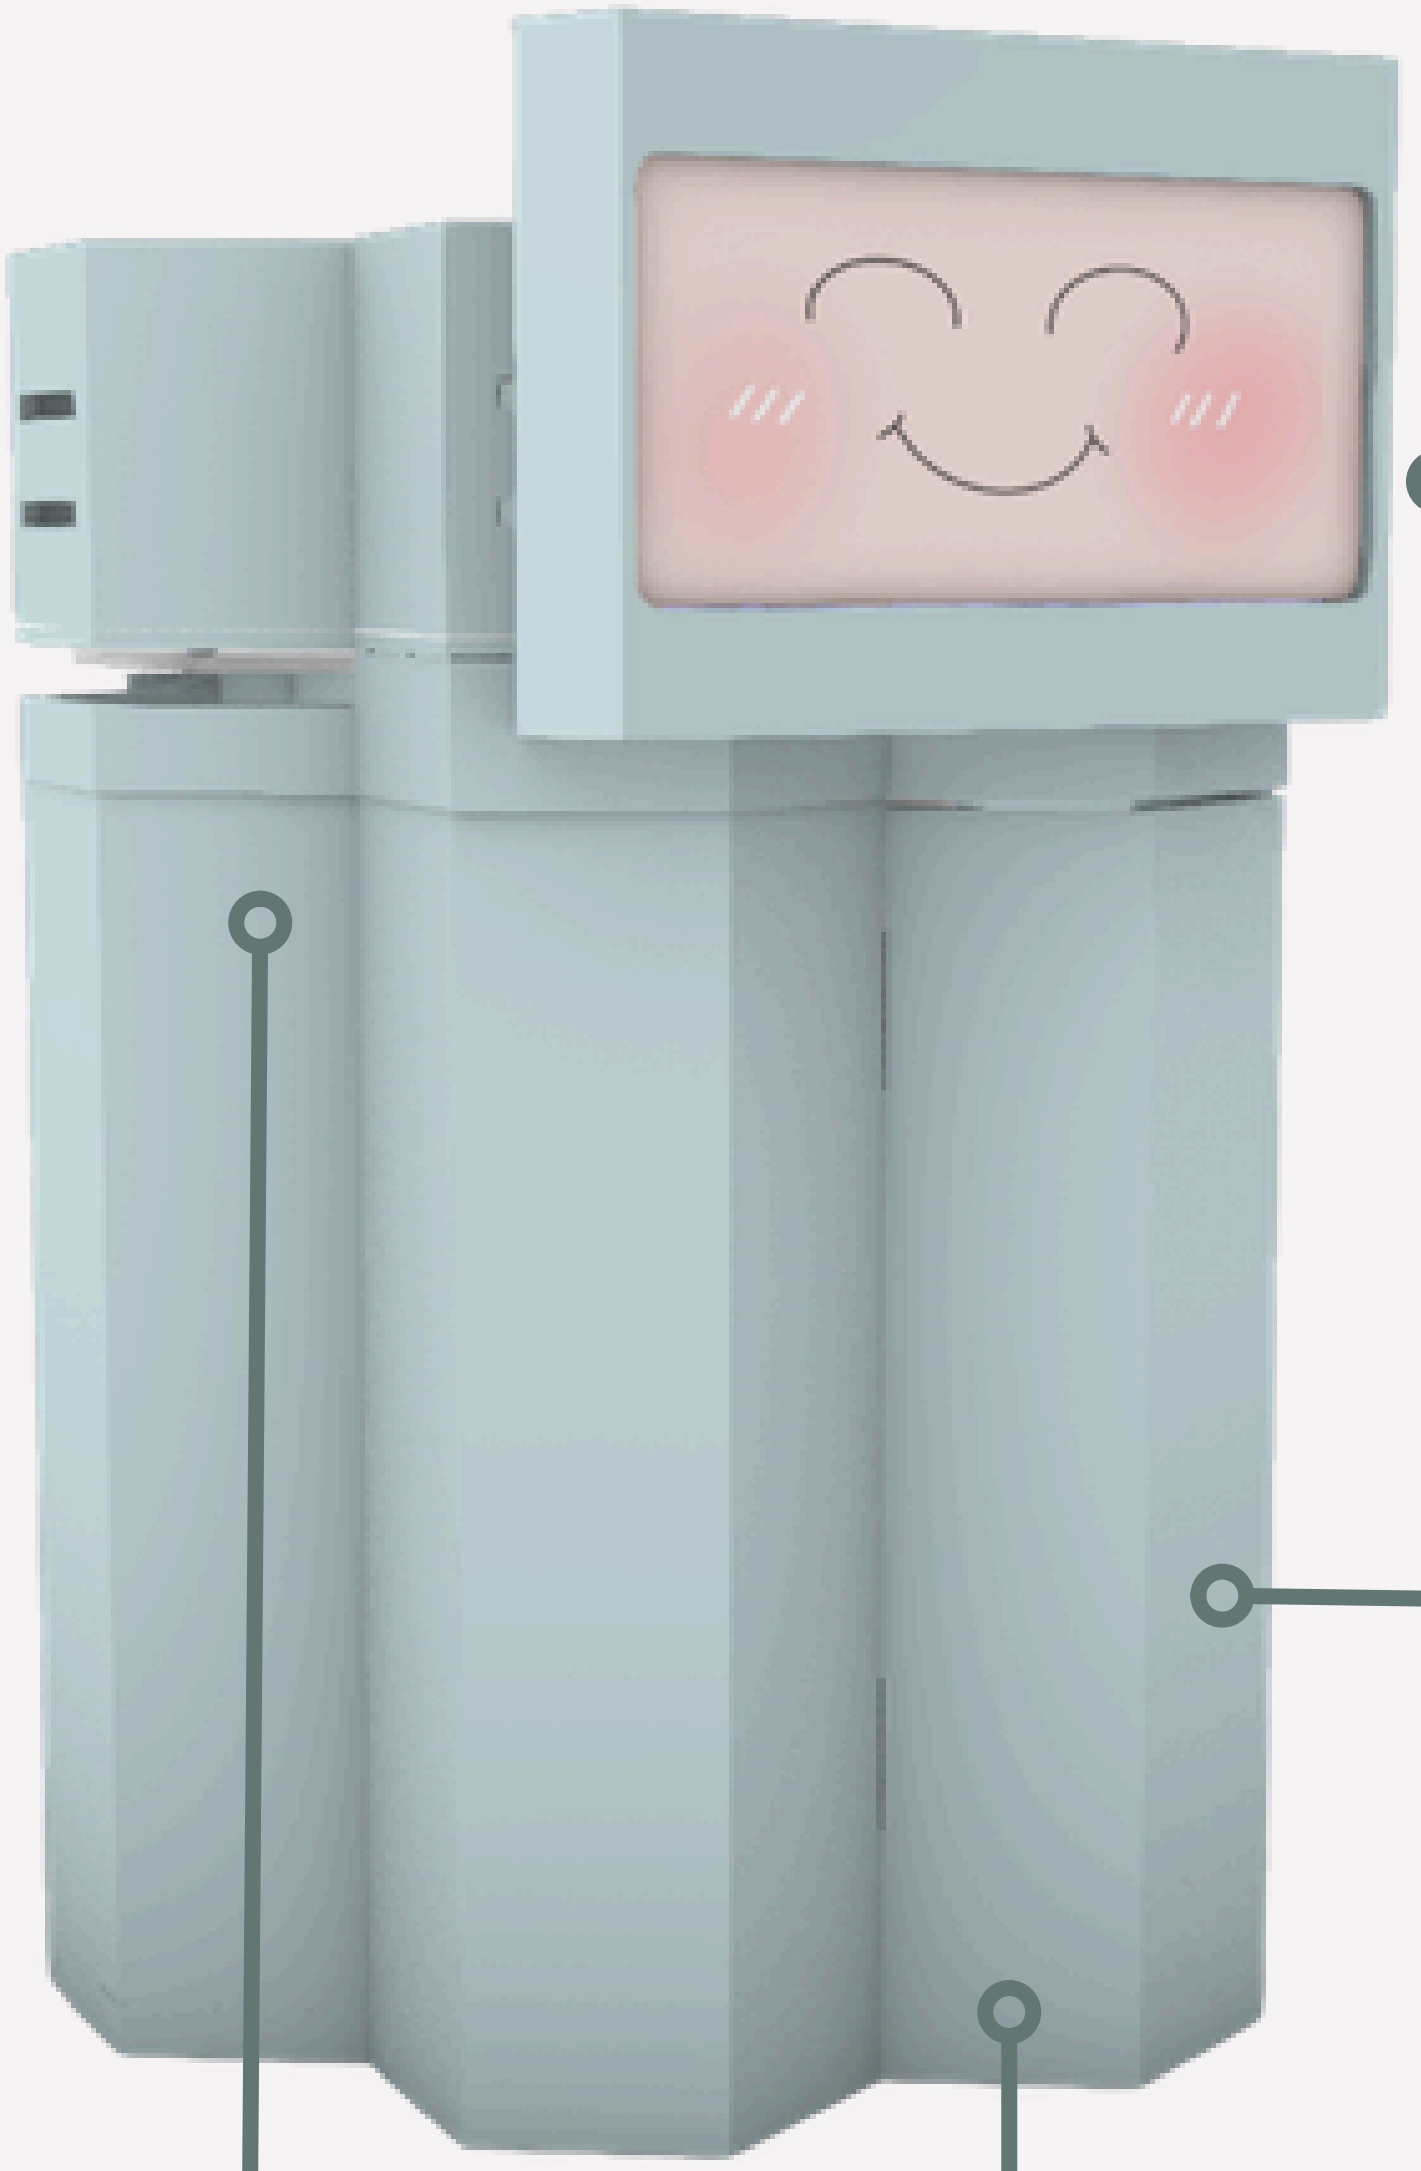

Interactive Emoticons

An interactive face display that reacts with facial expressions every time trash is thrown in to pique user interest.

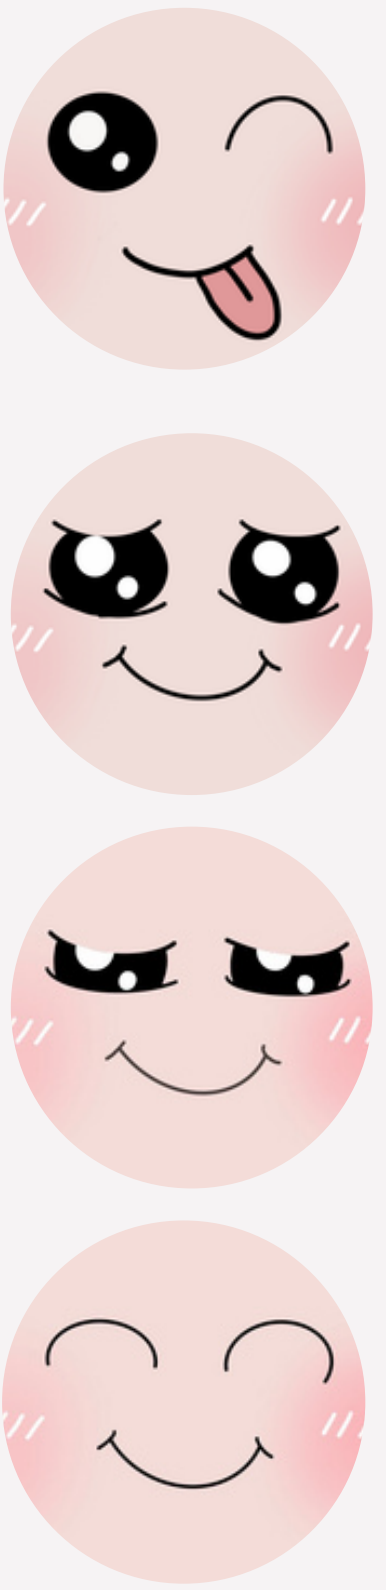

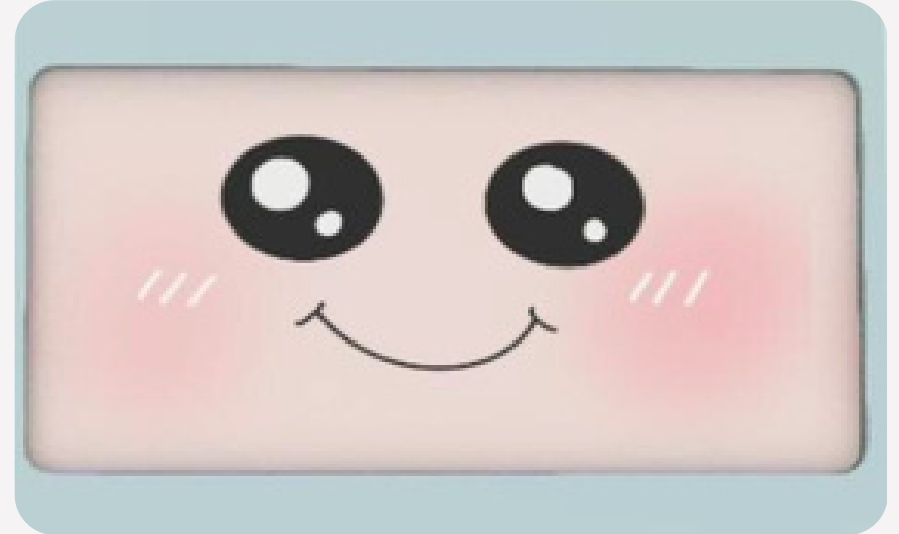

Screen showing Default Emoticon

Detachable sides

Detachable hexagonal doors allow easier trash removal and reduce lifting effort.

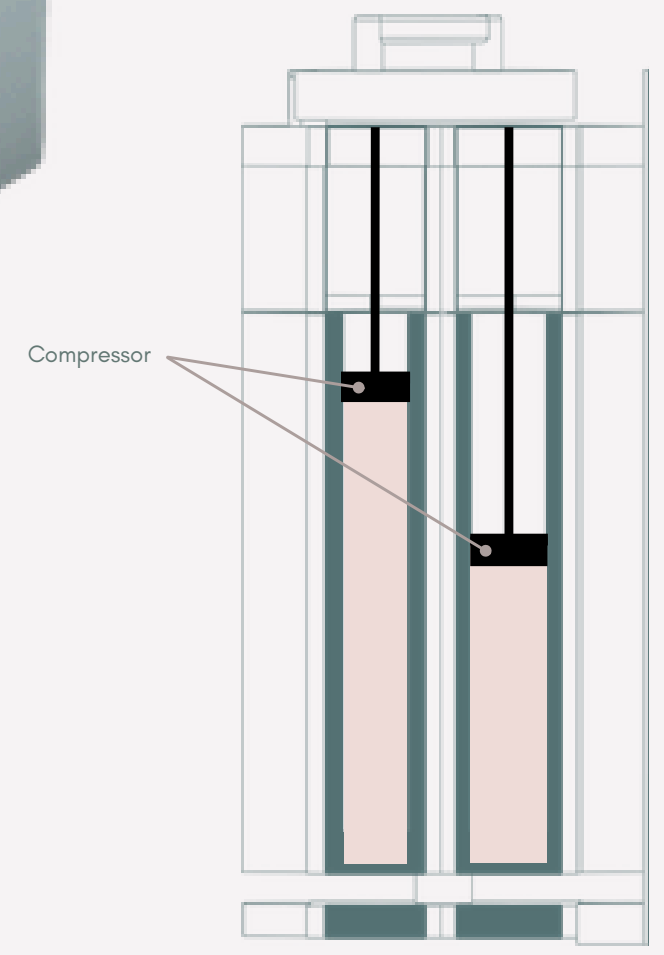

Ultrasonic Sensor:

An ultrasonic sensor is mounted on the inner top surface of each bin compartment. It detects the rising trash level using sound waves and signals when the bin is full. This status is instantly updated in a connected app, alerting cleaners when a bin is full.

Compressor

Built-in compressor in each compartment to compact trash, creating more space.

Perspective of user going to throw trash into product.

Impression of product in relation to site.

Step 1 : The sensing mechanism

Trash is thrown here. ESP32-Camera Module is placed on the side of the compartment, detecting the type of material of the trash which further sends the classified data to ESP32 microcontroller.

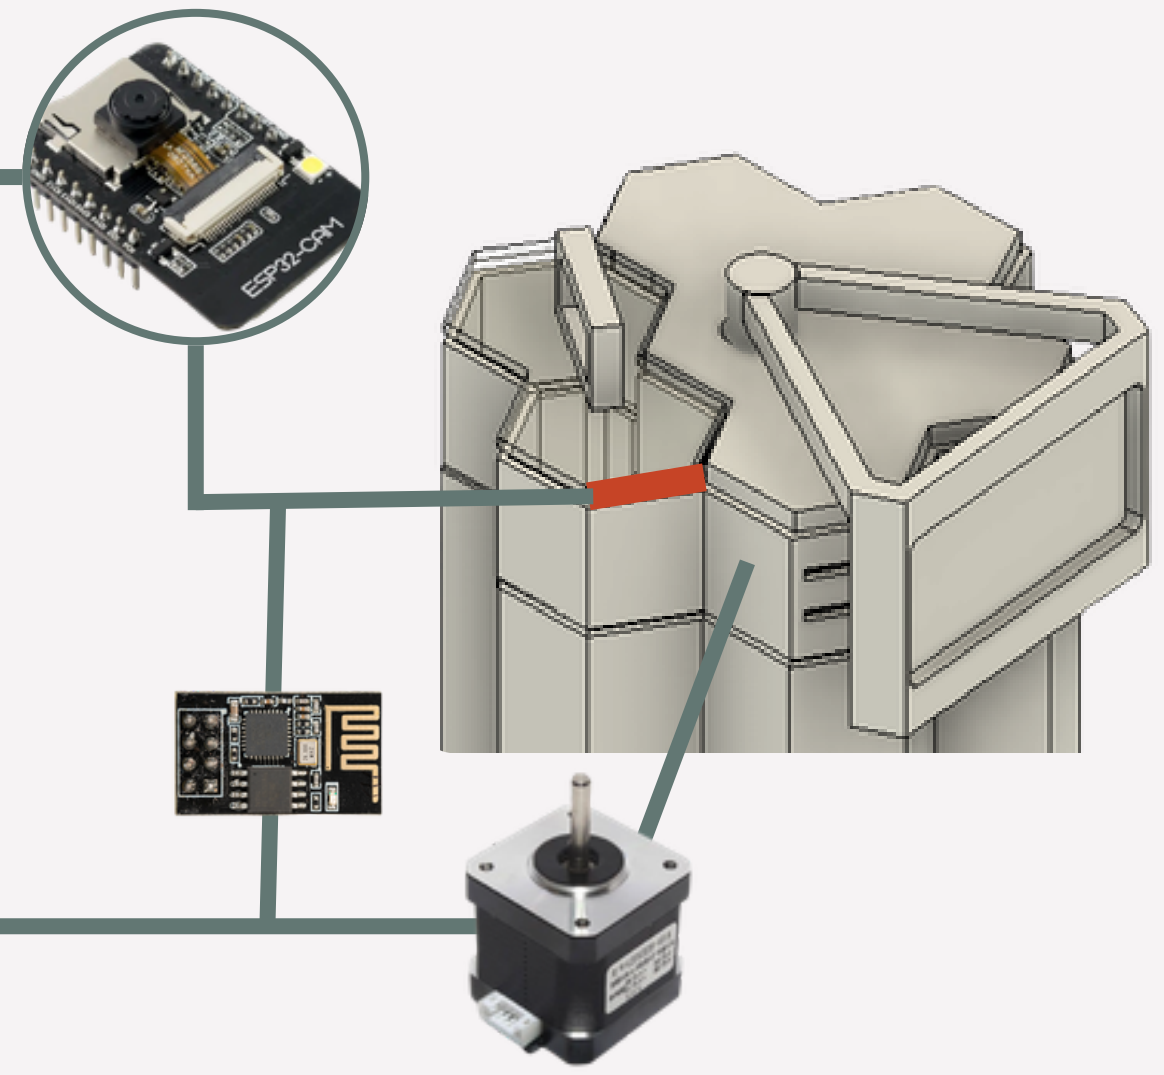

Step 2 : Trash-Based Rotation Mechanism

The second ESP32 controls a stepper motor. Based on the detected trash type, the motor rotates to align the appropriate bin compartment under the lid.

Step 3 : Trash Disposal Mechanism:

Once aligned, the trash is dropped into the correct compartment by opening the bottom lid controlled by servo motors.

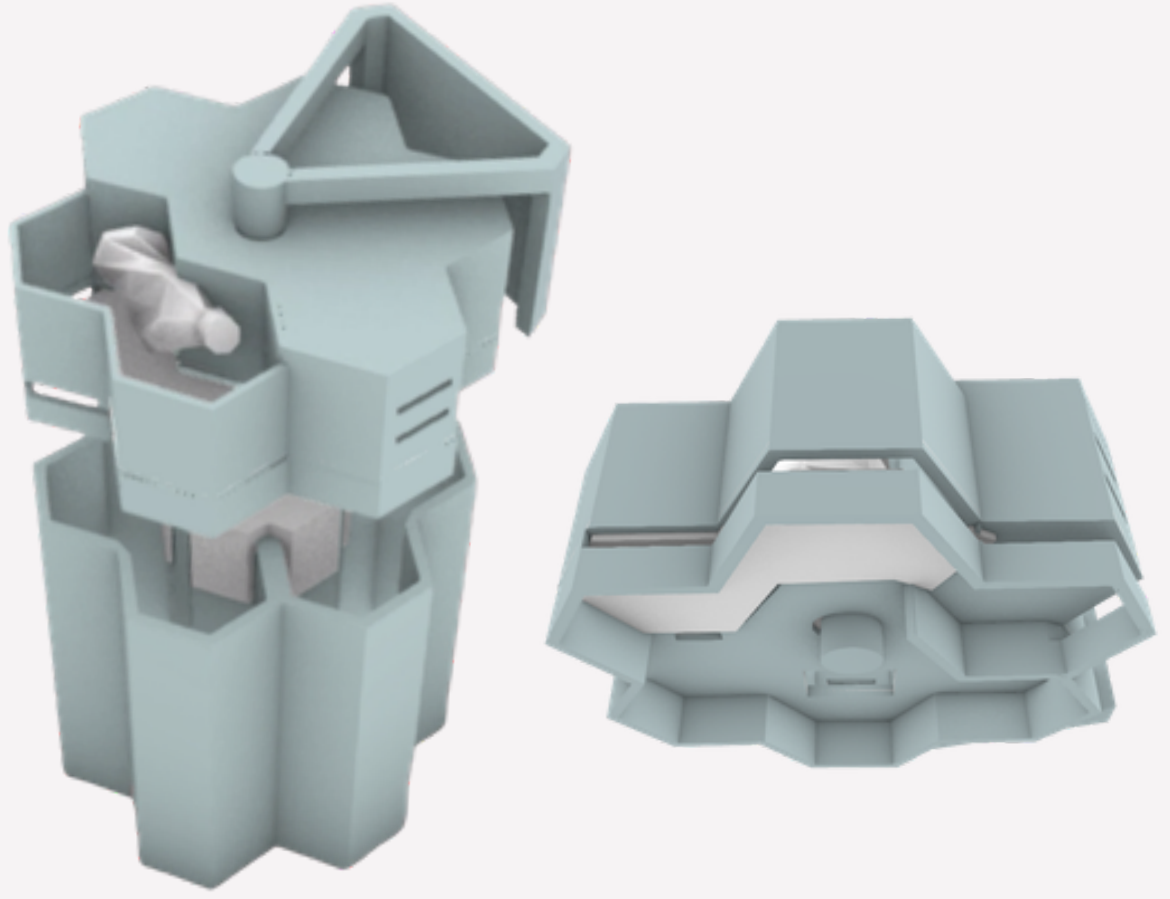

Step 4 : Trash?Can! Updates

With the help of the ultrasonic sensor, Fill level of the bin is updated in the Trash?Can! app. The cleaners would receive a notification when the bin is full. Else, bin status remains as 'Hungry'