



S Section 1:100@A3

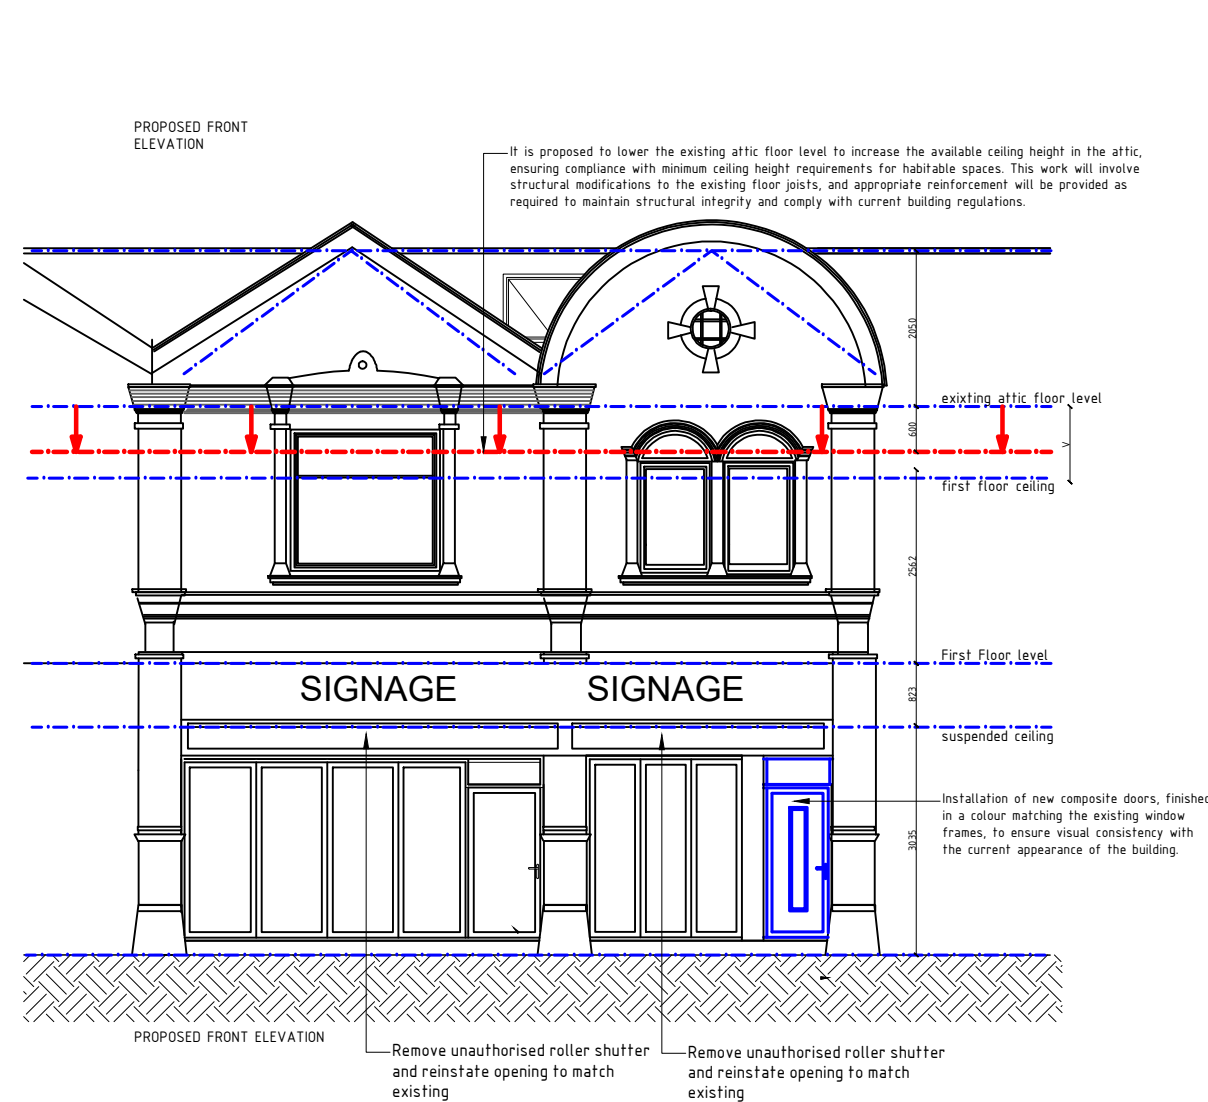

REMOVAL OF UNAUTHORISED ROLLER SHUTTER
This application includes the removal of the existing unauthorised roller shutter installed on the principal elevation. The shutter, not original to the building, does not reflect the architectural character or historic significance of the surrounding conservation area. Its removal will not only restore the elevation's appearance to a more appropriate form but also significantly enhance the visual amenity of the street scene, creating a more appealing and harmonious environment.
The opening will be reinstated using materials and detailing that match the existing building fabric, ensuring a sympathetic and historically consistent outcome. This measure directly addresses the concerns raised by the Conservation Officer and is a clear demonstration of the applicant's unwavering commitment to preserving and enhancing the heritage value of the site.

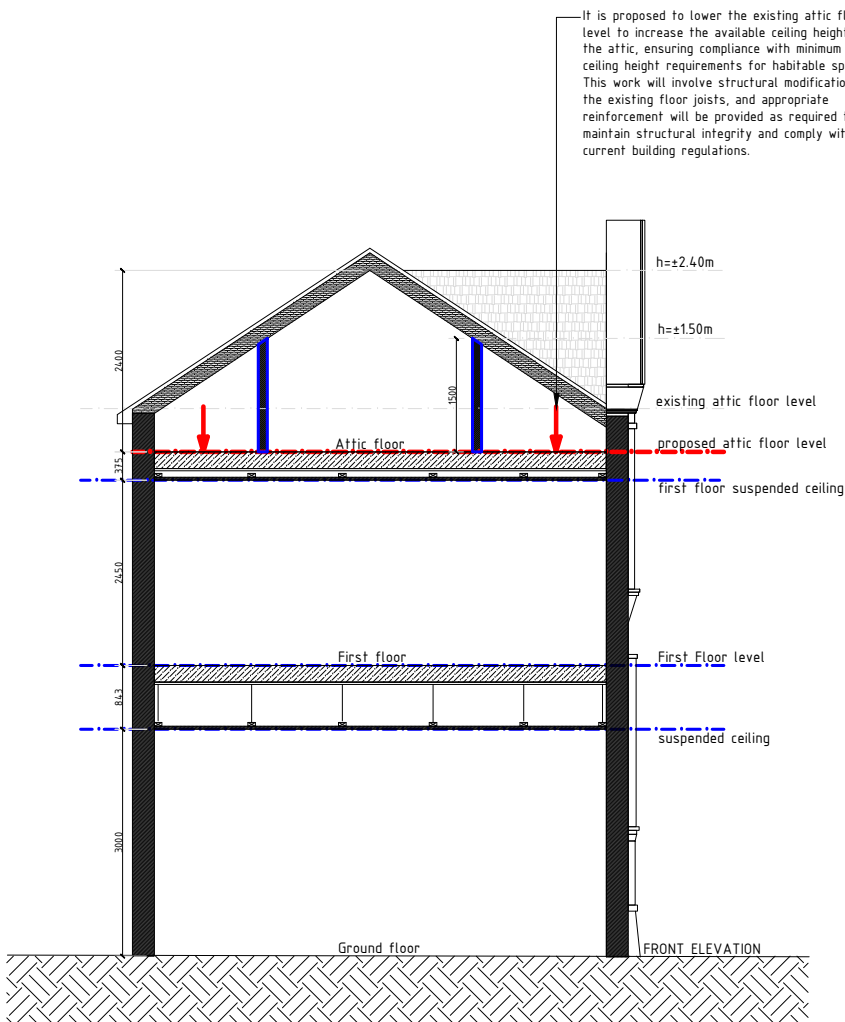

INTERNAL NOISE COMPLIANCE

This supporting statement has been prepared to confirm that the proposed conversion works will be undertaken to ensure full compliance with the internal noise requirements applicable to self-contained residential units. The works will be carried out under the supervision of an Approved Building Control Body, ensuring that all relevant provisions of Building Regulations Part E (Resistance to the Passage of Sound) are strictly adhered to.

As part of the conversion, a comprehensive and robust acoustic design strategy will be implemented. This will include, where required, enhanced sound insulation measures such as:

- Installation of independent acoustic stud walls incorporating high-density insulation.
- Use of resilient bar systems and acoustic plasterboard linings to reduce airborne noise transfer.
- Upgraded floor build-ups with acoustic separation layers and sound-attenuating materials to limit impact noise.

Sealing of all service penetrations and junctions using proprietary acoustic sealants in accordance with best-practice guidance. These measures, meticulously designed and implemented, will collectively ensure that the completed unit achieves or exceeds the minimum internal noise standards for residential accommodation, instilling confidence in their effectiveness.

In the UK, minimum internal noise standards for residential accommodation are generally taken from BS 8233:2014 – Guidance on Sound Insulation and Noise Reduction for Buildings and, where relevant, WHO Guidelines for Community Noise. These are not Building Regulations, but they are the benchmarks used by Environmental Health Officers and acoustic consultants.

Minimum Internal Noise Levels (BS 8233:2014)

1. Living Rooms (daytime 07:00–23:00) 35 dB LAeq,16hr
2. Bedrooms (night-time 23:00–07:00) 30 dB LAeq,8hr 45 dB LAFmax (for intermittent noise events such as traffic peaks)
3. Dining Rooms (daytime) 40 dB LAeq,16hr

These levels are designed to ensure that internal noise does not cause disturbance or sleep disruption.

These are effectively "maximum" internal noise transmission levels after conversion:

Airborne Noise Transmission $DnT,w + Ctr \geq 45$ dB (A lower figure means more noise passing through - therefore, 45 dB is the minimum acceptable insulation.)

Impact Noise Transmission $L'nT,w \leq 62$ dB (62 dB is the maximum allowable impact noise level penetrating floors.)

We note that, in addition to Building Control requirements, the Environmental Health Officer must be satisfied that acceptable internal noise levels can be achieved. To support this, a formal noise assessment will be commissioned and submitted. This report will provide measured and predicted noise levels, along with any additional mitigation recommendations deemed necessary to ensure full compliance with the relevant acoustic criteria.

This supporting statement is submitted to confirm our unwavering commitment to delivering a fully compliant, suitably sound-insulated residential unit that meets the expectations of both Building Control and Environmental Health, providing a sense of security in our dedication to quality.