


Pt100 series

$H = 1.0 \pm 0.1 \text{ mm}$ (Height)
 $L = 2.3 \pm 0.1 \text{ mm}$ (Length)
 $W = 2.0 \pm 0.1 \text{ mm}$ (Width)
 $LW = 10 \pm 1 \text{ mm}$ (Lead length)
 $L\phi = 0.2 \pm 0.02 \text{ mm}$ (Lead diameter)



*The nominal resistance measurement point is 8mm away from the component body

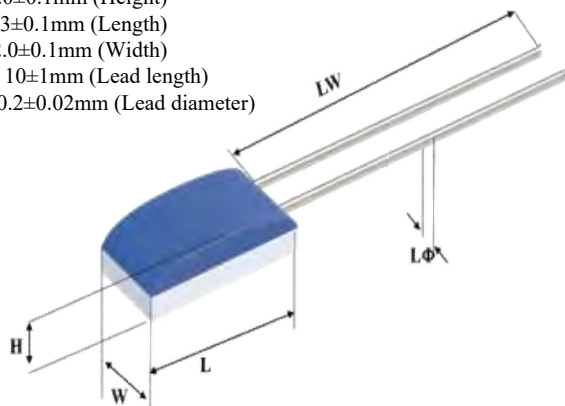

TECHNICAL INDEX

Performance parameters	Thin film platinum resistance series	Component size	2.0x2.3x1.0mm 1.6x2.0x1.0mm 1.2x2.0x1.0mm
Lead specifications	Length:10mm; Diameter:0.2mm	Lead material	Platinum nickel; Silver target; Pure Platinum; Sterling silver;
Lead tension	$\geq 9 \text{ N}$	Insulation impedance	$> 100 \text{ M}\Omega$ at 20°C 、 $> 2 \text{ M}\Omega$ at 500°C
Temperature coefficient (TCR)	3850ppm/ $^\circ\text{C}$	Working current	0.3- 1mA (Self-heating should be considered)
Long-term stability	After 1000 hours at 500°C , the resistance shift of $R(0^\circ\text{C})$ is less than 0.04%		
Response time	Water flow($v=0.4 \text{ m/s}$) $\tau_{0.5}=0.1 \text{ s}$ $\tau_{0.9}=0.3 \text{ s}$	Airflow($v=2 \text{ m/s}$) $\tau_{0.5}=5 \text{ s}$ $\tau_{0.9}=15 \text{ s}$	
Natural coefficient	0°C 0.4°C/mW	Anti-vibration	Frequency acceleration $\geq 40 \text{ g}$ from 10 to 2000Hz
Impact resistant	8ms half sine wave acceleration $\geq 100 \text{ g}$	Package	Vacuum plastic packaging (Provide other packaging forms as required)
Others	Substrate size, basic resistance value, lead specifications (can be provided upon request)		



REFERENCE SELECTION

Type	Range of application	Classes	$R_0(\Omega)$	Temperature range	Accuracy
Pt100-N500	$-70 \sim +500^\circ\text{C}$	1/10B	100 ± 0.01	$0 \sim +100^\circ\text{C}$	$\pm(0.03+0.0005 T)$
		1/3B	100 ± 0.04	$0 \sim +150^\circ\text{C}$	$\pm(0.1+0.0017 T)$
		A	100 ± 0.06	$-50 \sim +300^\circ\text{C}$	$\pm(0.15+0.002 T)$
		B	100 ± 0.12	$-70 \sim +500^\circ\text{C}$	$\pm(0.3+0.005 T)$
		2B	100 ± 0.24	$-70 \sim +500^\circ\text{C}$	$\pm(0.6+0.01 T)$
Pt100-GW650	$-70 \sim +650^\circ\text{C}$	B	100 ± 0.12	$-70 \sim +650^\circ\text{C}$	$\pm(0.3+0.005 T)$
		2B	100 ± 0.24	$-70 \sim +650^\circ\text{C}$	$\pm(0.6+0.01 T)$
Pt100-DW200	$-200 \sim +150^\circ\text{C}$	B	100 ± 0.12	$-200 \sim +150^\circ\text{C}$	$\pm(0.3+0.005 T)$
		2B	100 ± 0.24	$-200 \sim +150^\circ\text{C}$	$\pm(0.6+0.01 T)$

Note * : the marked classes and temperature measurement accuracy refer to the IEC60751 standard. T is the measured temperature.

MAIN FEATURES

- PT100 series thin film platinum resistors have the advantages of small size, high precision and good long-term stability.
- It has the characteristics of anti-vibration and anti-shock.
- The product can be subdivided into regular ultra low and high temperature series, covering the temperature range of -200 to 650°C .
- It can be used in many connection ways, such as resistance welding, argon arc welding, pressure welding, brazing and so on.
- Widely used in automotive, instrumentation, household appliances, new energy and other fields.