



POWER — USB-C 5 V in, TVS, 3.3 V LDO

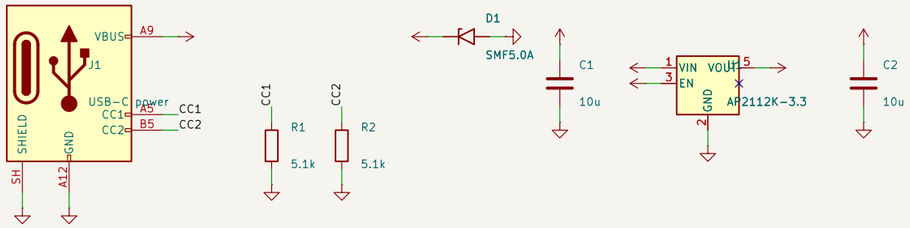


SENSORS — VOC (SGP40), RH/T (SHT40), CO2 (SCD41)

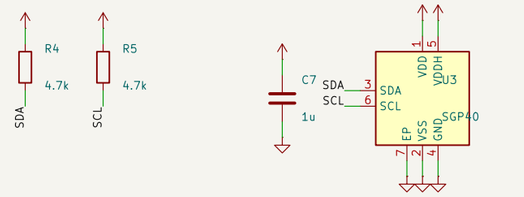




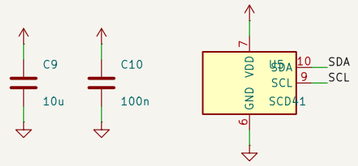


ALARM — 4 kHz 100 dB sounder, low-side switch









MCU — ATmega328P, internal 8 MHz

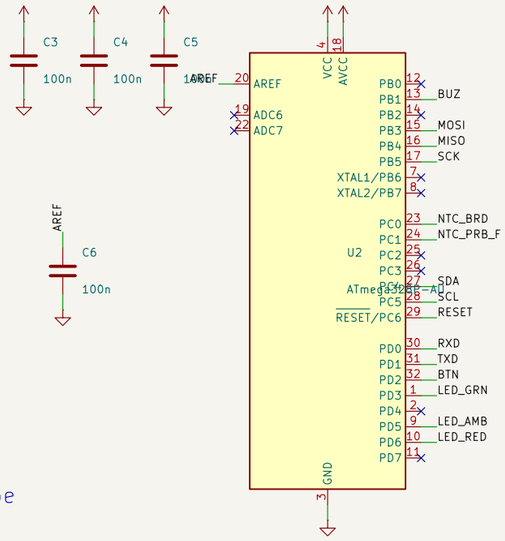


TEMPERATURE — thermal-tab NTC + optional probe

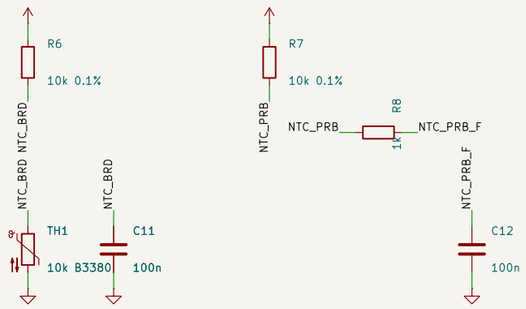


INDICATION & TEST/HUSH

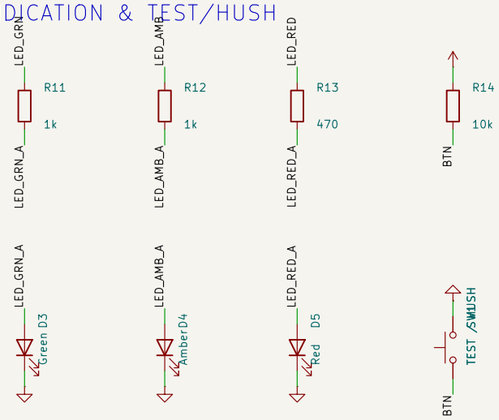

PROGRAMMING (Tag-Connect TC2030) & TEST PADS

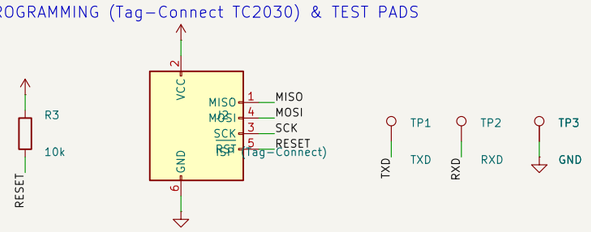

MECHANICAL



CERN-OHL-S v2
Generated by src/schematic.py from src/circuit.py — edit the script, not this file
OffGrid Devices
Sheet: /
File: canary.kicad_sch

Title: Canary — first-vent detector for lithium batteries

Size: A3	Date: 2026-10-14	**Rev: v1**
KiCad E.D.A. 10.0.6		Id: 1/1