
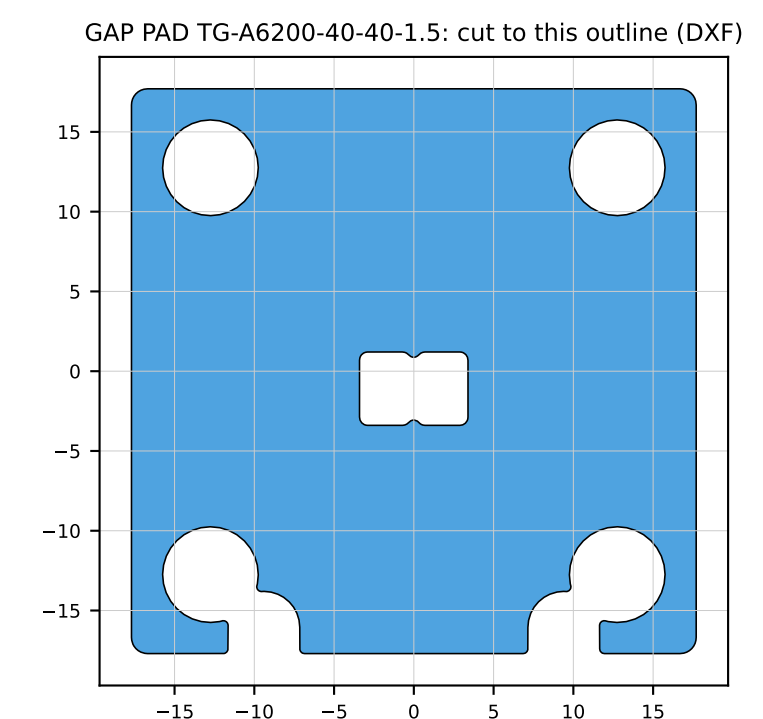
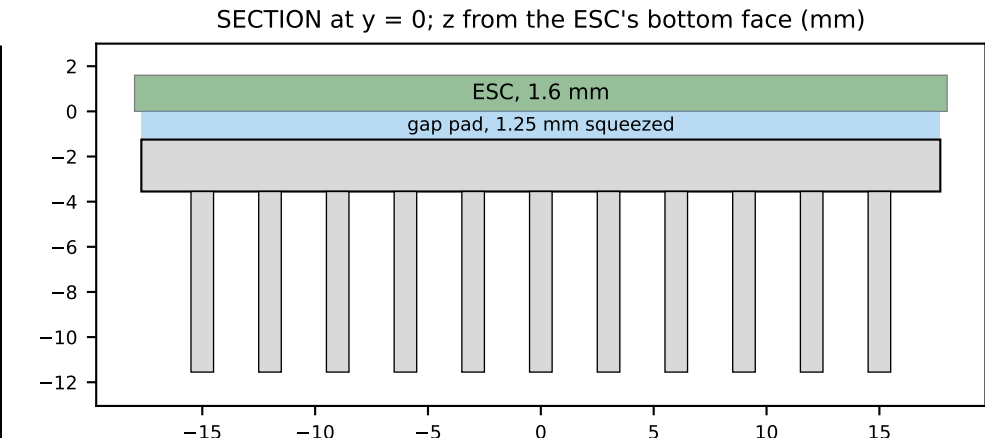
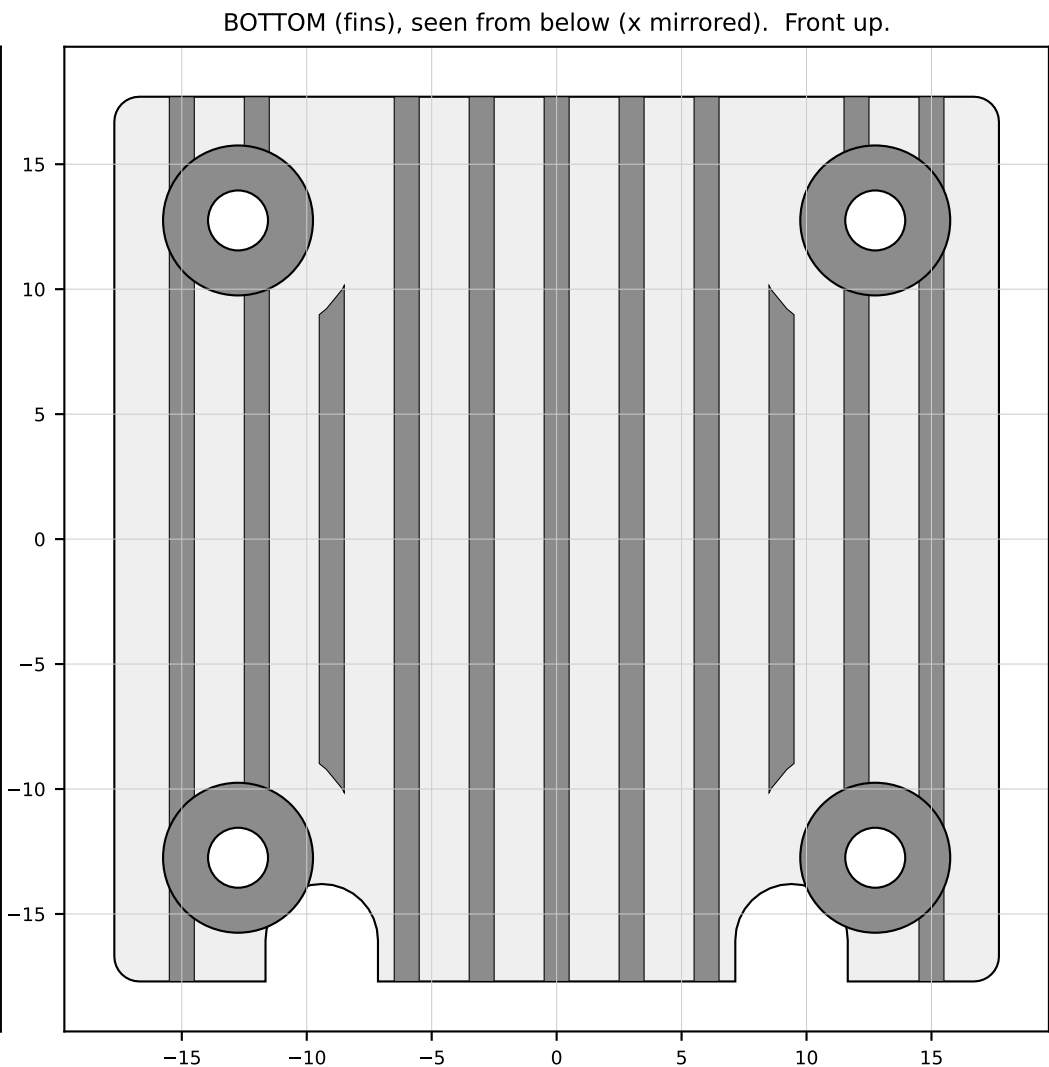


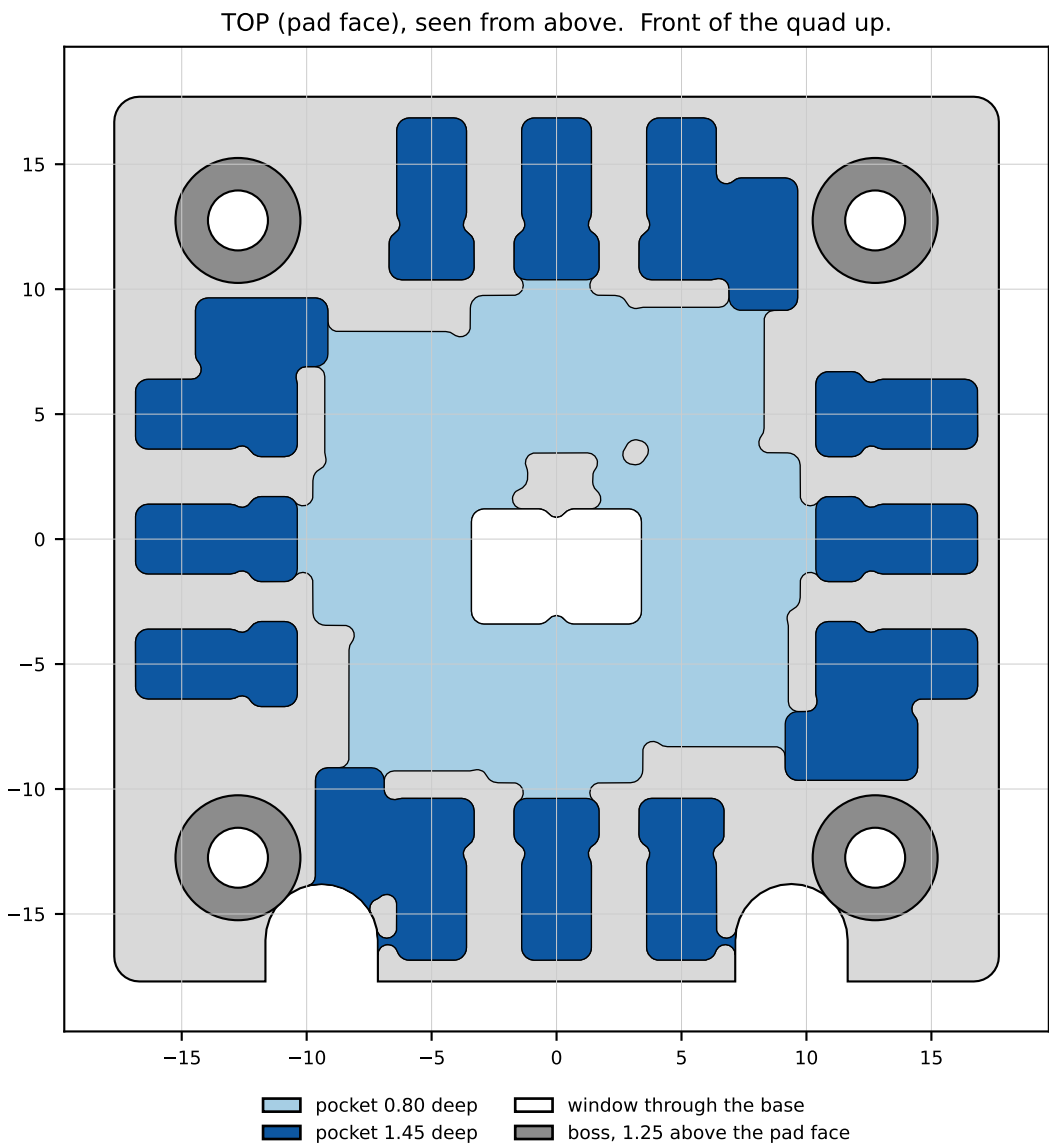

Ridge 3 ESC heatsink. Aluminium 6061-T6, black anodized (Type II). The STEP (ridge3-esc-heatsink.step) is the master; this sheet gives what needs a drawing.

Outline 35.4 x 35.4 mm, R1.0 corners. Base 2.30 mm. Fins 1.0 thick, 2.0 slots, 8.0 tall, along the front-rear axis. Bosses Ø5.0 stand 1.25 above the pad face; feet Ø6.0 flush with the fin tips; holes Ø2.4 through.

Pockets (one per part on the ESC's bottom, merged where the metal between would be under 0.8 mm; inside corners R0.5): window through the base: (C2, C3); pocket 1.45 deep, pad over: (C15, C16, C17, C27, C28, C29, C39, C40, C41, C51, C52, C53, Q1AL, Q1BL, Q1CL, Q2AL, Q2BL, Q2CL, Q3AL, Q3BL, Q3CL, Q4AL, Q4BL, Q4CL, R_SH1, R_SH2, R_SH3, R_SH4); pocket 0.80 deep, pad over: (C5, D_EN, U_ESC1, U_ESC2, U_ESC3, U_ESC4, U_GD1, U_GD2, U_GD3, U_GD4).

TOLERANCES: ISO 2768-m unless stated. Boss top faces to the pad face: 1.25 +/-0.05 (sets the pad's squeeze). Pad face flatness 0.05. Pocket depths +0.1/-0.

FINISH: black anodize (Type II) all over; boss tops and feet may be left bare (rack points). Break sharp edges 0.2.

GAP PAD: T-Global Technology TG-A6200-40-40-1.5 (DigiKey 1168-TG-A6200-40-40-1.5-ND): TG-A6200, 6.2 W/m K, 50 Shore 00, -50..180 C, >= 10 kV/mm, 40 x 40 mm sheet: cut to the outline in the DXF. Squeezed 1.5 -> 1.25 mm (17 %, about 18 psi on the maker's chart, about 130 N on the board): 0.65 C in2/W.

MASS: plate 14.5 g (from the model), pad 5.0 g. The stack stands 11.6 mm higher on the frame (pad, base, fins).