


SECTION 1 — MODEL DESCRIPTION

BUILDING DESCRIPTION	
Sector	Residential
Building Type	Single Family
Building Sub Type	Detached
Vintage	1985-2012

3D MODEL

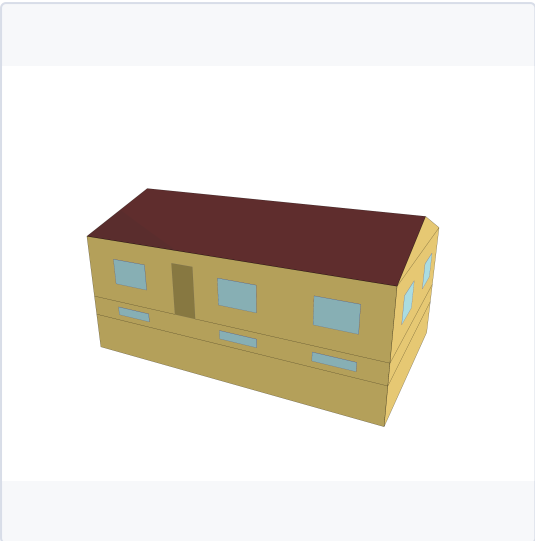

Three-dimensional geometric representation of the building model used for energy simulation and performance analysis.

BUILDING CHARACTERISTICS	
Floor Area	270.0 m²
Climate Zone	6A
Weather	outdoor_temperature_no_year
HVAC System	Unknown HVAC System

ENVELOPE	
INSULATION & AIR TIGHTNESS	
Walls Ext [W/m2-K]	0.48
Walls Int [W/m2-K]	0
Roof [W/m2-K]	4.16
Slabs [W/m2-K]	0
Infiltration [m³/h-m²]	0
GLAZING	
Glazing [W/m2-K]	2.94
SHGC	0.6
WWR	
Average	13.02

ENERGY USE INTENSITY

80.7

kWh/m²/yr

TOTAL CONSUMPTION

21786.0

kWh/yr

ELECTRICITY

21786.0

kWh/yr


NATURAL GAS

0

kWh/yr


ANNUAL END USES — ELECTRICITY [KWH]	
END USE	KWH/YR
Heating	10241.7
Cooling	483.3
Interior Lighting	444.4
Exterior Lighting	122.2
Interior Equipment	10455.6
Fans	36.1
Total End Uses	21786.3

MONTHLY CONSUMPTION BY END USE

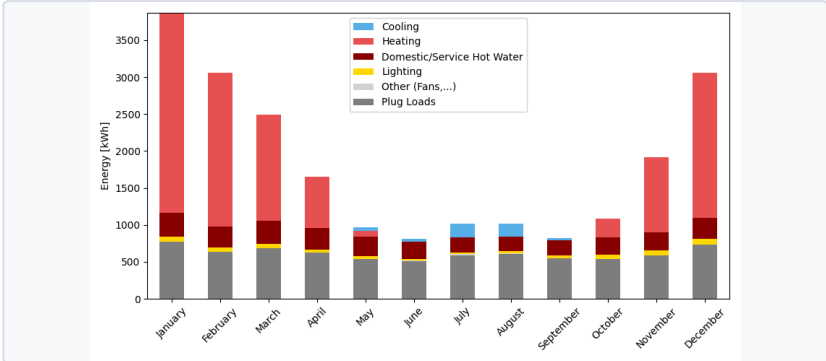


Monthly energy consumption breakdown by end use, showing the contribution of heating, cooling, lighting, domestic hot water, plug loads, and auxiliary systems throughout the year.

TYPICAL DAILY CONSUMPTION - WINTER

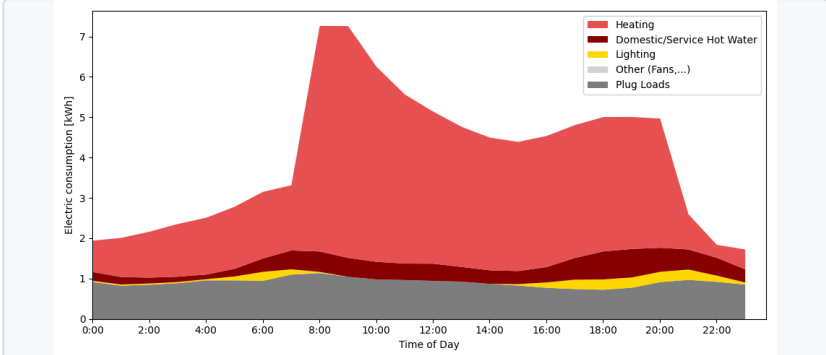


Stacked daily winter energy consumption profile showing the contribution of heating, lighting, domestic hot water, plug loads, and auxiliary systems throughout a typical winter day.

TYPICAL DAILY CONSUMPTION - SUMMER

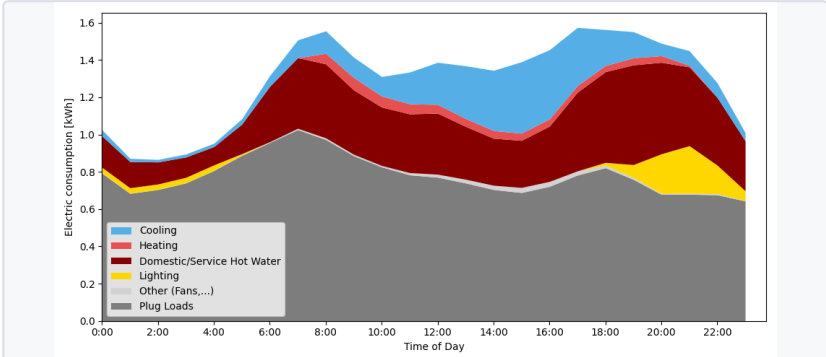


Stacked daily summer energy consumption profile showing the contribution of cooling, lighting, domestic hot water, plug loads, and auxiliary systems throughout a typical summer day.

TYPICAL DAY — WINTER

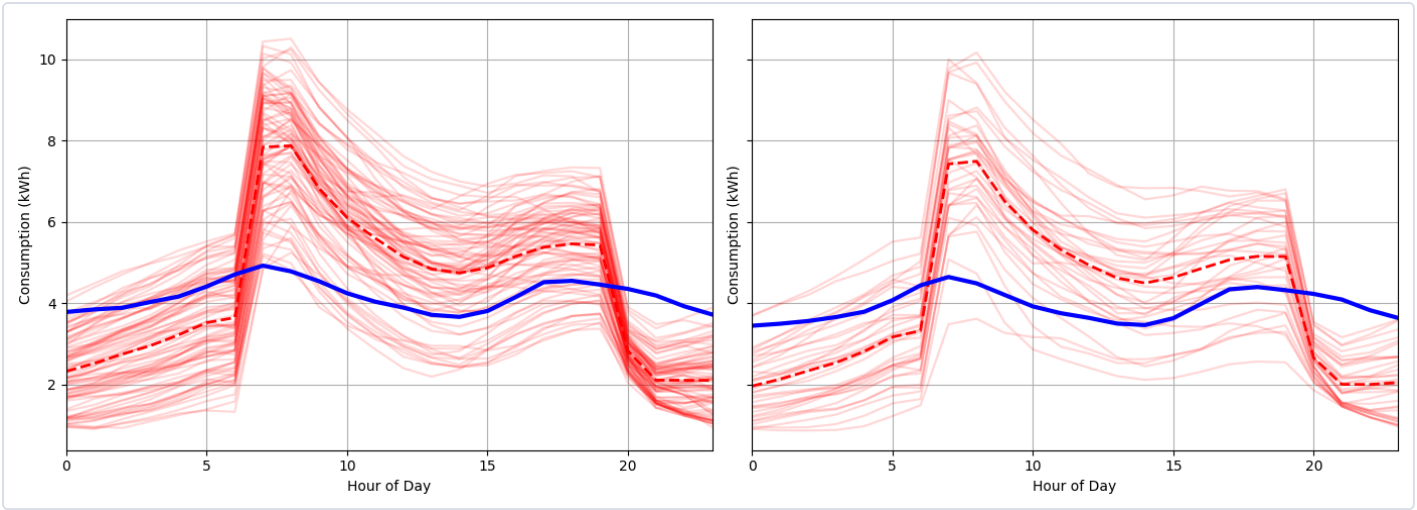

Winter daily consumption profile comparing simulated and measured hourly energy use. Red lines represent individual winter days from the model, the red dashed line indicates the average simulated profile, and the blue line shows measured data for comparison. The left plot represents weekdays, while the right plot represents weekends.


TYPICAL DAY — SUMMER

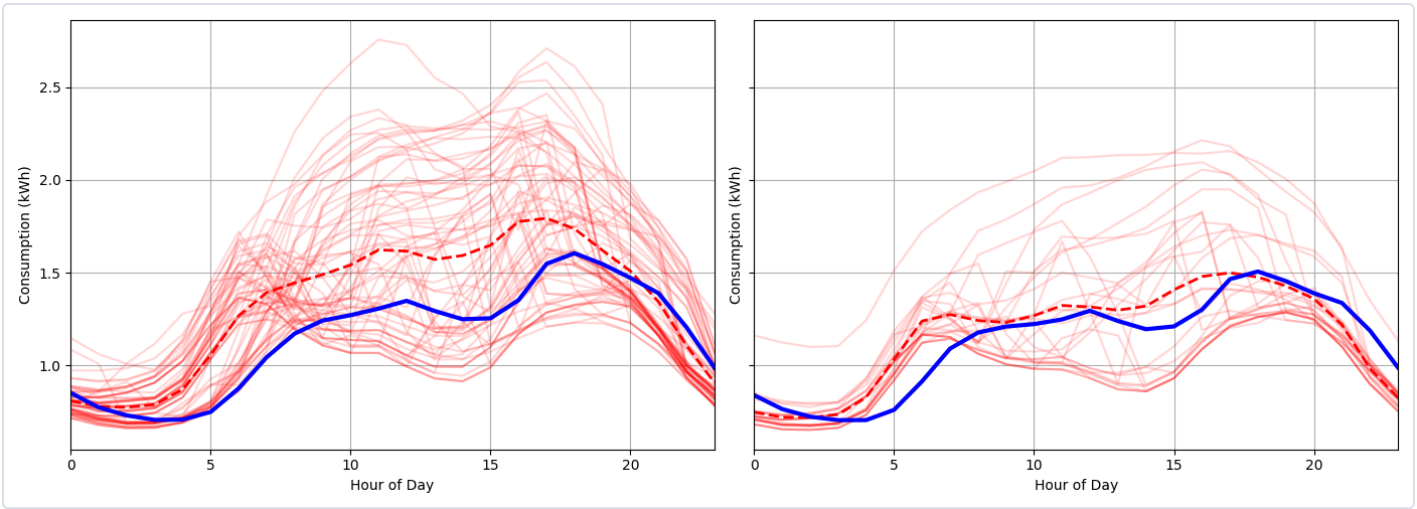

Summer daily consumption profile comparing simulated and measured hourly energy use. Red lines represent individual winter days from the model, the red dashed line indicates the average simulated profile, and the blue line shows measured data for comparison. The left plot represents weekdays, while the right plot represents weekends.

SECTION 3 — COMPARISON WITH REFERENCE DATA

PRISM CURVE

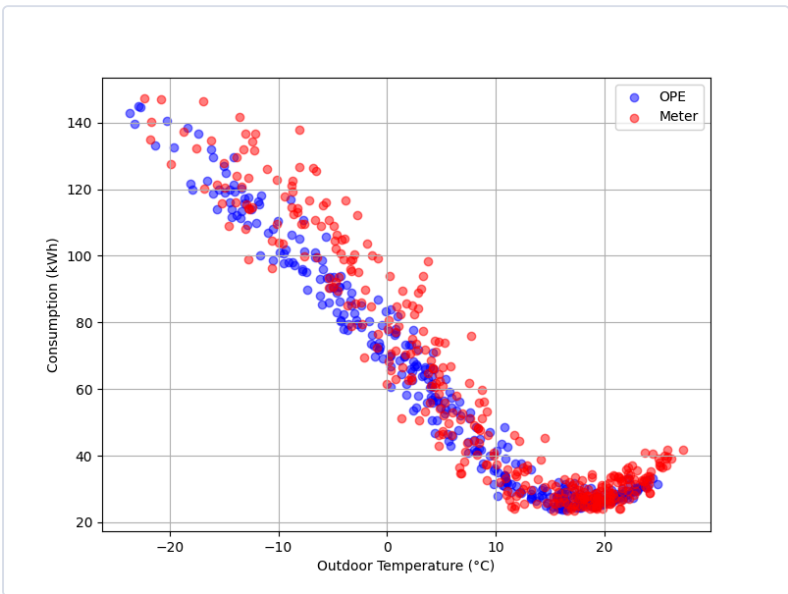

PRISM curve comparing simulated (OPE) and measured energy consumption as a function of outdoor temperature, illustrating the relationship between weather conditions and building energy demand across the year.

COMPARISON TABLE — KEY INDICATORS

INDICATOR	MODEL	REFERENCE	DELTA
Conso_annuelle_electricite_kWh	21785.52	20983.84	801.7
Conso_base_electricite_kWhParJour	27.86	26.63	1.2
Pente_chauffage_electricite_WparK	-147.33	-136.0	-11.3
Pente_climatisation_electricite_WparK	74.92	52.56	22.4
Pointe_hiver_am_kW	10.5	7.06	3.4
Pointe_h_hiver_am	8.0	7.0	1.0
Pointe_hiver_pm_kW	7.61	6.51	1.1
Pointe_h_hiver_pm	12.0	17.0	-5.0