


Slim5

Precision Chuck APC, DIN ISO 26623-1

with fine balancing holes 6xM6

Slim line with 4,5° especially for 5-axis operations. Easy exchange of tools by setting of hex-key (see page 49). Maintenance free. Sealed against coolant and contamination. Slow collet taper angle. Collet with special coating (see page 36–47). System-Runout-Accuracy 3 µm at 2,5 x D. Clamping of tool shanks according to DIN 1835 A, B and DIN 6535 HB, HA.

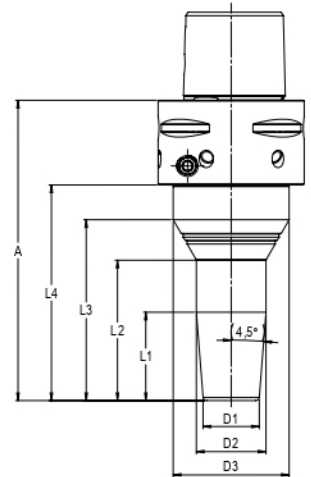

APC 14 Slim5

PSC 63 Slim5

2 – 14 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
108	300 414Z 9C6 0	A		38	56	71	24	30	50	20.000 G=2,5	1,5
130	300 414Z 9C6 1	A	38	61	78	93	24	30	50	20.000 G=2,5	1,6
166	300 414Z 9C6 2	A	38	85	103	129	24	30	50	20.000 G=2,5	1,9



APC 20 Slim5

PSC 63 Slim5

2 – 20 mm

A	Part.No.	Form	L1	L2	L3	L4	D1	D2	D3	Balanced	kg
108	300 420Z 9C6 0	A		44	54	71	32	39	50	20.000 G=2,5	1,6
130	300 420Z 9C6 1	A	51	69	78	93	32	40	50	20.000 G=2,5	1,7
166	300 420Z 9C6 2	A	51	94	103	129	32	40	50	20.000 G=2,5	2,1

