



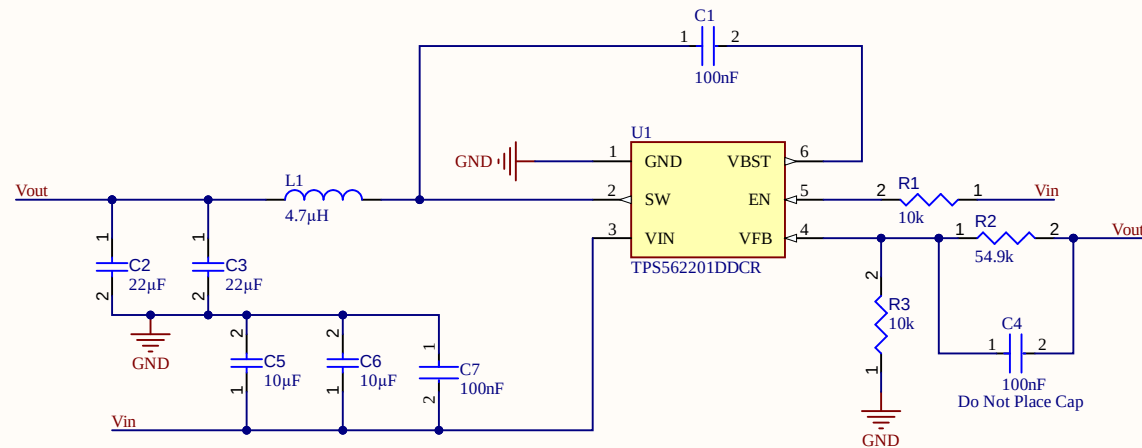

12V -> 5V Buck Converter

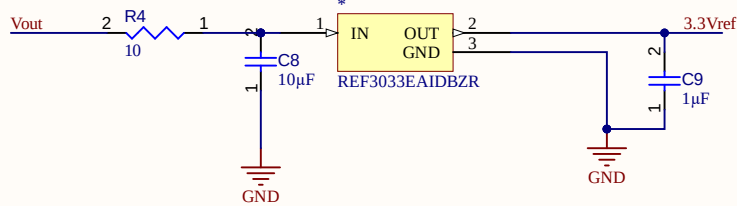

3.3V Voltage Reference IC

Title Buck + 3.3V Ref IC			
Size A4	Number TBD	Revision A	
Date:	9-16-2026	Sheet of	
File:	C:\Users\...\DC_DC_Buck.SchDoc	Drawn By:	Henry King

Line #	Name	Description	Designator	Quantity	Manufacturer 1	Manufacturer Part Number 1	Manufacturer Lifecycle 1	Supplier 1	Supplier Part Number 1	Supplier Unit Price 1	Supplier Subtotal 1
	REF3033E AIDBZR	15 ppm°/C drift, 27uA/Iq in SOT-23-3 package series voltage reference 3- SOT-23-40 to 125		1							
	Capacitor 100nF 0603	100V 100nF X7R ±10% 0603 Multilayer Ceramic Capacitors MLCC - SMD/SMT ROHS	C1, C4, C7	3							
	22uf Capacitor 1206	CAP CER 22UF 25V XSR 1206 / High Value Multilayer Ceramic Capacitors (High dielectric type)	C2, C3	2							
	CL21B10 6K0QNN NE	16V 10uF X7R ±10% 0805 Multilayer Ceramic Capacitors MLCC - SMD/SMT ROHS	C5, C6, C8	3							
	Capacitor 1uF +/- 10% 16V 0603	Chip Capacitor, 1 uF, +/- 10%, 16 V, 0603 (1608 Metric)	C9	1							
	LMLP050 6M4R7DT AS	Inductor Power Wirewound 4.7uH 20% 100K-hz Ferrite 3.5A 77.5mOhm DCR	L1	1							
	Resistor 10k +/-1% 0603 100 mW	Chip Resistor, 10 KOhm, +/- 1%, 01 W, -55 to 155 degC, 0603 (1608 Metric)	R1, R3	2							
	54.9kohm 0603 Resistor	Res Thick Film 0603 54.9K Ohm 1% 0.1W(1/10W) ±100ppm/C Pad SMD Automotive T/R	R2	1							
	Resistor 10R +/-1 % 0402 63 mW	Chip Resistor, 10 Ohms, +/-1 %, 63 mW, -55 to 155 degC, 0402	R4	1							
	TPS56220 1DDCR	Buck 580KHz Adjustable SOT-23-THIN SMD mount 1.1mm(height)	U1	1							