



AD8237 | EIGHT I2C GAINS | REV C

ANALOG POWER: 3.3 V nominal / 5 V option

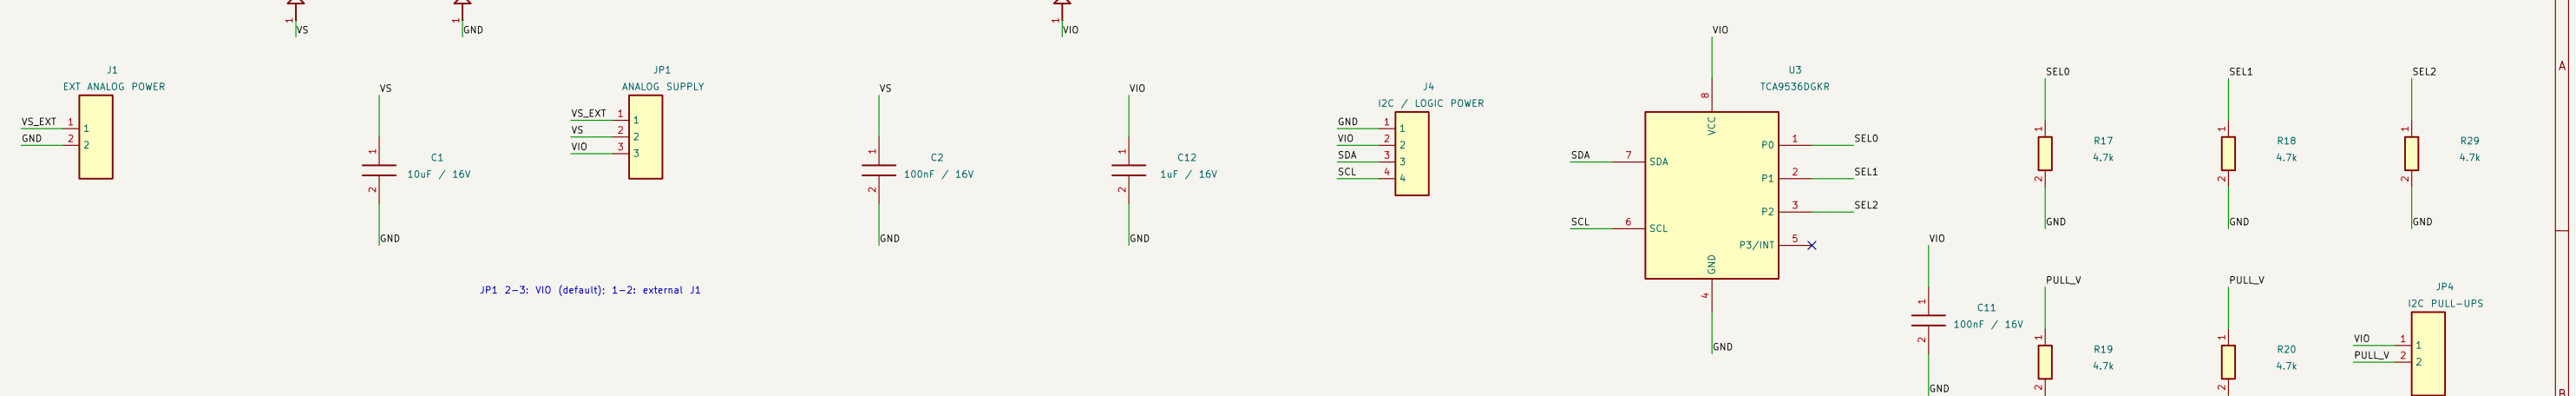


ANALOG SIGNAL PATH

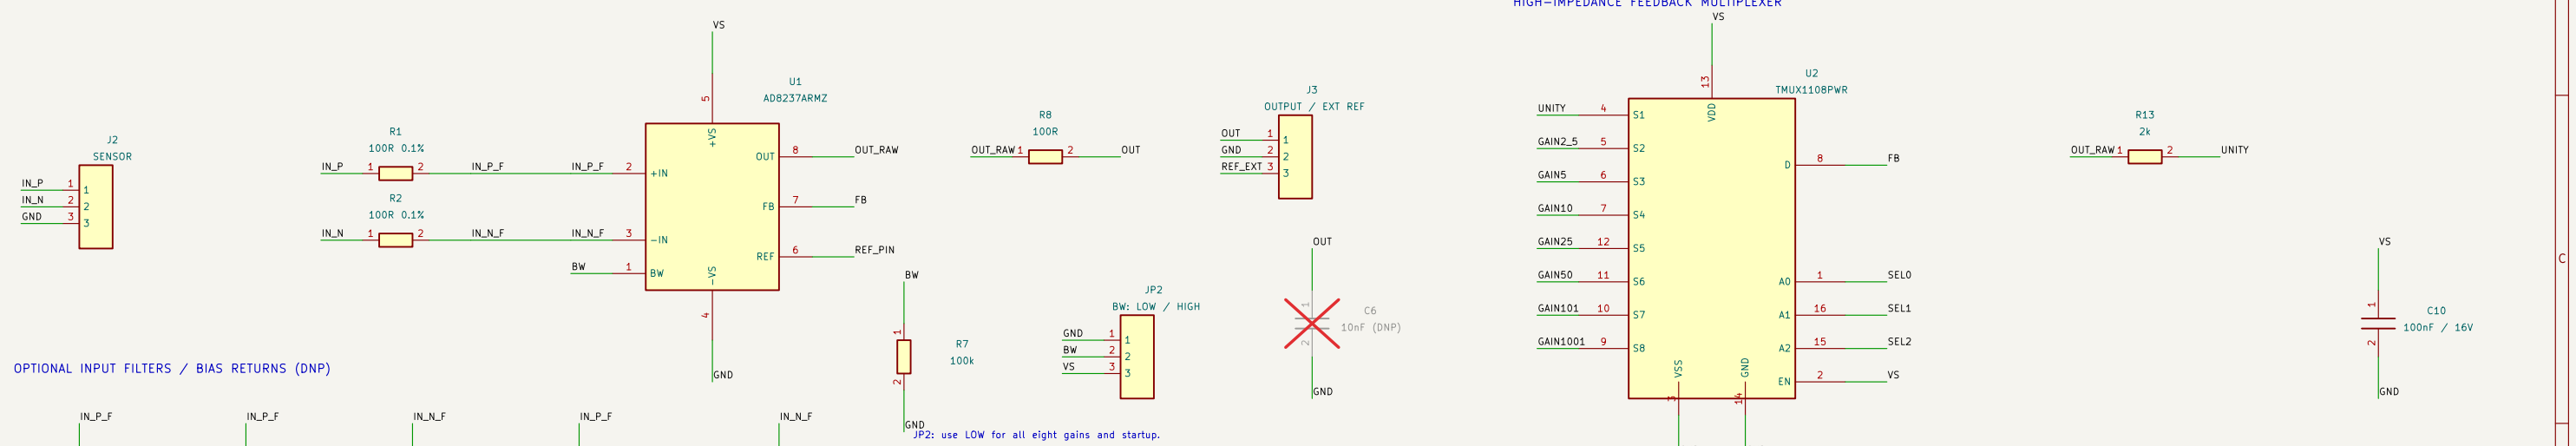

OPTIONAL INPUT FILTERS / BIAS RETURNS (DNP)



BUFFERED HALF-SUPPLY REFERENCE

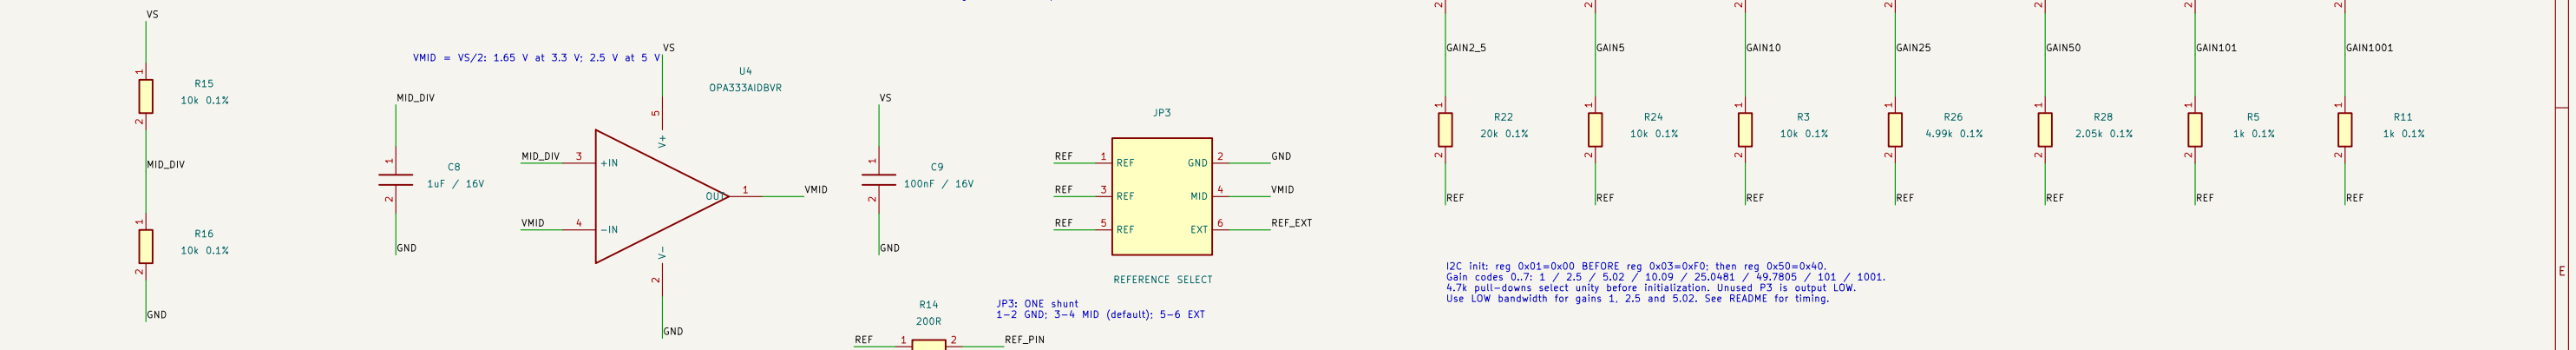

TEST POINTS



VOUT_RAW = VREF + G x (VIN+ - VIN-). REF source drives ALL divider returns.
C3-C6 and R9/R10 are DNP. C7 is FITTED. Change supply/reference jumpers with power off.
Keep sensor, reference and output voltages within analog supply rails. Host VIO and analog VS may differ.
Power-up: unity, LOW bandwidth, MID reference. Wait 50 ms after power-up; discard samples after gain changes.

Eight I2C gains Buffered midsupply 3.3 / 5 V 60 x 50 mm Prototype		
Micro-DMM		
Sheet: /		
File: AD8237DevBoard.kicad_sch		
Title: AD8237 Sensor Development Board		
Size: A3	Date: 2026-09-20	Rev: C
KiCad E.D.A. 10.0.0		Id: 1/1