


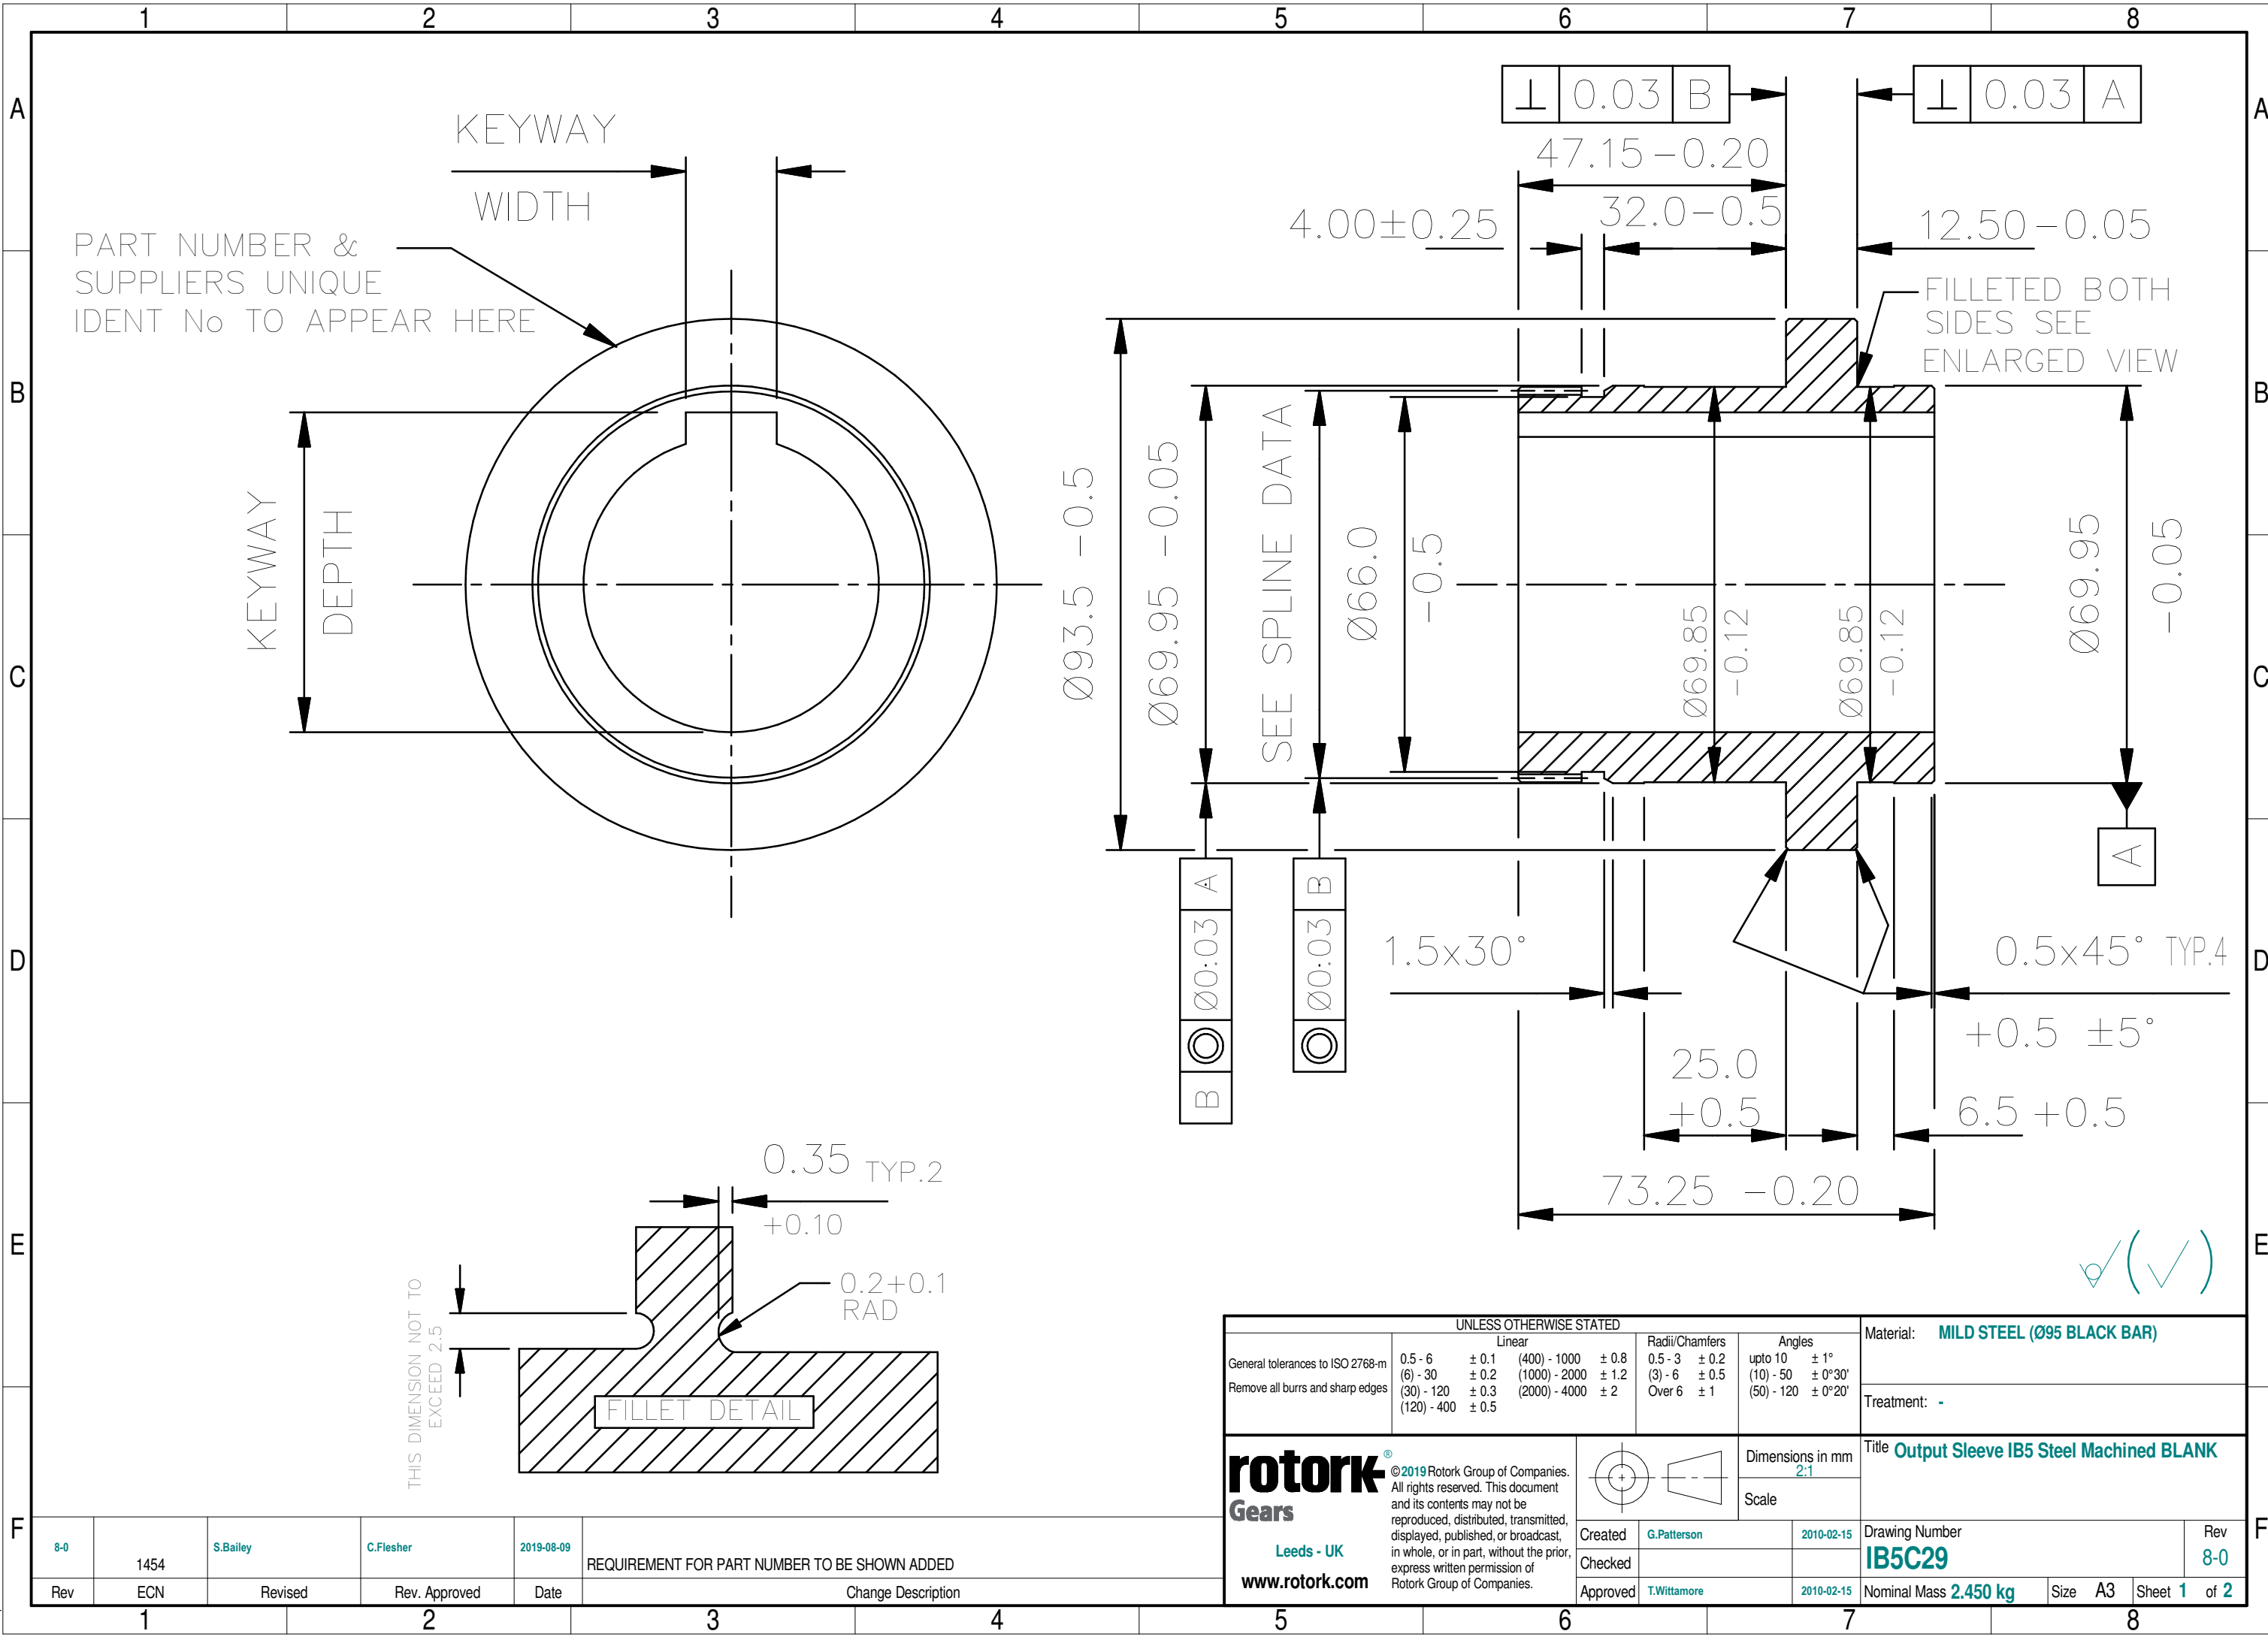

Template Issue - 2019-05-22

8-0	1454	S.Bailey	C.Flesher	2019-08-09	REQUIREMENT FOR PART NUMBER TO BE SHOWN ADDED
Rev	ECN	Revised	Rev. Approved	Date	Change Description

UNLESS OTHERWISE STATED						Material: MILD STEEL (Ø95 BLACK BAR)		
General tolerances to ISO 2768-m Remove all burrs and sharp edges	Linear		Radii/Chamfers		Angles	Treatment: -		
	0.5 - 6	± 0.1	(400) - 1000	± 0.8	upto 10 ± 1°			
	(6) - 30	± 0.2	(1000) - 2000	± 1.2	(10) - 50 ± 0°30'			
	(30) - 120	± 0.3	(2000) - 4000	± 2	(50) - 120 ± 0°20'			
		(120) - 400	± 0.5	Over 6	± 1			
rotork® Gears ©2019 Rotork Group of Companies. All rights reserved. This document and its contents may not be reproduced, distributed, transmitted, displayed, published, or broadcast, in whole, or in part, without the prior, express written permission of Rotork Group of Companies. Leeds - UK www.rotork.com						Title Output Sleeve IB5 Steel Machined BLANK		
						Dimensions in mm 2:1		
						Scale		
Created G.Patterson						2010-02-15		
Checked								
Approved T.Wittmore						2010-02-15		
Drawing Number IB5C29						Rev 8-0		
Nominal Mass 2.450 kg						Size A3 Sheet 1 of 2		

1				2				3				4				5				6				7				8												
A	100				SCREW 2" ACME, L.H., 1/2" PITCH, SINGLE START				65																															
	32				Y	1.375" +0.002"	0.375" +0.001"	1.483" +0.006"	64																															
	31				Y	25.00 +0.05	7.98 +0.04	28.30 +0.20	63																															
	30				N	1.625" +0.002"	0.375" +0.001"	1.792" +0.006"	62																															
	29				Y	26.00 +0.05	7.98 +0.04	29.30 +0.20	61				Y	40.03 +0.03	9.98 +0.04	43.66 +0.20																								
	28				Y	1.875" +0.002"	0.500" +0.001"	2.100" +0.006"	60				Y	45.03 +0.03	13.98 +0.04	48.80 +0.20																								
	27				Y	1.000" +0.002"	0.250" +0.001"	1.115" +0.006"	59				N	1.866" +0.002"	0.500" +0.002"	2.086" +0.010"																								
	26				Y	1.376" +0.002"	0.375" +0.001"	1.544" +0.006"	58				N	1.876" +0.002"	0.500" +0.002"	2.096" +0.010"																								
	25				N	38.05 +0.05	11.98 +0.04	41.30 +0.20	57				Y	30.02 +0.03	7.98 +0.04	33.30 +0.20																								
	24				N	1.625" +0.002"	0.500" +0.002"	1.840" +0.006"	56				Y	40.03 +0.03	11.98 +0.04	43.30 +0.20																								
	23				Y	45.00 +0.05	13.98 +0.04	48.80 +0.20	55				N	1.628" +0.005"	0.252" +0.003"	1.735" +0.005"																								
	22				Y	1.250" +0.002"	0.312" +0.001"	1.362" +0.006"	54				Y	40.00 +0.04	11.98 +0.04	43.30 +0.20																								
	21				Y	1.752" +0.002"	0.438" +0.001"	1.947" +0.006"	53				Y	20.00 +0.04	5.98 +0.04	22.80 +0.10																								
	20				Y	35.00 +0.04	9.98 +0.04	38.30 +0.20	52				Y	30.50 +0.04	9.98 +0.04	33.80 +0.20																								
	19				Y	1.500" +0.002"	0.375" +0.001"	1.608" +0.006"	51				Y	17.00 +0.03	4.98 +0.04	19.30 +0.10																								
	B	18				DRILL Ø20 PILOT BORE				50				N	42.05 +0.05	13.98 +0.04	45.85 +0.25																							
17				Y	1.250" +0.002"	0.312" +0.001"	1.394" +0.006"	49				Y	2.002" +0.002"	0.500" +0.001"	2.226" +0.008"																									
16				Y	1.437" +0.002"	0.375" +0.001"	1.606" +0.006"	48				Y	22.05 +0.05	5.98 +0.04	24.85 +0.15																									
15				DRILL 1/2" DIA PILOT BORE				47				Y	31.00 +0.05	9.98 +0.04	34.30 +0.20																									
14				Y	1.750" +0.002"	0.438" +0.001"	1.885" +0.006"	46				Y	1.939" +0.002"	0.500" +0.001"	2.163" +0.006"																									
13				N	25.40 +0.05	6.00 +0.03	28.20 +0.10	45				Y	42.00 +0.05	11.98 +0.04	45.30 +0.20																									
12				Y	2.000" +0.002"	0.500" +0.001"	2.131" +0.006"	44				N	50.80 +0.05	13.98 +0.04	54.60 +0.20																									
11				Y	40.00 +0.04	11.98 +0.04	43.30 +0.20	43				N	45.00 +0.05	7.98 +0.04	48.30 +0.20																									
10				Y	30.00 +0.04	7.98 +0.04	33.30 +0.20	42				Y	47.63 +0.05	13.98 +0.04	51.43 +0.20																									
9				Y	52.00 +0.05	15.98 +0.04	56.30 +0.20	41				Y	41.28 +0.05	11.98 +0.04	44.58 +0.20																									
8				Y	50.00 +0.04	13.98 +0.04	53.80 +0.20	40				N	0.750" +0.002"	0.250" +0.001"	0.865" +0.006"																									
7				Y	34.00 +0.04	9.98 +0.04	37.30 +0.20	39				N	1.750" +0.002"	0.250" +0.001"	1.895" +0.010"																									
6				Y	38.00 +0.04	9.98 +0.04	41.30 +0.20	38				N	50.00 +0.05	11.98 +0.04	53.30 +0.20																									
5				Y	36.00 +0.04	9.98 +0.04	39.30 +0.20	37				N	2.000" +0.002"	0.625" +0.001"	2.185" +0.006"																									
4				Y	32.00 +0.04	9.98 +0.04	35.30 +0.20	36				N	1.377" +0.002"	0.313" +0.002"	1.520" +0.010"																									
C		3				Y	48.00 +0.04	13.98 +0.04	51.80 +0.20	35				N	52.00 +0.05	17.98 +0.04	56.45 +0.20																							
	2				Y	1.875" +0.002"	0.500" +0.001"	2.006" +0.006"	34				N	1.750" +0.002"	0.375" +0.002"	1.922" +0.006"																								
	1				Y	44.00 +0.04	12.00 +0.12	47.30 +0.20	33				Y	1.500" +0.002"	0.375" +0.001"	1.669" +0.006"																								
	REF				B.S.	BORE	KEYWAY WIDTH	KEYWAY DEPTH	REF				B.S.	BORE	KEYWAY WIDTH	KEYWAY DEPTH																								
	D																																							
E																																								
F																																								