
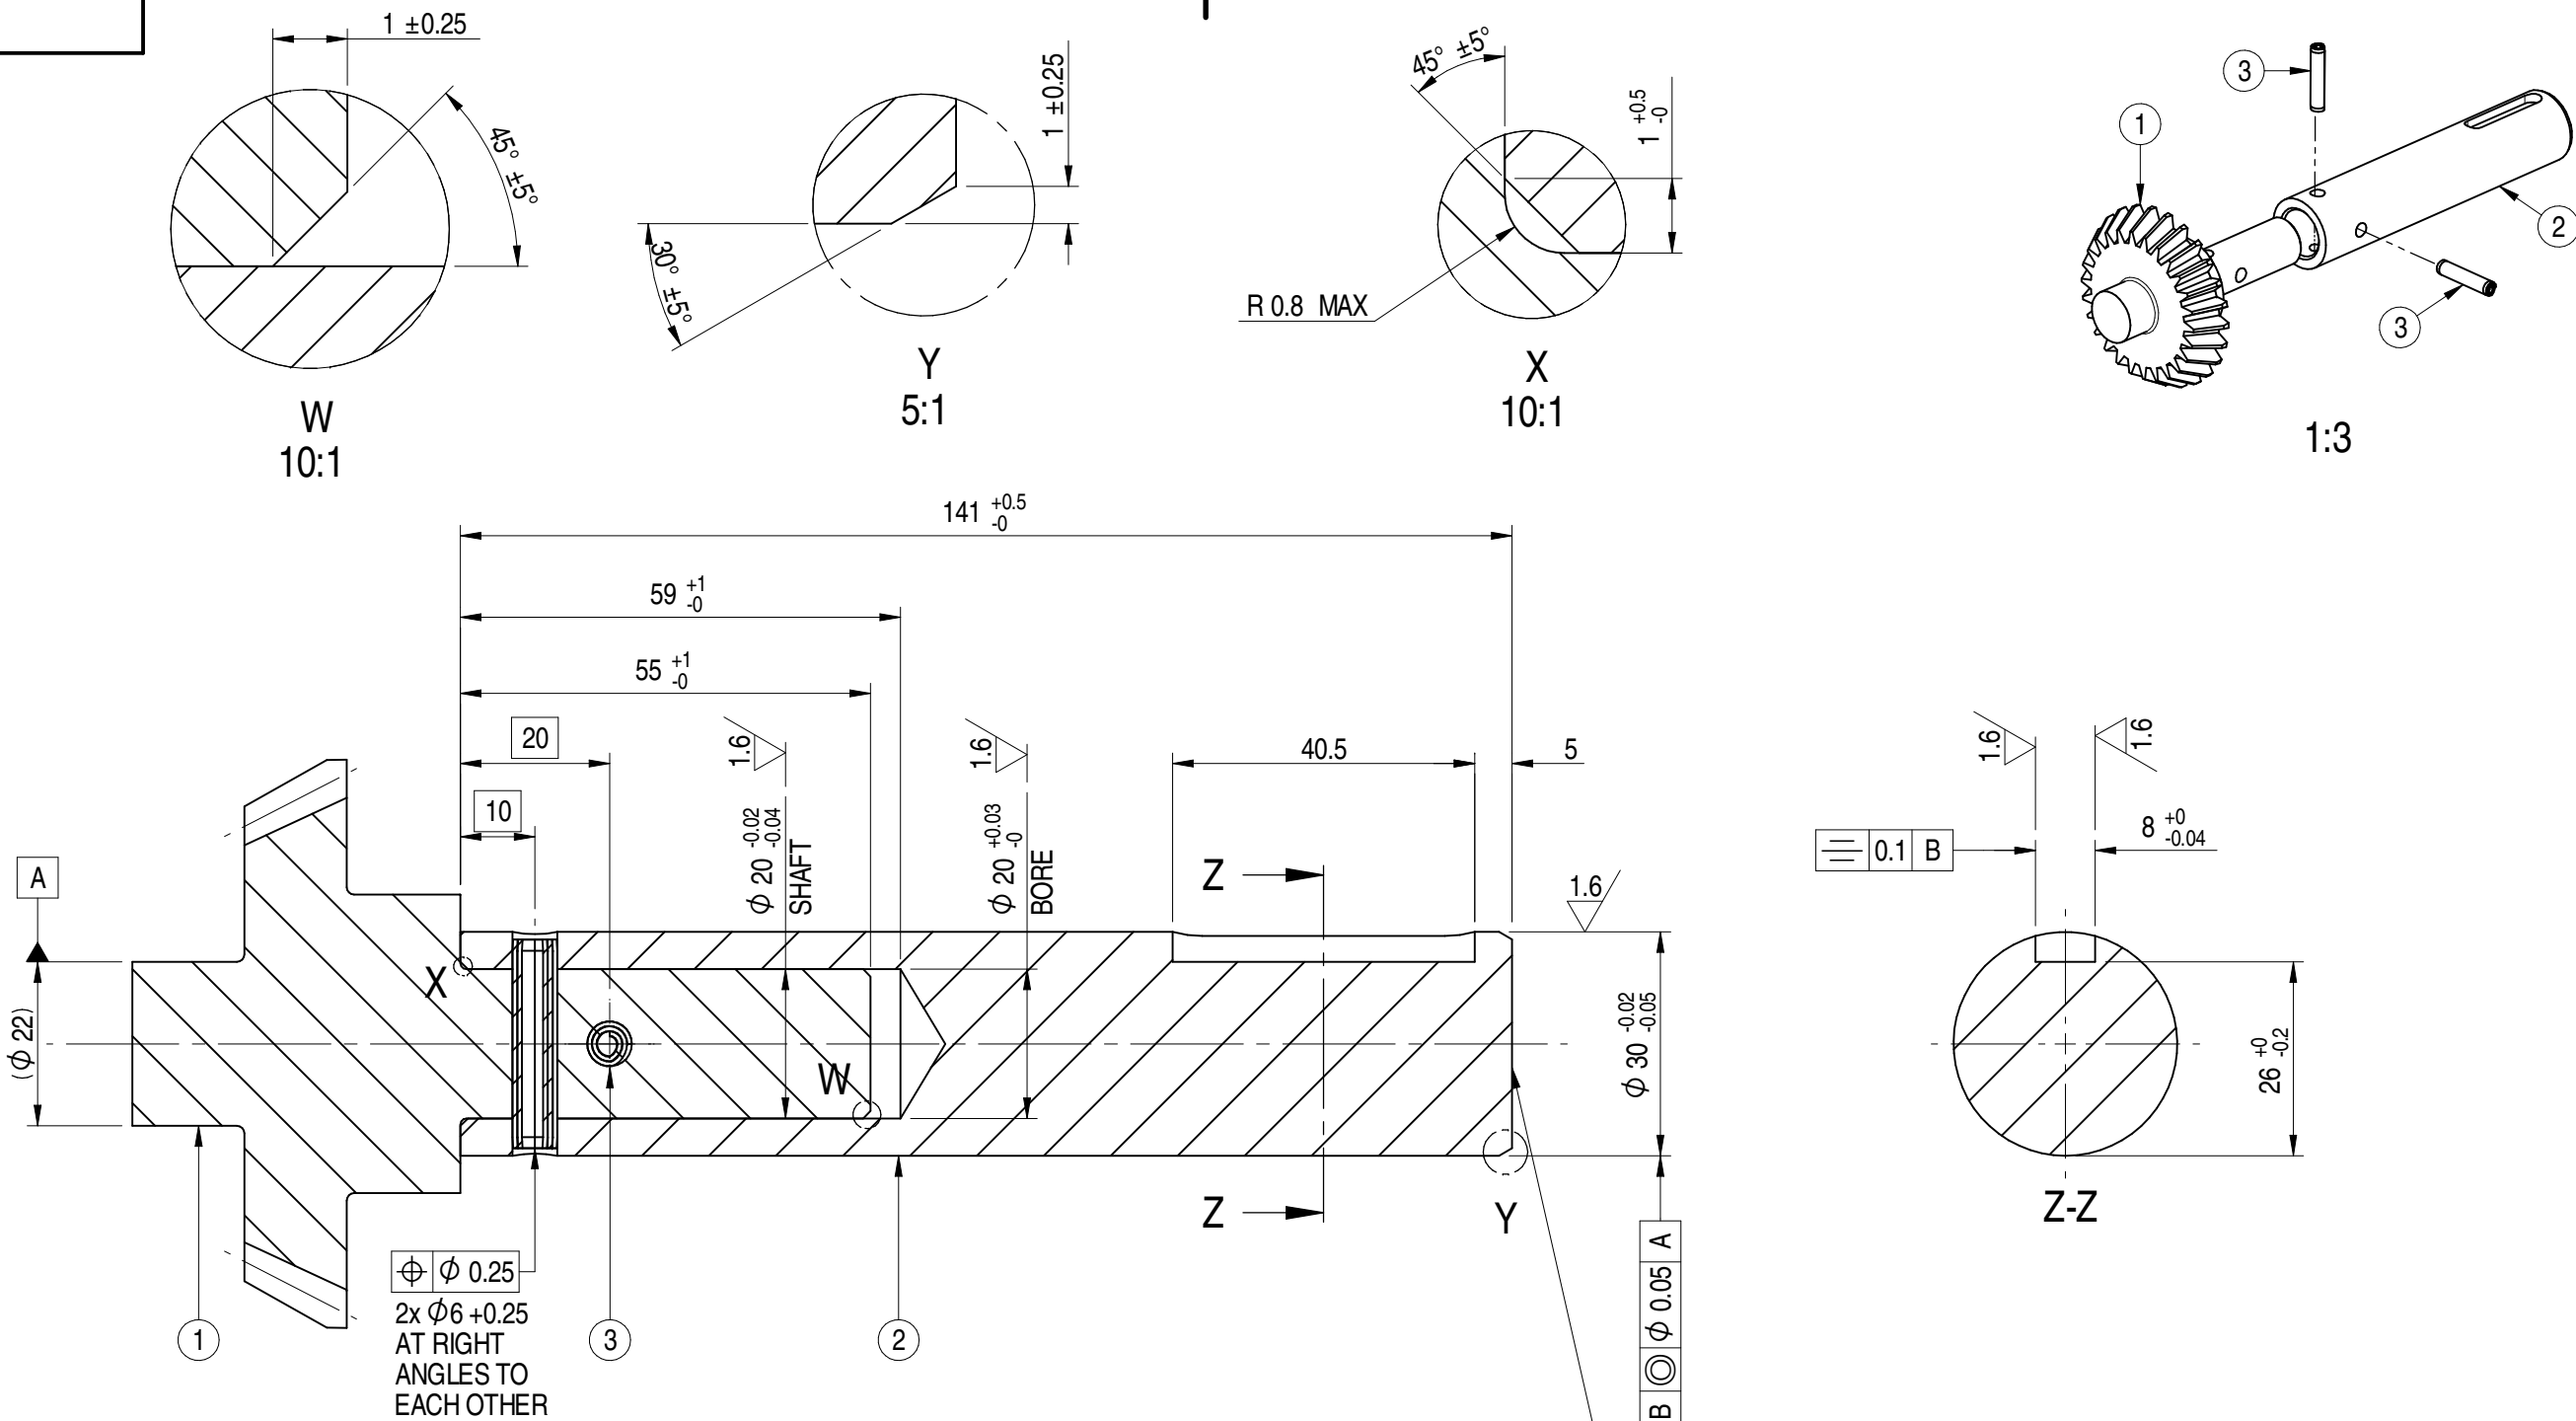


Drawing Number
IB-00567-1



Item	Part Number	Material	Quantity
1	IB4A451	STEEL BS970 817M40T (EN24T) or GB3077-88 GRADE 40Cr Rm 850 TO 1000 N/mm2, Re min 680 n/mm2, 248 to 302 HB	1
2	STAINLESS SHAFT	DUPLEX GRADE S31803	1
3	SPIROL6X28	CARBON STEEL CS 70	2

Unless otherwise stated : General tolerances to ISO 2768-m Machined surface finish:3.2 µm Ra Remove all burrs and sharp edges		Linear 0.5 - 6 ± 0.1 (6) - 30 ± 0.2 (30) - 120 ± 0.3	(120) - 400 ± 0.5 (400) - 1000 ± 0.8 (1000) - 2000 ± 1.2 (2000) - 4000 ± 2.0	Radii/Chamfers 0.5 - 3 ± 0.2 (3) - 6 ± 0.5 over 6 ± 1	Angles upto 10 ± 1° (10) - 50 ± 0.5° (50) - 120 ± 0.33°	Material SEE TABLE	
rotork® Gears LEEDS - UK www.rotork.com		This drawing is confidential and is the property of Rotork Gears and must not be reproduced either wholly or partly. All rights in respect of patents, designs and copyrights are reserved. © 2015		Document Type		DETAIL DRAWING	
						Mass 1.29 kg	
						Dimensions in mm	
				Created		M JONES	
Checked		R DIX		08/04/2015		PINNED INPUT SHAFT FOR AGGRESSIVE DUTY HOB 210 2:1	
Approved						Drawing Number	
						IB-00567-1	
						Iss.	
						01	
						Sheet 1 of 1	
						Size A3	