

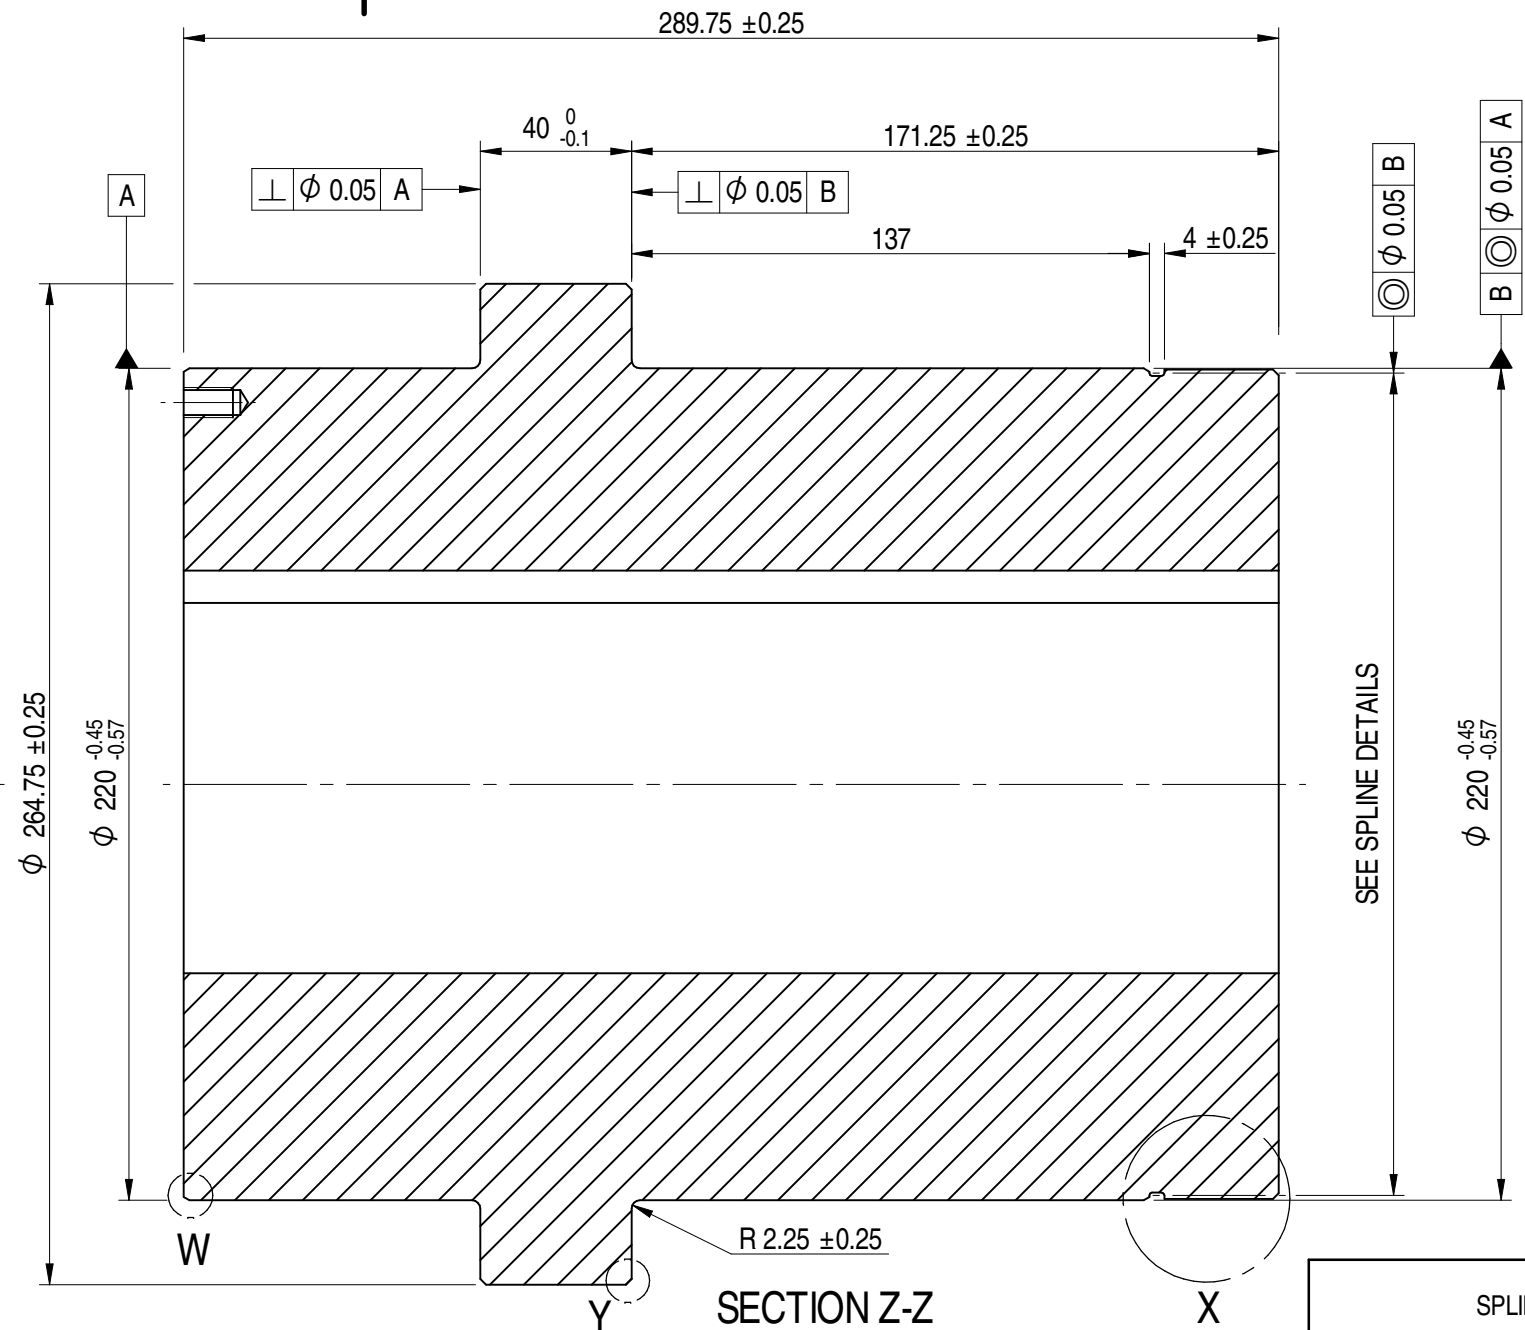
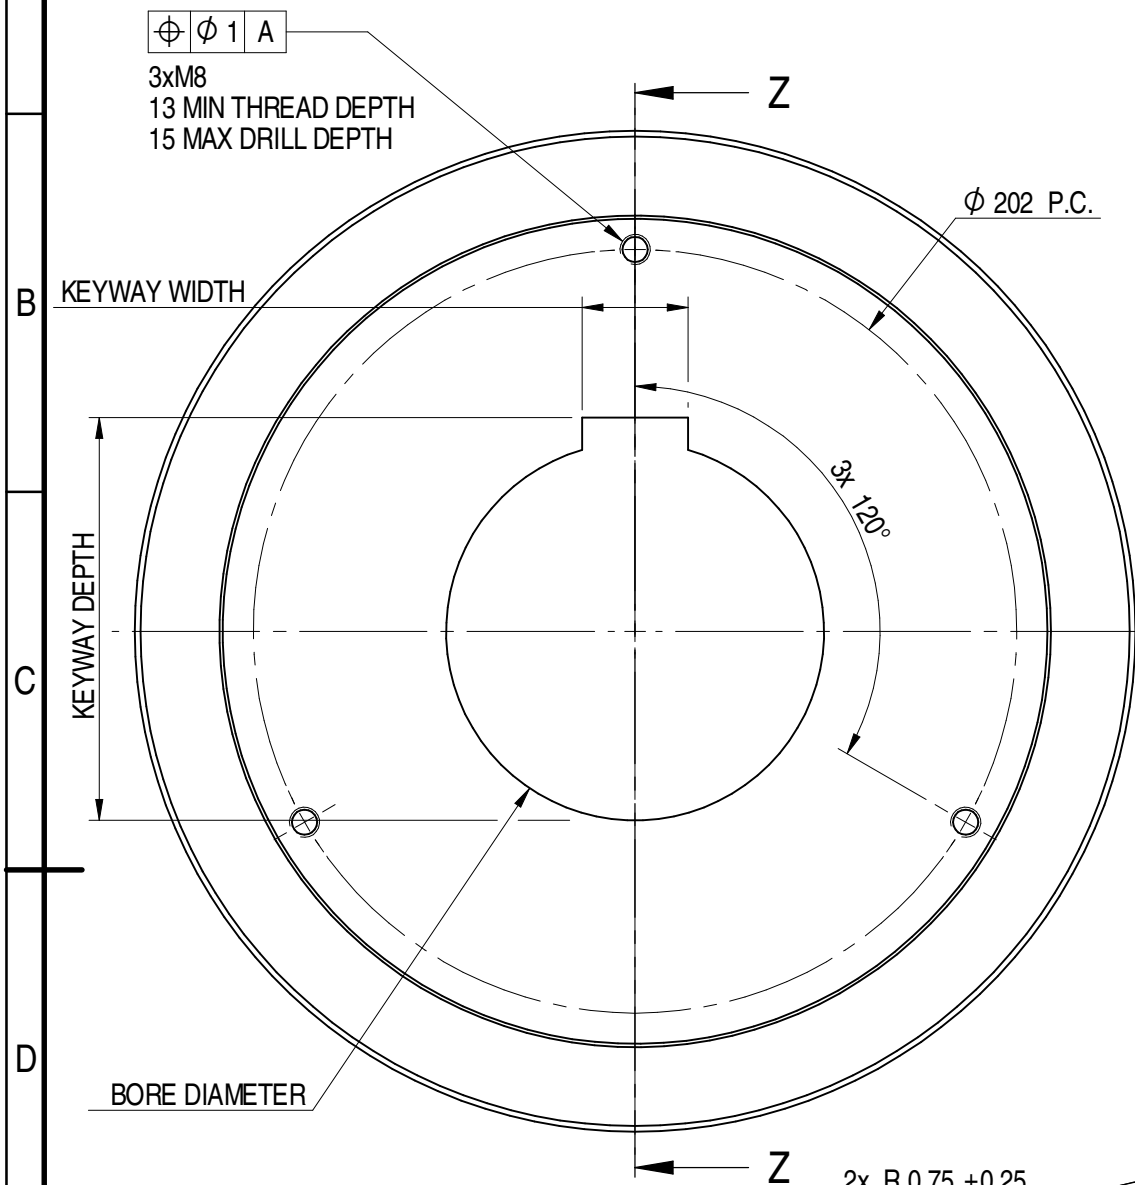
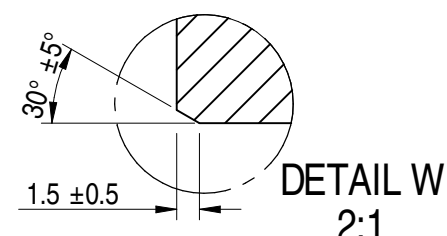


ISOMETRIC
1:10

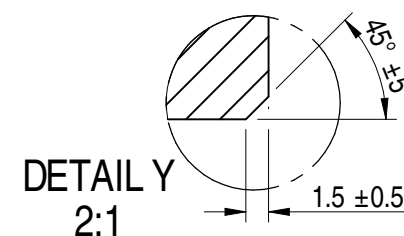

SPLINE DETAILS	
NUMBER OF SPLINES	172
PRESSURE ANGLE	30°
MAJOR DIAMETER	219.35-0.13
FORM DIAMETER	216.73
MINOR DIAMETER	216.81
SPLINE THICKNESS MAX. EFF.	1.957
SPLINE THICKNESS MIN. ACT.	1.813
PIN DIAMETER	2.438
DIMENSION OVER PINS	221.95
20/40 PITCH INVOLUTE FLAT ROOT SIDE FIT	

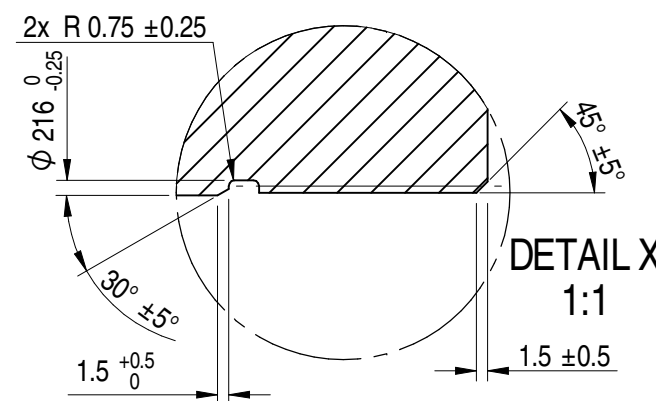

5			
4			
3			
2			
1			
REF	BORE Ø	KEYWAY WIDTH	KEYWAY DEPTH

A	EC0285	-	-	-	-	FIRST ISSUE
Iss.	EC	Revised	Checked	Approved	Date	Change Description

Unless otherwise stated :
General tolerances to ISO 2768-m
Machined surface finish: $3.2 \mu\text{m Ra}$ ✓
Remove all burrs and sharp edges

Linear	(120) - 400	± 0.5
0.5 - 6	± 0.1	(400) - 1000 ± 0.8
(6) - 30	± 0.2	(1000) - 2000 ± 1.2
(30) - 120	± 0.3	(2000) - 4000 ± 2.0

Radii/Chamfers	Angles
0.5 - 3 ± 0.2	upto 10 ± 1°
(3) - 6 ± 0.5	(10) - 50 ± 0.5°
over 6 ± 1	(50) - 120 ± 0.33°

Material	STEEL BS970 070M20
----------	--------------------

rotork®
Gears
LEEDS - UK
www.rotork.com

This drawing is confidential and is the property of Rotork Gears and must not be reproduced either wholly or partly. All rights in respect of patents, designs and copyrights are reserved. © 2014

Document type **DETAIL DRAWING**

Mass	72.91 kg
------	----------

Title
OUTPUT SLEEVE
ISO F40/DIN G7 OUTPUT STYLE A1

Dimensions in mm

Scale 1:2

Created	
---------	--

R DIX

27/03/2014

Drawing Number

SS. R

Created
Checked

M JONES

02/05/2014

IS-00131-1

A |

Approved

32,33,34	
35	
36	
37	
38	
39	
40	
41	
42	
43	
44	
45	
46	
47	
48	
49	
50	
51	
52	
53	
54	
55	
56	
57	
58	
59	
60	
61	
62	
63	
64	
65	
66	
67	
68	
69	
70	
71	
72	
73	
74	
75	
76	
77	
78	
79	
80	
81	
82	
83	
84	
85	
86	
87	
88	
89	
90	
91	
92	
93	
94	
95	
96	
97	
98	
99	
100	

Sheet 1 of

[illegible]

--	--

8
