
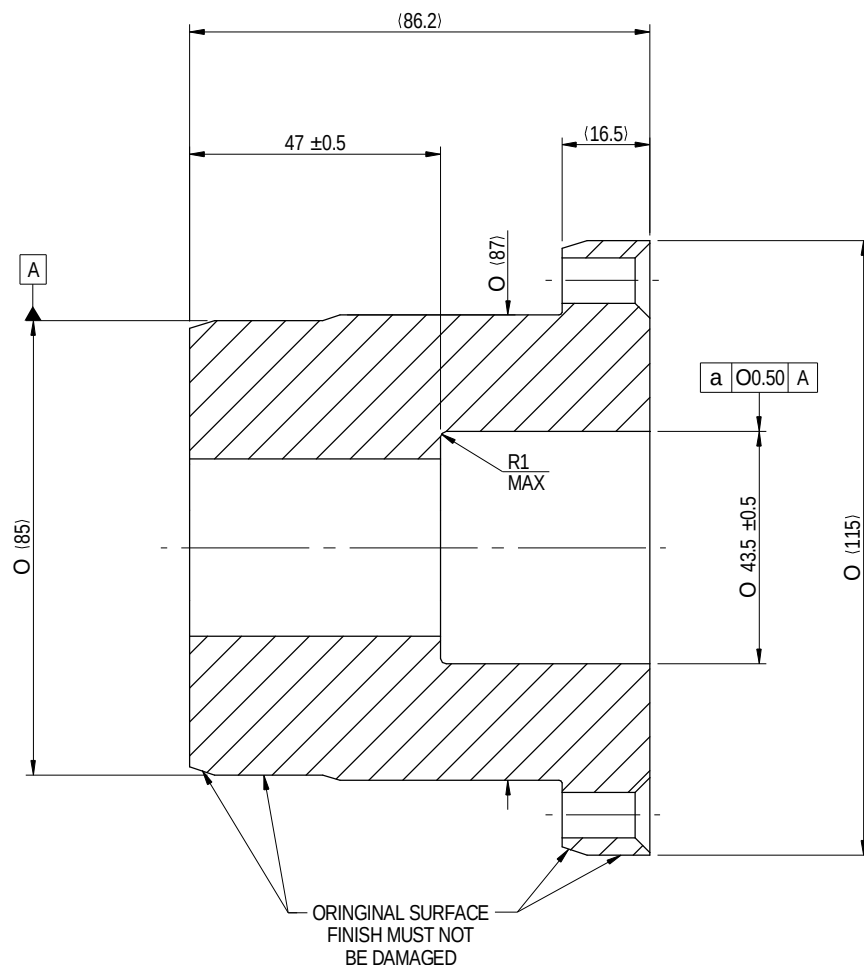
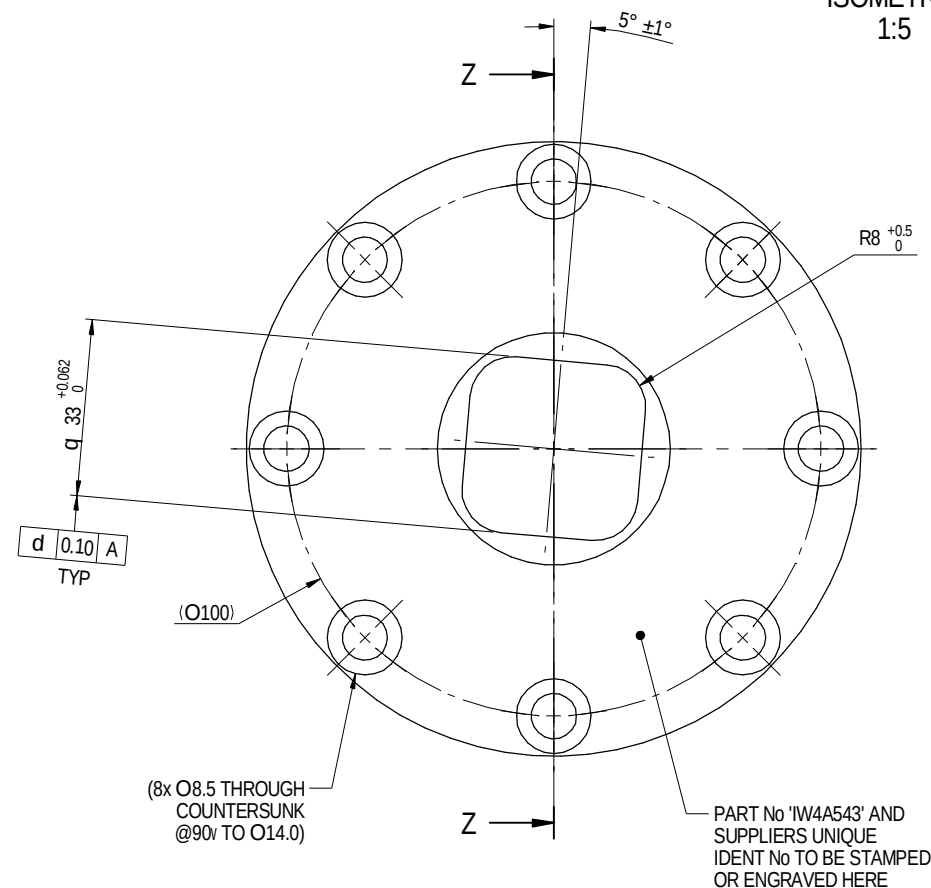




SECTION Z-Z

						Unless otherwise stated : General tolerances to ISO 2768-m Machined surface finish: 3.2 µm Ra ✓ Remove all burrs and sharp edges	Linear 0.5 - 6 ± 0.1 (6) - 30 ± 0.2 (30) - 120 ± 0.3	(120) - 400 ± 0.5 (400) - 1000 ± 0.8 (1000) - 2000 ± 1.2 (2000) - 4000 ± 2.0	Radius/Chamfers 0.5 - 3 ± 0.2 (3) - 6 ± 0.5 over 6 ± 1	Angles upto 10 ± 1° (10) - 50 ± 0.5° (50) - 120 ± 0.3°	Material STEEL TO BS 970 GRADE 070M20 or GB699-88 GRADE 45
											Made From IW4A430
						rotork® Gears Leeds - UK www.rotork.com This drawing is confidential and is the property of Rotork Gears and must not be reproduced either wholly or partly. All rights in respect of patents, designs and copyrights are reserved. © 2013	Document type	DETAIL	Mass	3.12 kg	Title
								Dimensions in mm		OUTPUT SLEEVE 33SQ AT 5 DEGREES	
								Scale 1:1			
							Created	J PRIESTLEY	12/06/2013	Drawing Number	Rev
						Checked	C. FLESHER	12/06/2013	IW4A543		
						Approved			Sheet 1 of 1	Size A3	
A	-	-	-	DD/MM/YYYY	FIRST ISSUE						
Rev	CN	Revised	Approved	Date	Change Description						