
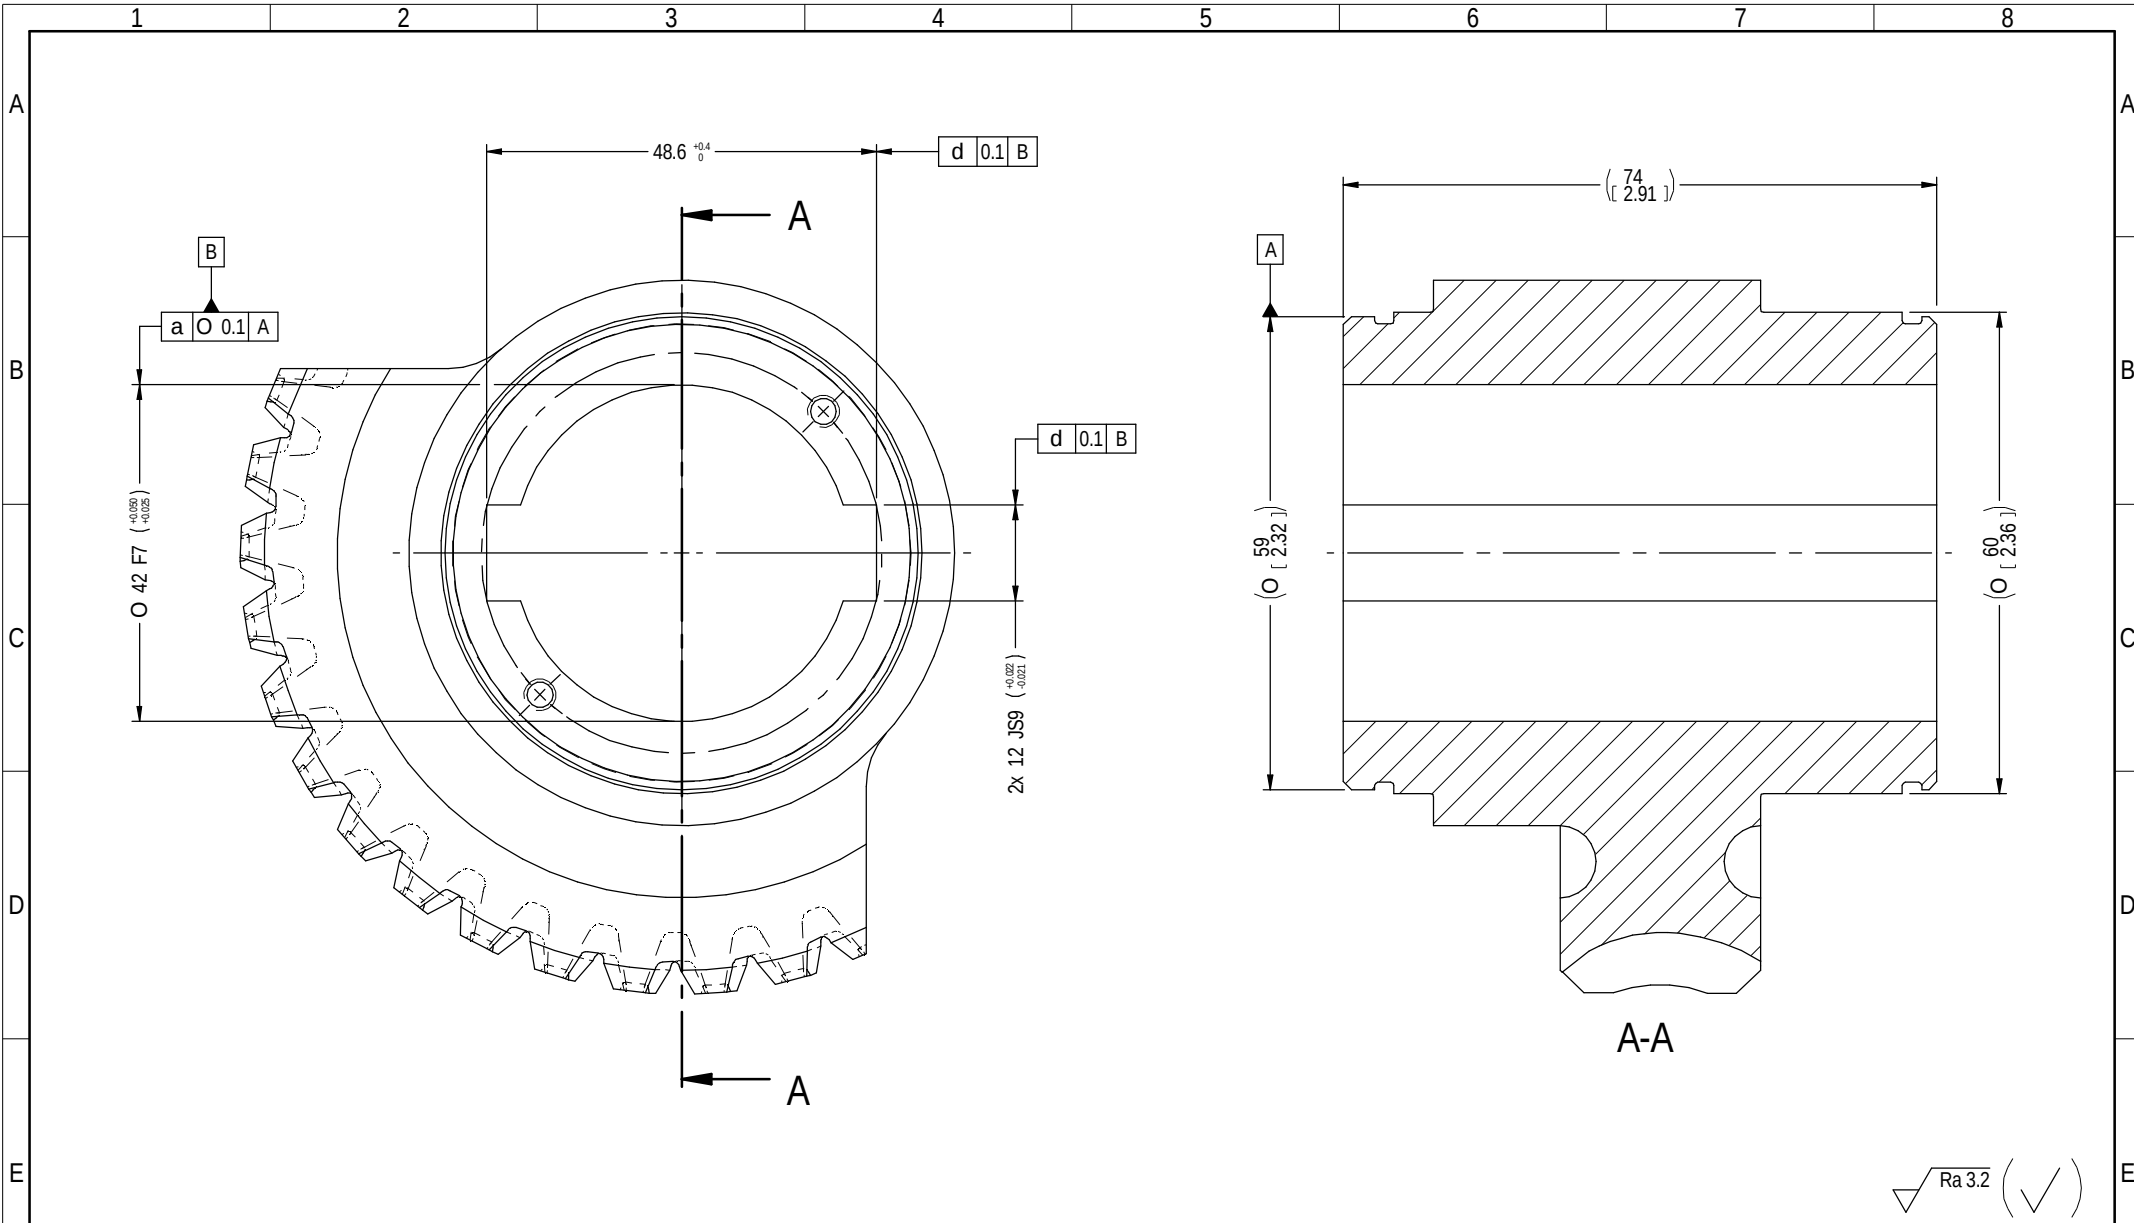




NOTES:
1. MADE FROM 44BZ200000000 OR 44BZ200000005

Rev	ECN	Revised	Rev. Approved	Date	Change Description
1					

UNLESS OTHERWISE STATED					Material: GGG 40 (DIN1693/EN1563/EN-GJS-400-15)			
General tolerances to ISO 2768-m Remove all burrs and sharp edges	Linear		Radius/Chamfers	Angles				
	0.5 - 6	± 0.1 (400) - 1000 ± 0.8	0.5 - 3 ± 0.2	upto 10 ± 1°				
	(6) - 30	± 0.2 (1000) - 2000 ± 1.2	(3) - 6 ± 0.5	(10) - 50 ± 0°30'				
	(30) - 120	± 0.3 (2000) - 4000 ± 2	Over 6 ± 1	(50) - 120 ± 0°20'				
	(120) - 400	± 0.5						
					Treatment: -			
rotork® Gears © 2019 Rotork Group of Companies. All rights reserved. This document and its contents may not be reproduced, distributed, transmitted, displayed, published, or broadcast, in whole, or in part, without the prior, express written permission of Rotork Group of Companies. LOSSER - NL www.rotork.com					Dimensions in mm			
					Scale 1.5:1			
			Created		Drawing Number		Rev	
			Checked		44B0420F12000		0-0	
			Approved		Nominal Mass 1.26 kg		Size A3	Sheet 1 of 1

Template Issue : 2018-05-10