


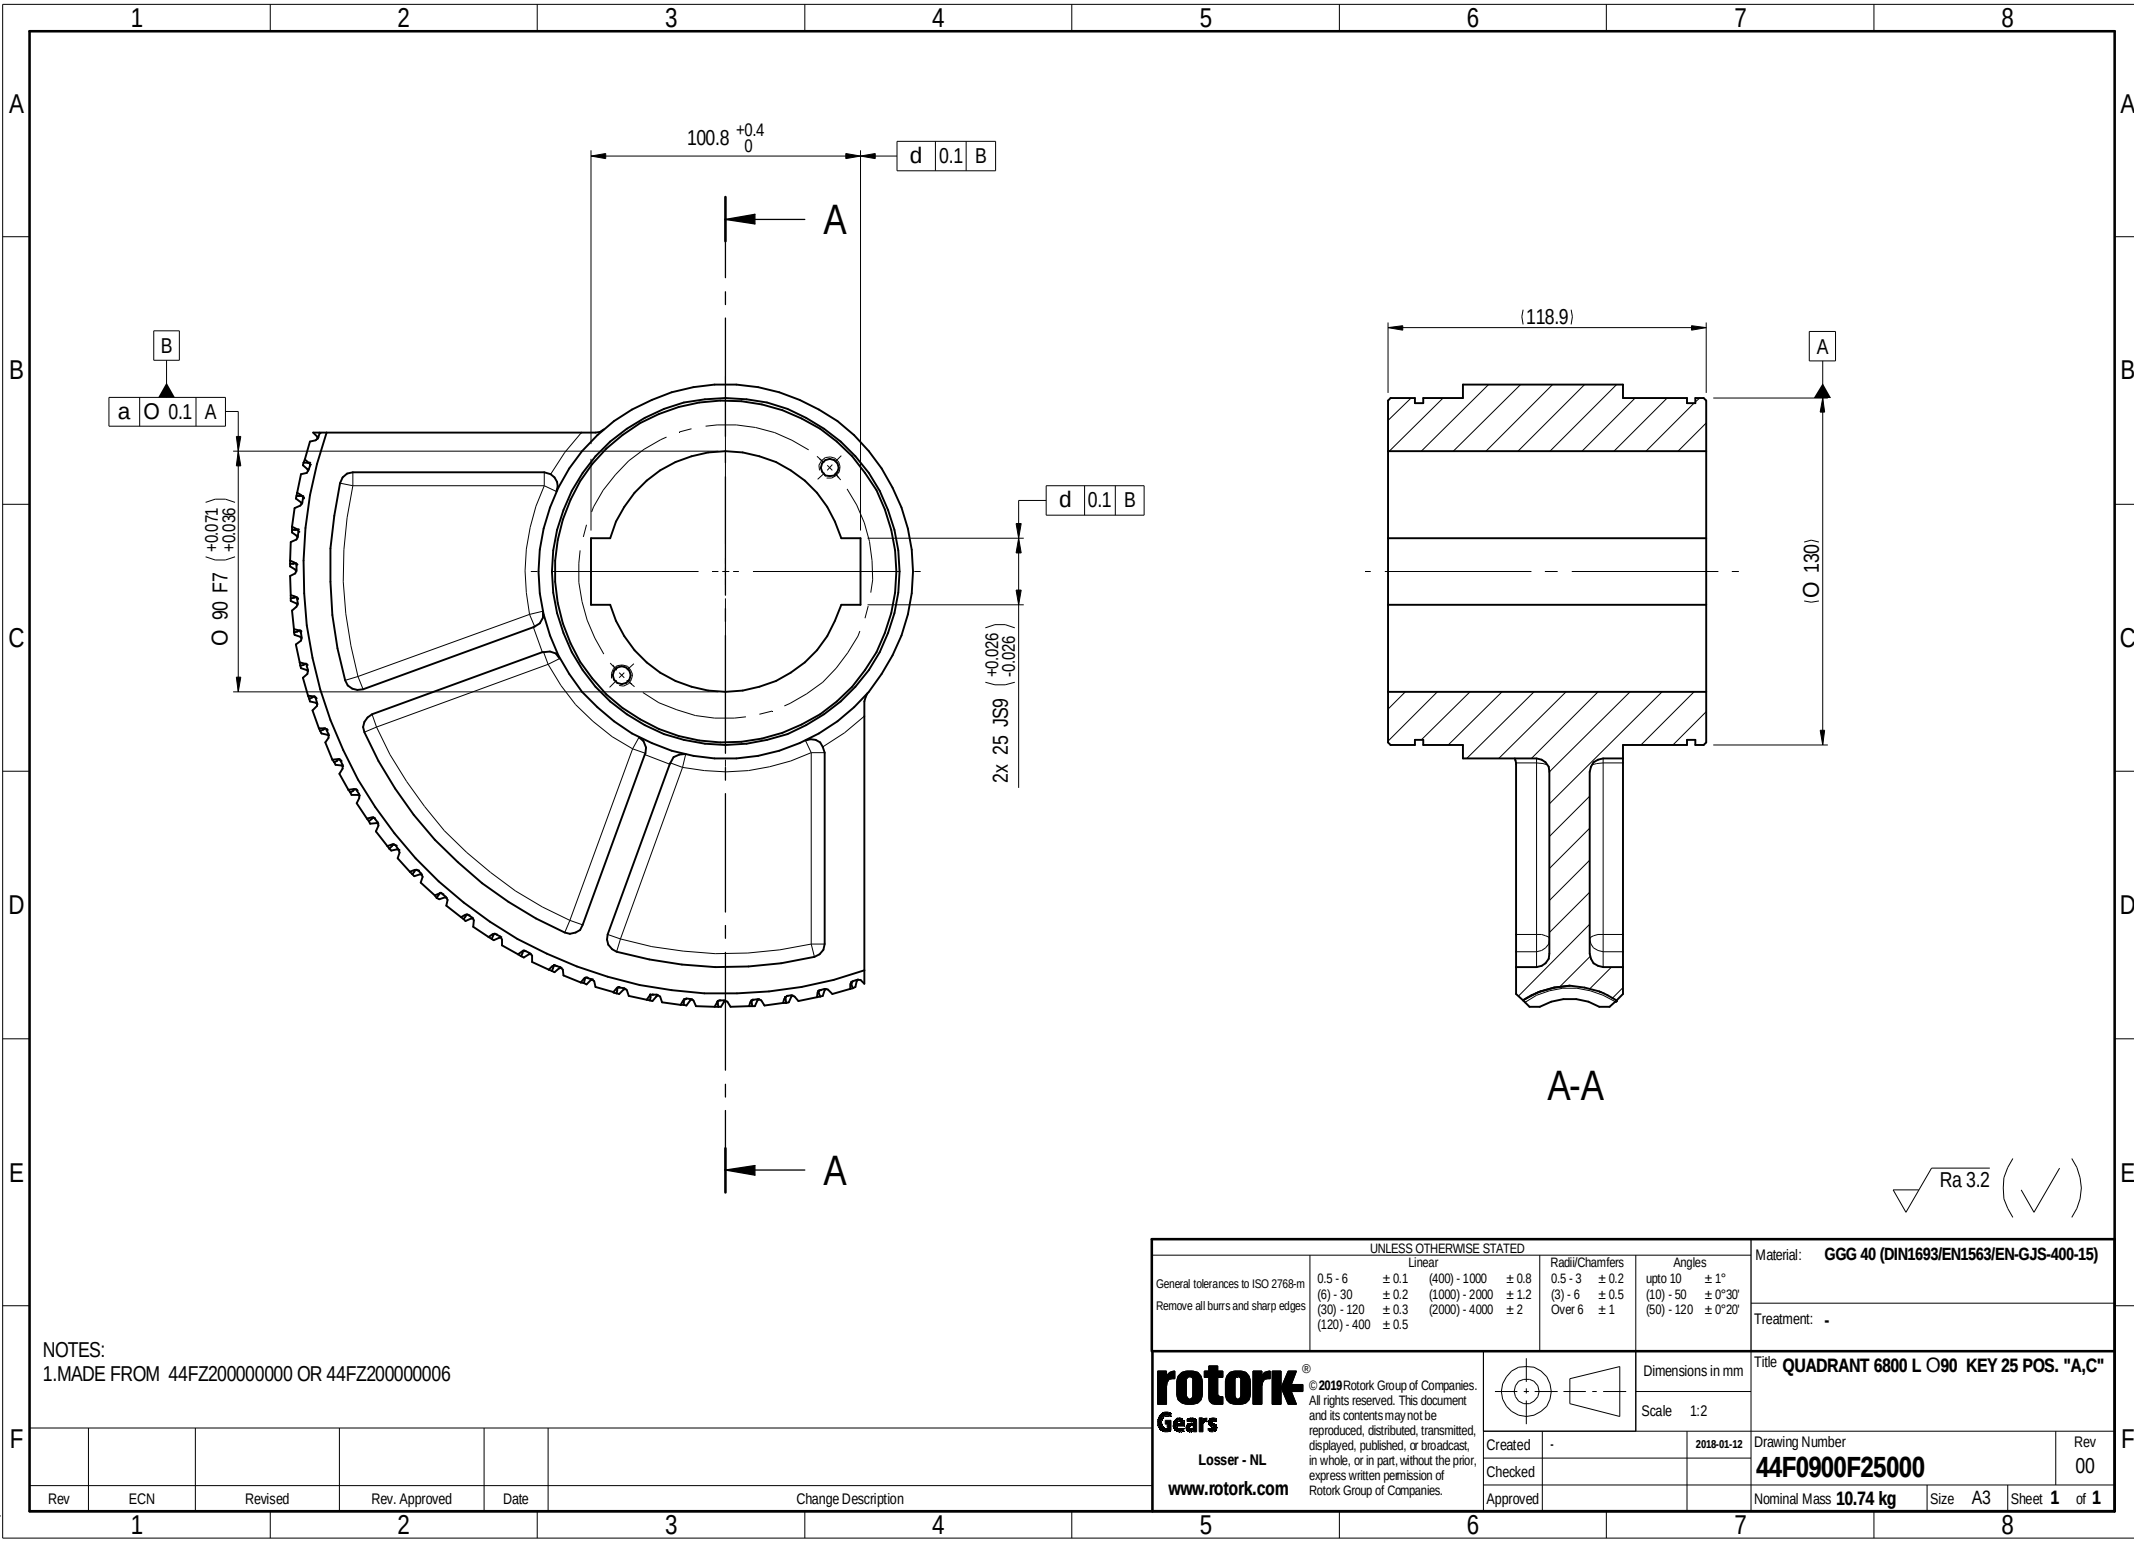

NOTES:
1.MADE FROM 44FZ200000000 OR 44FZ200000006

UNLESS OTHERWISE STATED				Material: GGG 40 (DIN1693/EN1563/EN-GJS-400-15)	
General tolerances to ISO 2768-m Remove all burrs and sharp edges	0.5 - 6	± 0.1	(400) - 1000 ± 0.8	Angles upto 10	± 1°
	(6) - 30	± 0.2	(1000) - 2000 ± 1.2	(3) - 6	± 0°30'
	(30) - 120	± 0.3	(2000) - 4000 ± 2	(10) - 50	± 0°30'
	(120) - 400	± 0.5		(50) - 120	± 0°20'
Radii/Chamfers 0.5 - 3 ± 0.2 (3) - 6 ± 0.5 Over 6 ± 1				Treatment: -	
rotork® Gears © 2019 Rotork Group of Companies. All rights reserved. This document and its contents may not be reproduced, distributed, transmitted, displayed, published, or broadcast, in whole, or in part, without the prior, express written permission of Rotork Group of Companies. Losser - NL www.rotork.com				Title QUADRANT 6800 L O90 KEY 25 POS. "A,C"	
				Drawing Number 44F0900F25000	
				Nominal Mass 10.74 kg	
				Size A3 Sheet 1 of 1	

Template Issue : 2019-05-22