


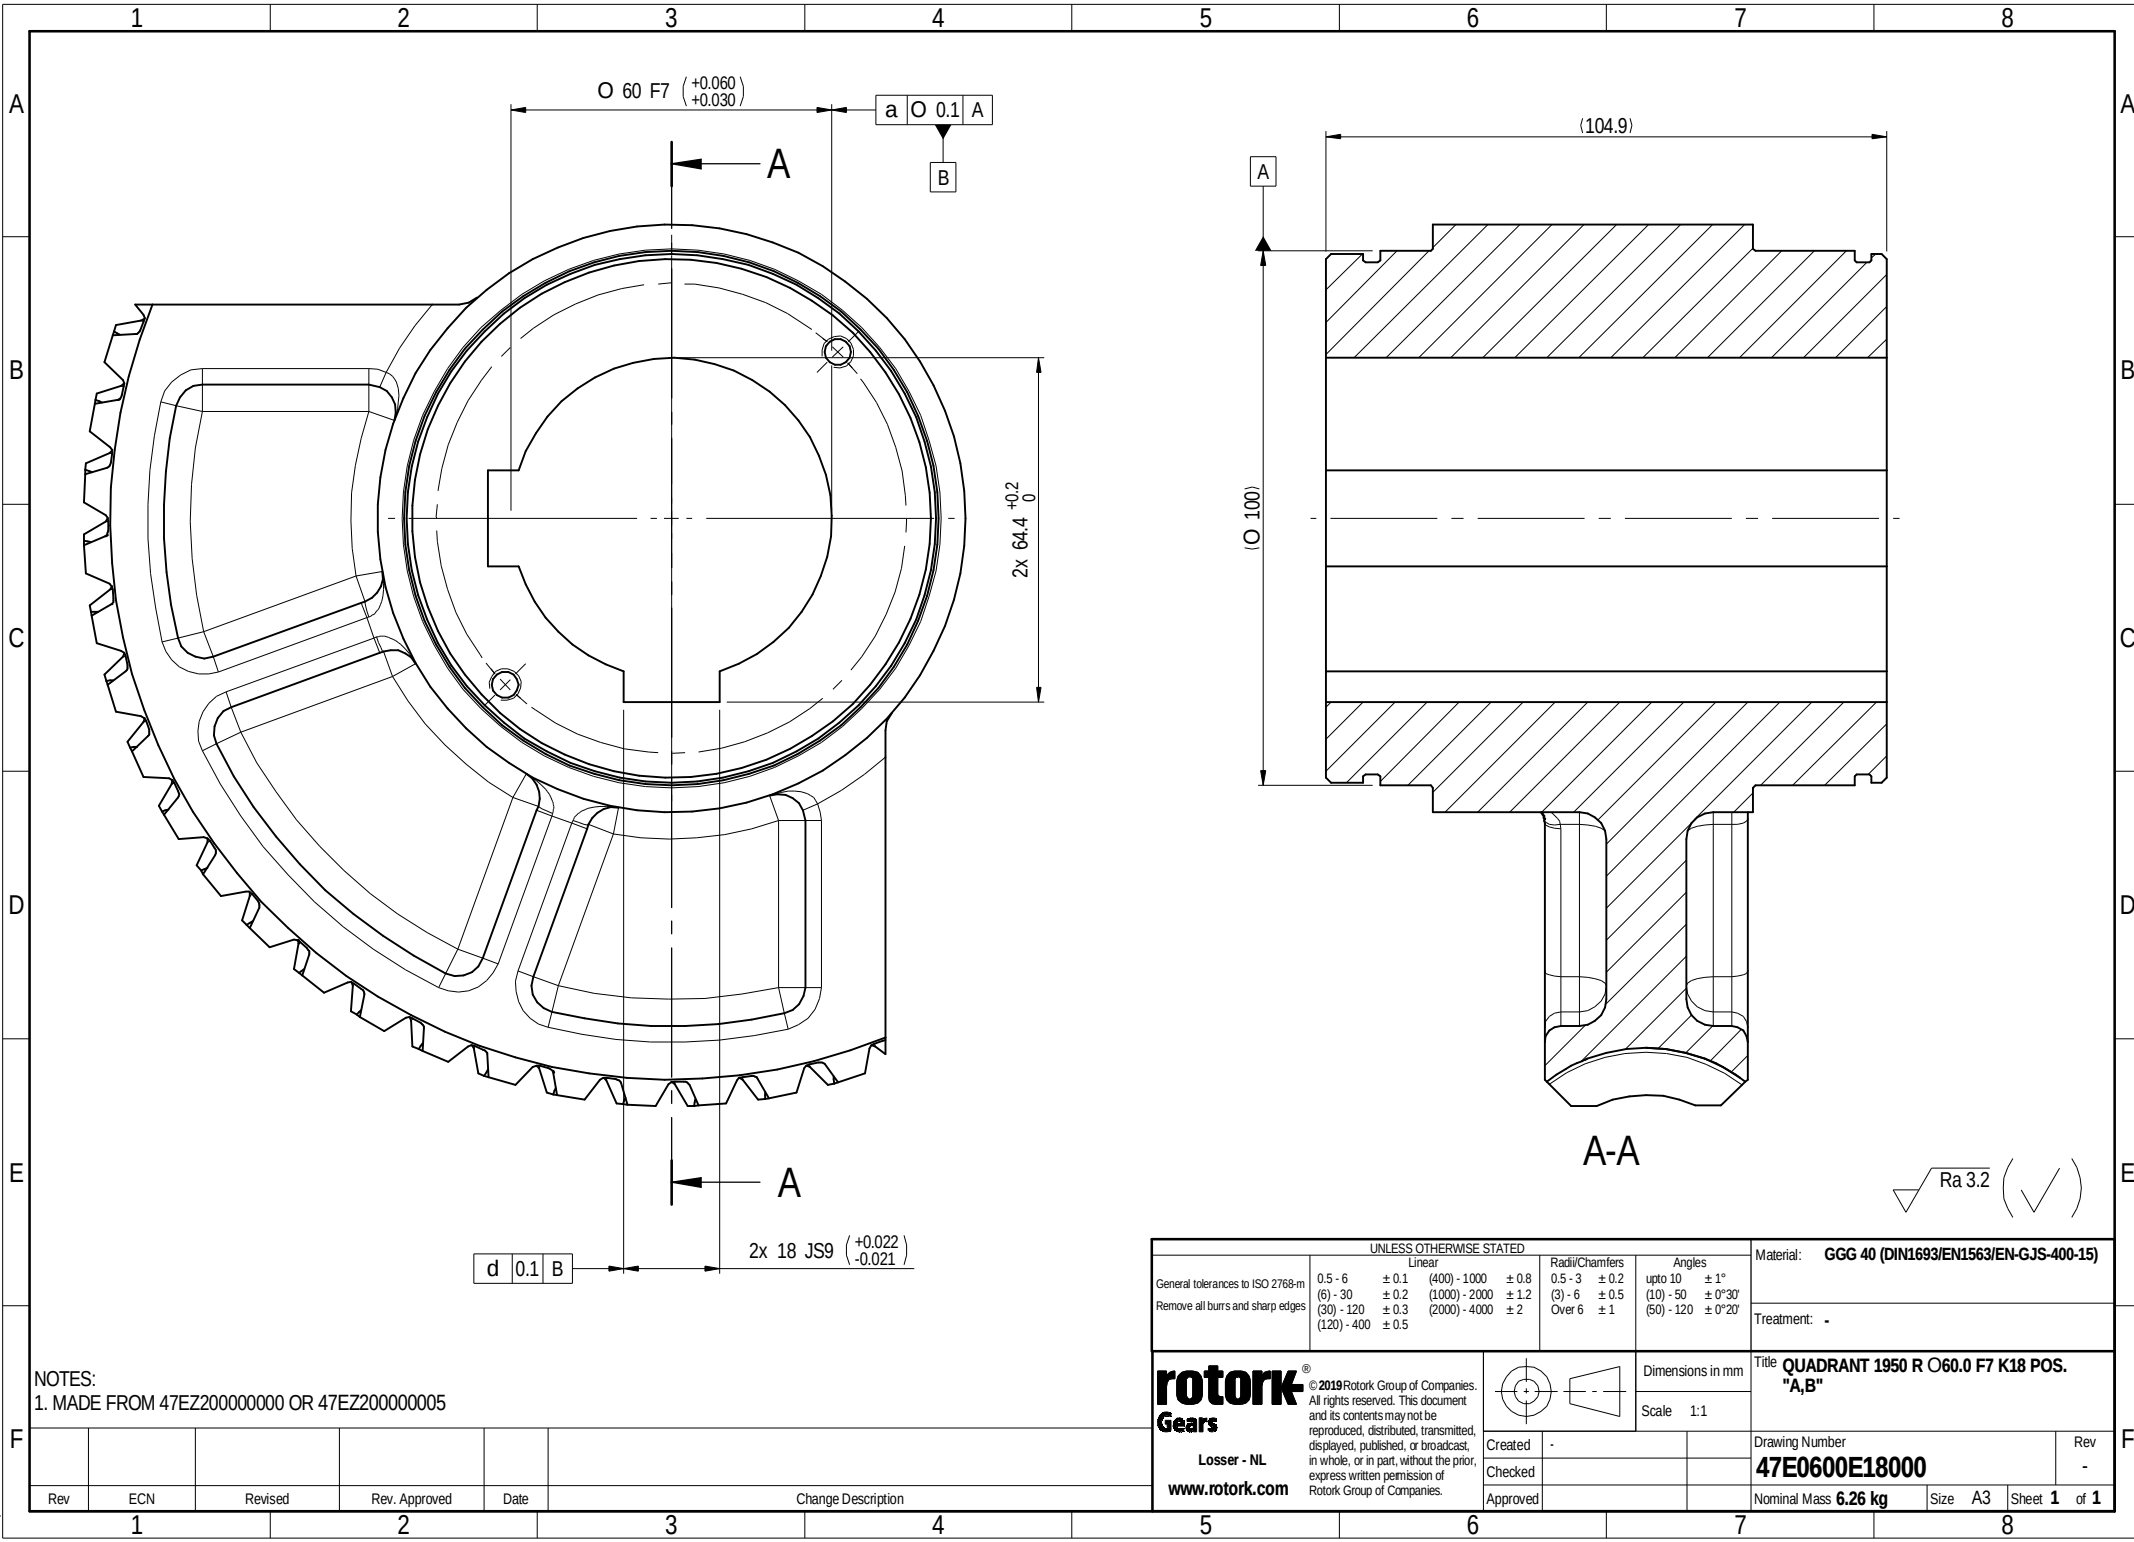

O 60 F7 $\begin{pmatrix} +0.060 \\ +0.030 \end{pmatrix}$

a O 0.1 A

B

A

2x 64.4 $\begin{pmatrix} +0.2 \\ 0 \end{pmatrix}$

A

d 0.1 B

2x 18 JS9 $\begin{pmatrix} +0.022 \\ -0.021 \end{pmatrix}$

(104.9)


A

(O 100)

A-A

✓ Ra 3.2 (✓)

NOTES:
1. MADE FROM 47EZ200000000 OR 47EZ200000005

UNLESS OTHERWISE STATED				Material: GGG 40 (DIN1693/EN1563/EN-GJS-400-15)		
General tolerances to ISO 2768-m Remove all burrs and sharp edges	Linear		Radii/Chamfers	Angles		
	0.5 - 6	± 0.1	(400) - 1000	± 0.8	0.5 - 3 ± 0.2	
	(6) - 30	± 0.2	(1000) - 2000	± 1.2	upto 10 ± 1°	
	(30) - 120	± 0.3	(2000) - 4000	± 2	(10) - 50 ± 0°30'	
	(120) - 400	± 0.5			(50) - 120 ± 0°20'	
				Treatment: -		
rotork [®] Gears © 2019 Rotork Group of Companies. All rights reserved. This document and its contents may not be reproduced, distributed, transmitted, displayed, published, or broadcast, in whole, or in part, without the prior, express written permission of Rotork Group of Companies. Losser - NL www.rotork.com					Title QUADRANT 1950 R O60.0 F7 K18 POS. "A,B"	
			Dimensions in mm			
			Scale 1:1			
			Created -			
Checked						
Approved						
		Drawing Number 47E0600E18000		Rev -		
		Nominal Mass 6.26 kg		Size A3	Sheet 1 of 1	

Template Issue : 2019-05-22