

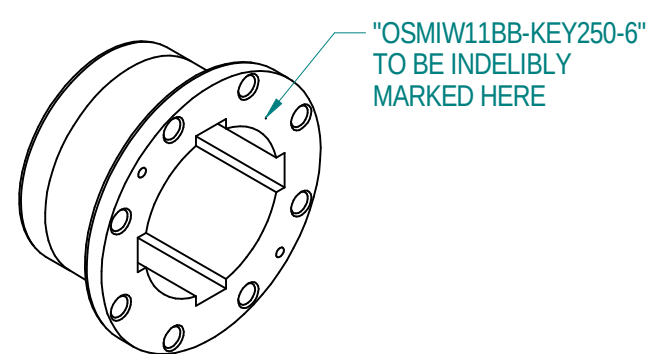
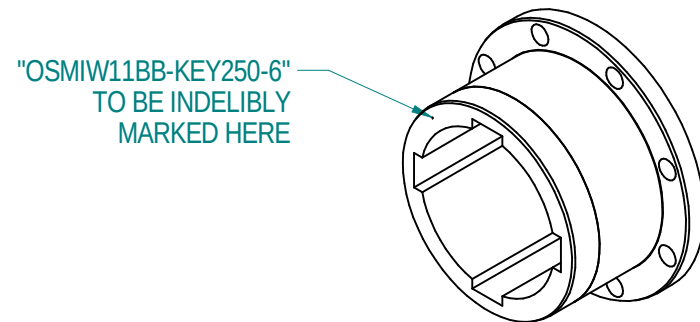


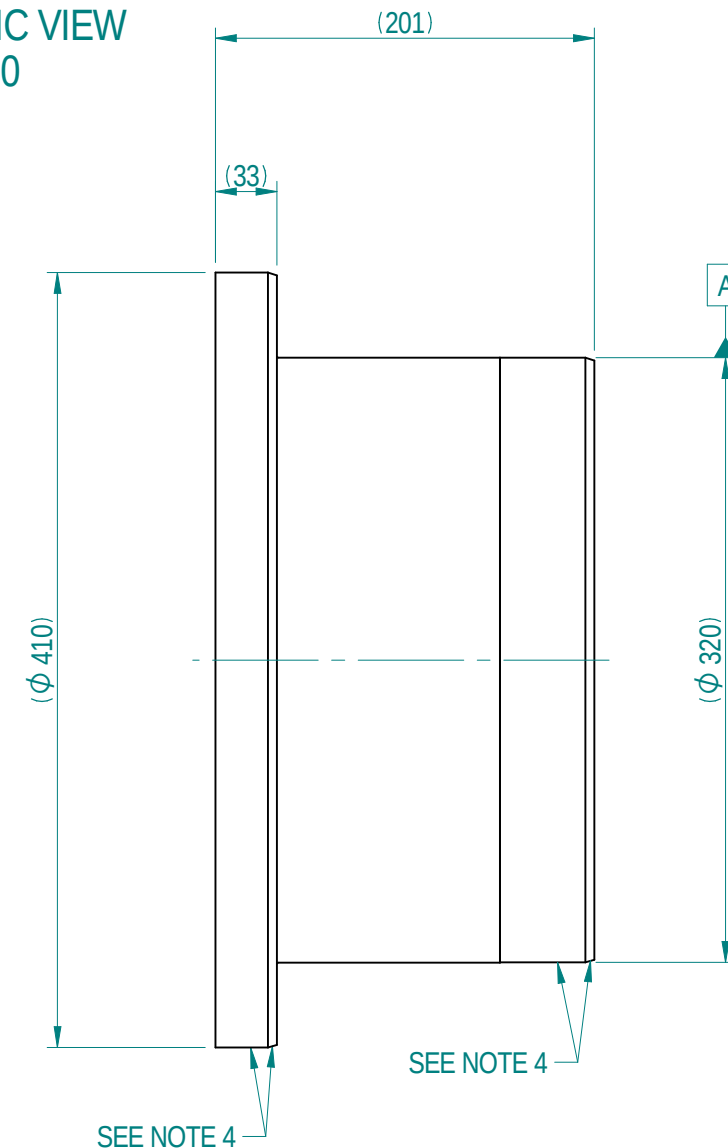


ISOMETRIC VIEW
1:10

ISOMETRIC VIEW
1:10

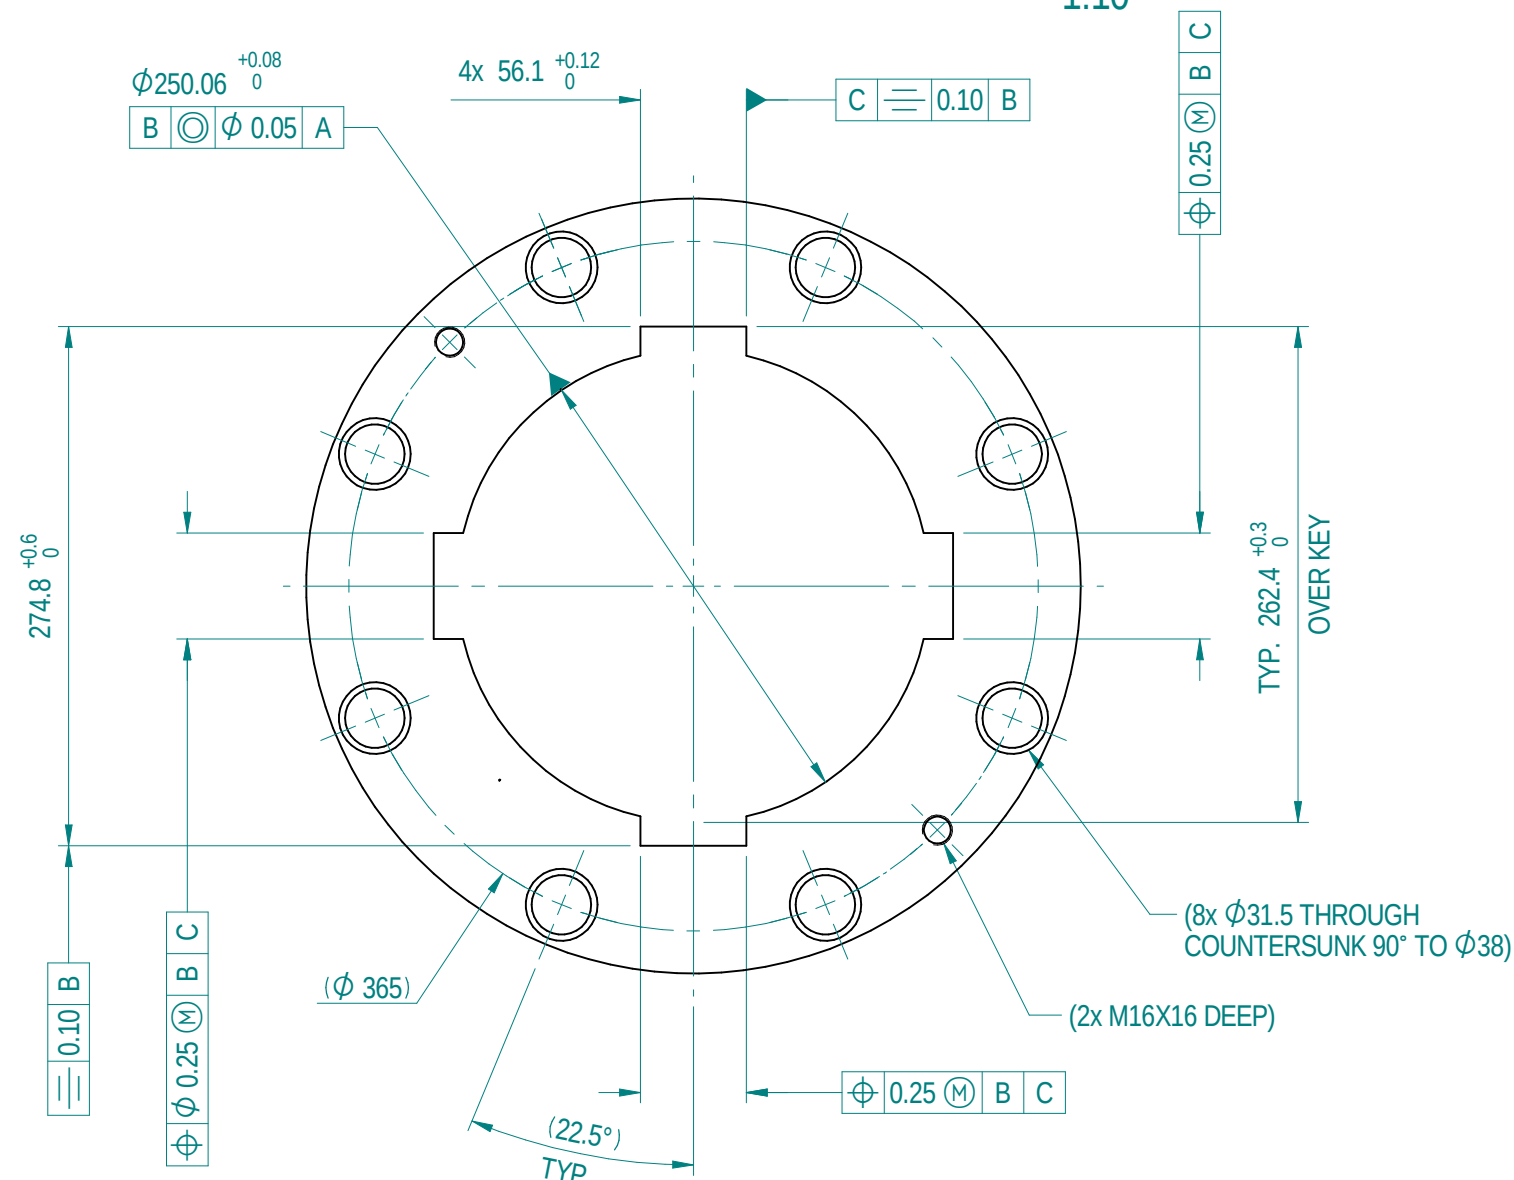

- NOTES:
1. BREAK ALL SHARP EDGES 0.5 x 45° MAX.
 2. MIN TOOL TIP RAD 0.4
 3. KEYSLOT ANGULAR RELATIONSHIP WITH HOLES TO BE ±1°
 4. SEALING DIAMETER: ORIGINAL SURFACE FINISH NOT TO BE DAMAGED

1	-	W.Ho				ADDED EXTRA MARKING ON OUTPUT SLEEVE FACE
A	-	-	-	-	19/04/22	FIRST ISSUE
Iss.	EC	Revised	Checked	Approved	Date	Change Description

Unless otherwise stated : General tolerances to ISO 2768-m Machined surface finish:3.2 μm Ra ✓ Remove all burrs and sharp edges		Linear (120) - 400 ± 0.5 (400) - 1000 ± 0.8 (6) - 30 ± 0.2 (1000) - 2000 ± 1.2 (30) - 120 ± 0.3 (2000) - 4000 ± 2.0		Radii/Chamfers 0.5 - 3 ± 0.2 (3) - 6 ± 0.5 over 6 ± 1		Angles upto 10 ± 1° (10) - 50 ± 0.5° (50) - 120 ± 0.33°		Material STEEL BS970 070M55 (EN9) ARCOR C OR V1 TREATED Made From IW-02006-1	
rotork® Gears - www.rotork.com This drawing is confidential and is the property of Rotork Gears and must not be reproduced either wholly or partly. All rights in respect of patents, designs and copyrights are reserved. © 2022		Document type DETAIL				Mass 55.66 kg		Title IW11BB OUTPUT SLEEVE REF: CONTRACT G/MJIW11BB REV 19	
				Dimensions in mm		Drawing Number OSMIW11BB-KEY250-6			
				Scale 1:4					
		Created		OSSG V11.04		19/04/2022		Iss.	
		Checked		SMOS v23		19/04/2022		Sheet 1 of 1 Size A3	
Approved		-		19/04/2022					