Drawing Number
OSIS19BA-40

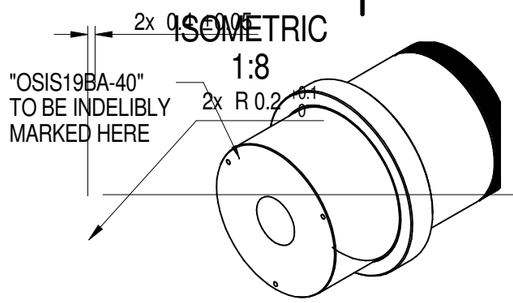



DETAIL Y
3:1

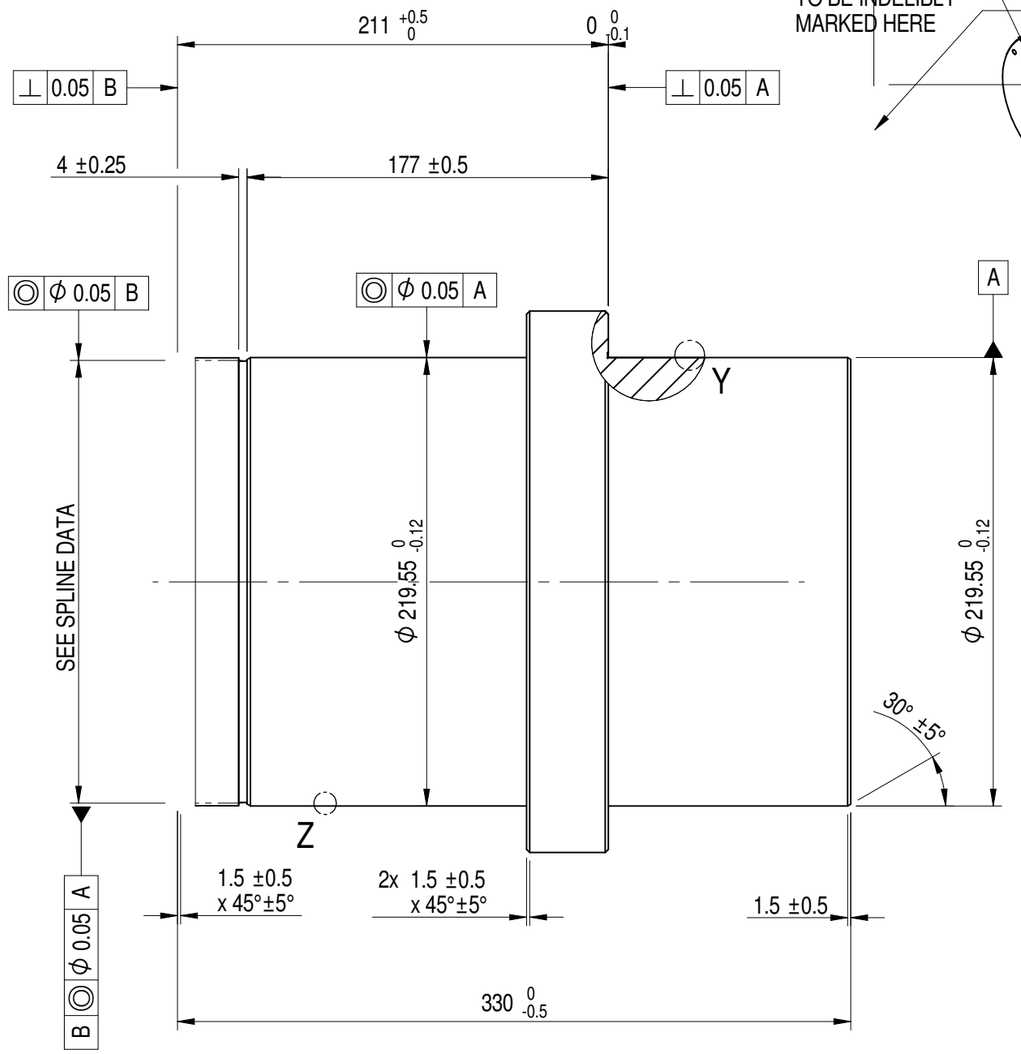

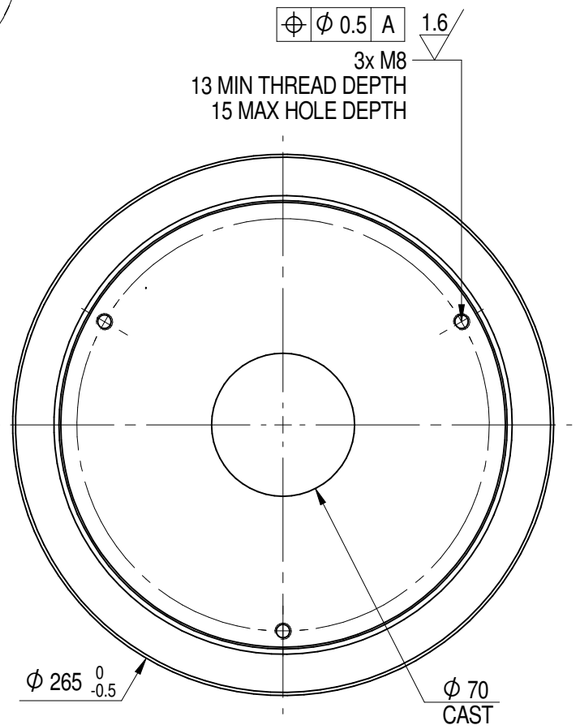

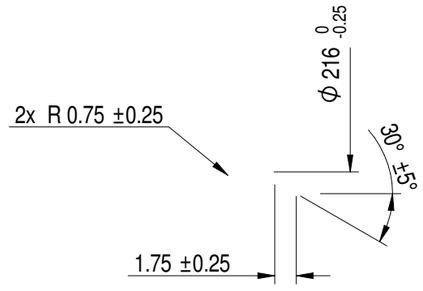

DETAIL Z
2:1



SPLINE DATA	
NUMBER OF SPLINES	172
PRESSURE ANGLE	30°
MAJOR DIAMETER	219.35-0.13
FORM DIAMETER	216.73
MINOR DIAMETER	216.81
SPLINE THICKNESS MAX. EFF.	1.957
SPLINE THICKNESS MIN. ACT.	1.813
PIN DIAMETER	2.438
DIMENSION OVER PINS	221.95

20/40 PITCH INVOLUTE
FLAT ROOT SIDE FIT

NOTES:
1. ALL UNSPECIFIED RADII TO BE 0.4 MAX

Iss.	EC	Revised	Checked	Approved	Date	Change Description
A	-	-	-	-	07/06/16	FIRST ISSUE

Unless otherwise stated :
General tolerances to ISO 2768-m
Machined surface finish:3.2 µm Ra
Remove all burrs and sharp edges

Linear				Radii/Chamfers		Angles	
0.5 - 6	± 0.1	(120) - 400	± 0.5	0.5 - 3	± 0.2	upto 10	± 1º
(6) - 30	± 0.2	(400) - 1000	± 0.8	(3) - 6	± 0.5	(10) - 50	± 0.5º
(30) - 120	± 0.3	(1000) - 2000	± 1.2	over 6	± 1	(50) - 120	± 0.33º
		(2000) - 4000	± 2.0				

Material ALUMINIUM BRONZE BS1400 AB2
Made From H-IS19C30

rotork® Gears
Leeds - UK
www.rotork.com

This drawing is confidential and is the property of Rotork Gears and must not be reproduced either wholly or partly. All rights in respect of patents, designs and copyrights are reserved. © 07/06/2016

Document type **DETAIL**
Mass **90.30 kg**
Dimensions in mm
Scale 1:2.5

Title
IS19 OUTPUT SLEEVE - EXTENDED
REF: CONTRACT G/1A129501 REV 0

Created	MTMS	07/06/2016
Checked	SMOS v21.01	07/06/2016
Approved		

Drawing Number **OSIS19BA-40** Iss.
Sheet **1** of **1** Size A3

Rev 1