
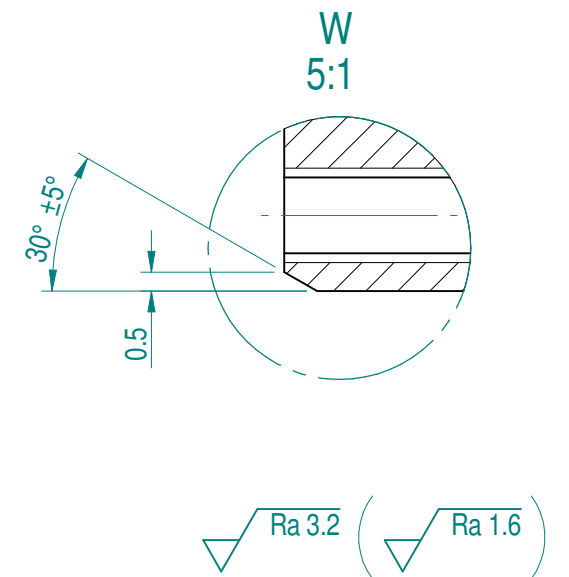
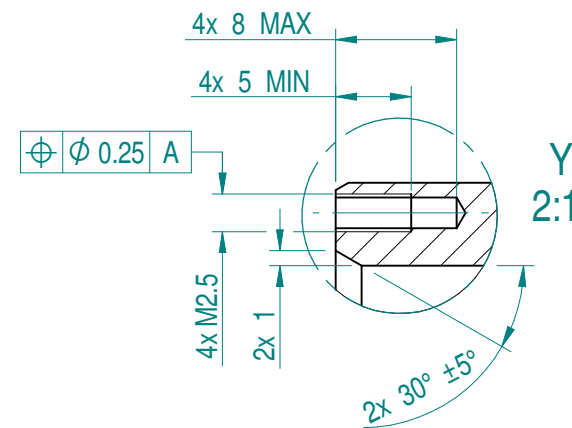
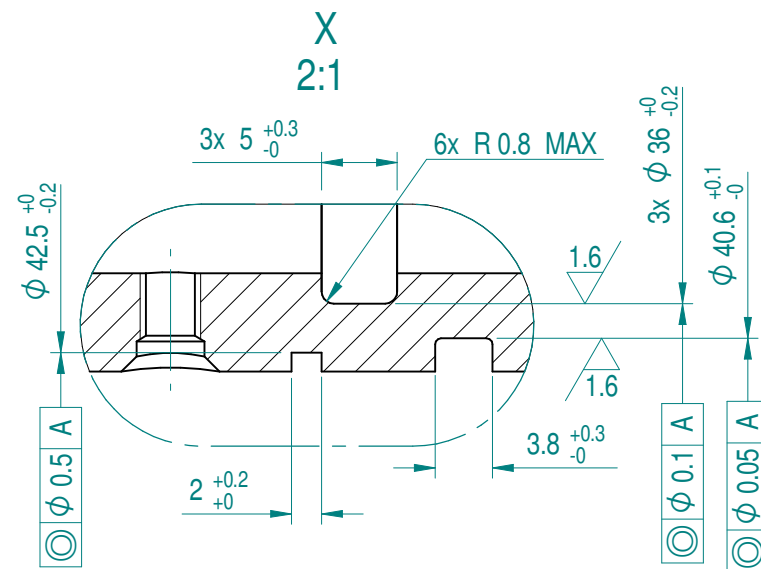
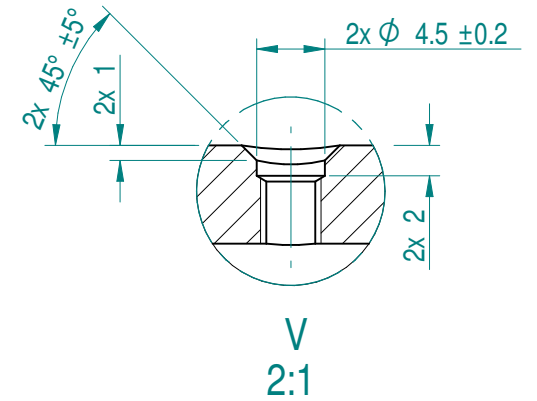
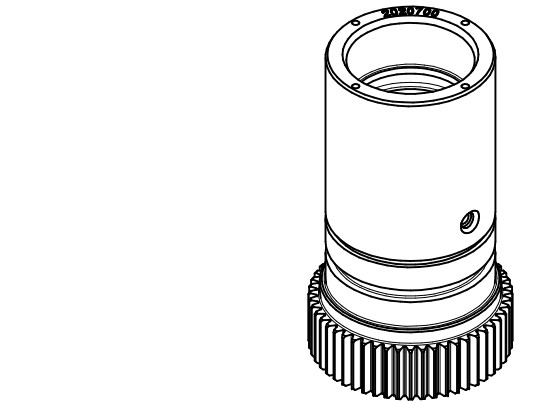
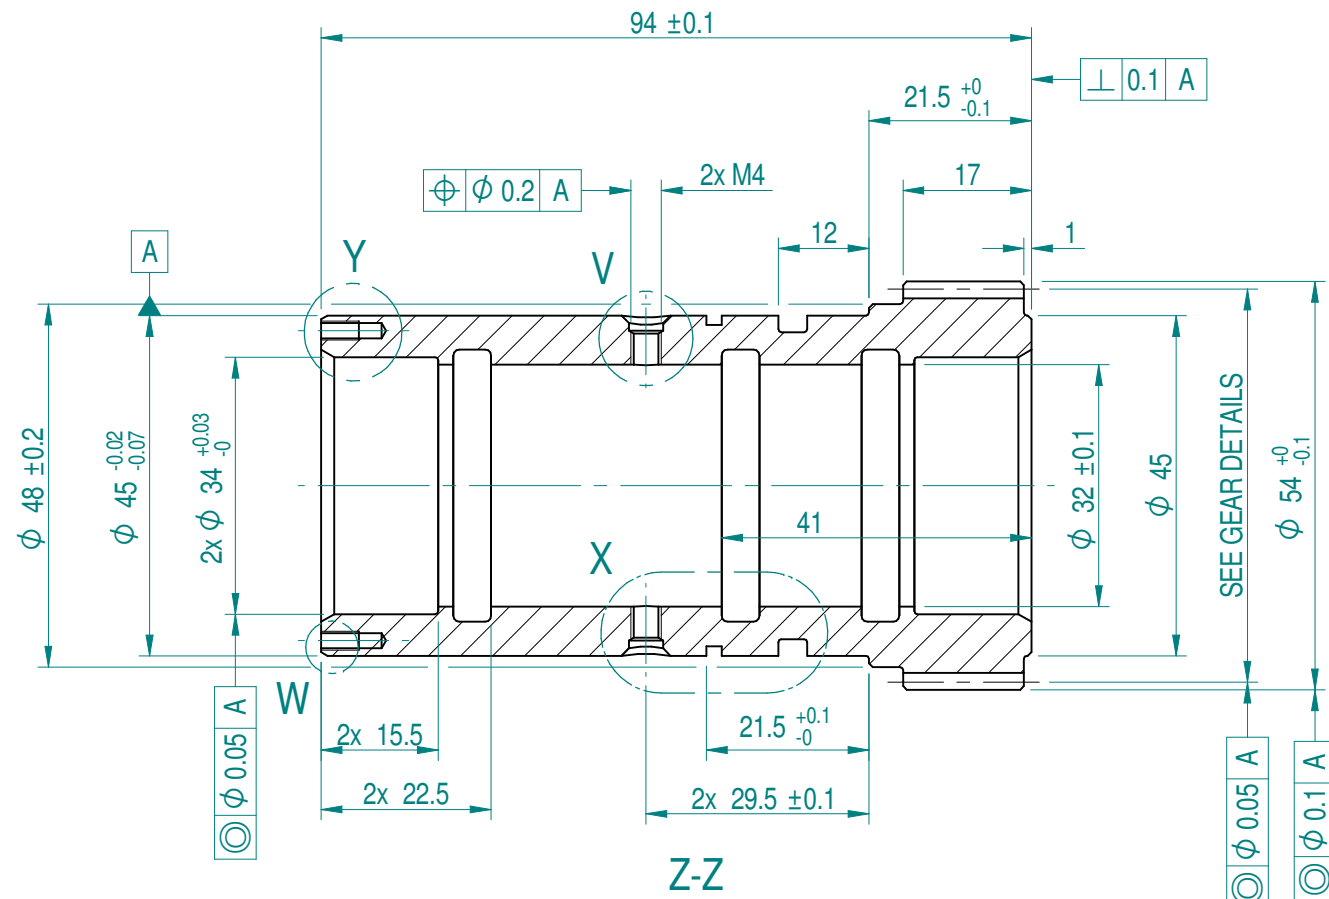


CERTIFIED PRODUCT:
NO MODIFICATIONS PERMITTED WITHOUT THE
APPROVAL OF THE CERTIFICATION ENGINEER

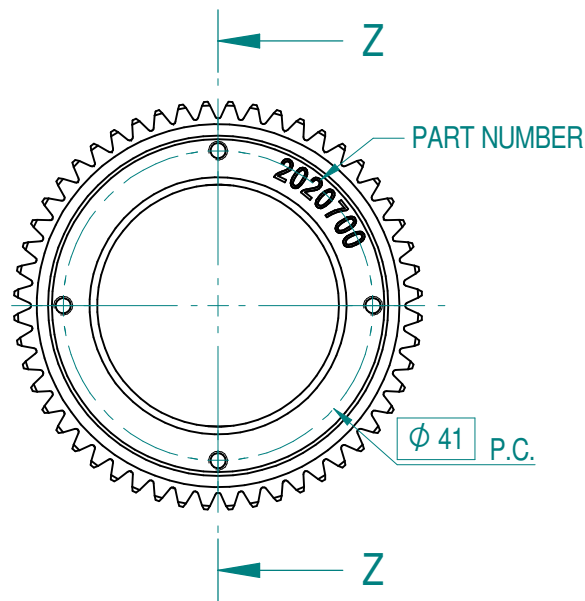

External Cylindrical Gear - ISO 21771:2007	
Module	1
Number Of Teeth	52
Pressure Angle	20°
Helix Angle	n/a
Helical Direction	n/a
Reference Diameter	52.000
Pitch Diameter	52.000
Addendum	1.000
Addendum Modification Coefficient	0.000
Centre Distance	45.500
Span Measurement	16.915 - 0.053
Number Of Teeth Spanned	6

NOTES:
1. ARCOR C OR V1 SURFACE TREATMENT REQUIRED
ON ALL SURFACES BY APPROVED SUPPLIERS ONLY
2. ALL UNSPECIFIED EDGES 0.5 x 45°
3. ALL UNSPECIFIED RADII R0.4

UNLESS OTHERWISE STATED				Material: STEEL BS EN 10083 GRADE C45 OR GB/T 699 GRADE 45 ARCOR C OR V1 SURFACE TREATMENT	
General tolerances to ISO 2768-m Remove all burrs and sharp edges	Linear		Radii/Chamfers	Angles	
	0.5 - 6	± 0.1	(400) - 1000	± 0.8	upto 10 ± 1°
	(6) - 30	± 0.2	(1000) - 2000	± 1.2	(10) - 50 ± 0°30'
	(30) - 120	± 0.3	(2000) - 4000	± 2	(50) - 120 ± 0°20'
				Treatment: -	
rotork Gears Leeds - UK www.rotork.com				Title SPI OUTPUT GEAR WHEEL (Z=52 M=1) - SAFETY RELATED	
				Drawing Number 2020700	
Created J.Dickinson 2017-03-10				Rev 1-0	
Checked S.Watkins 2017-03-15				Mass 0.59 kg	
Approved S.Watkins 2017-03-27				Size A3 Sheet 1 of 1	