
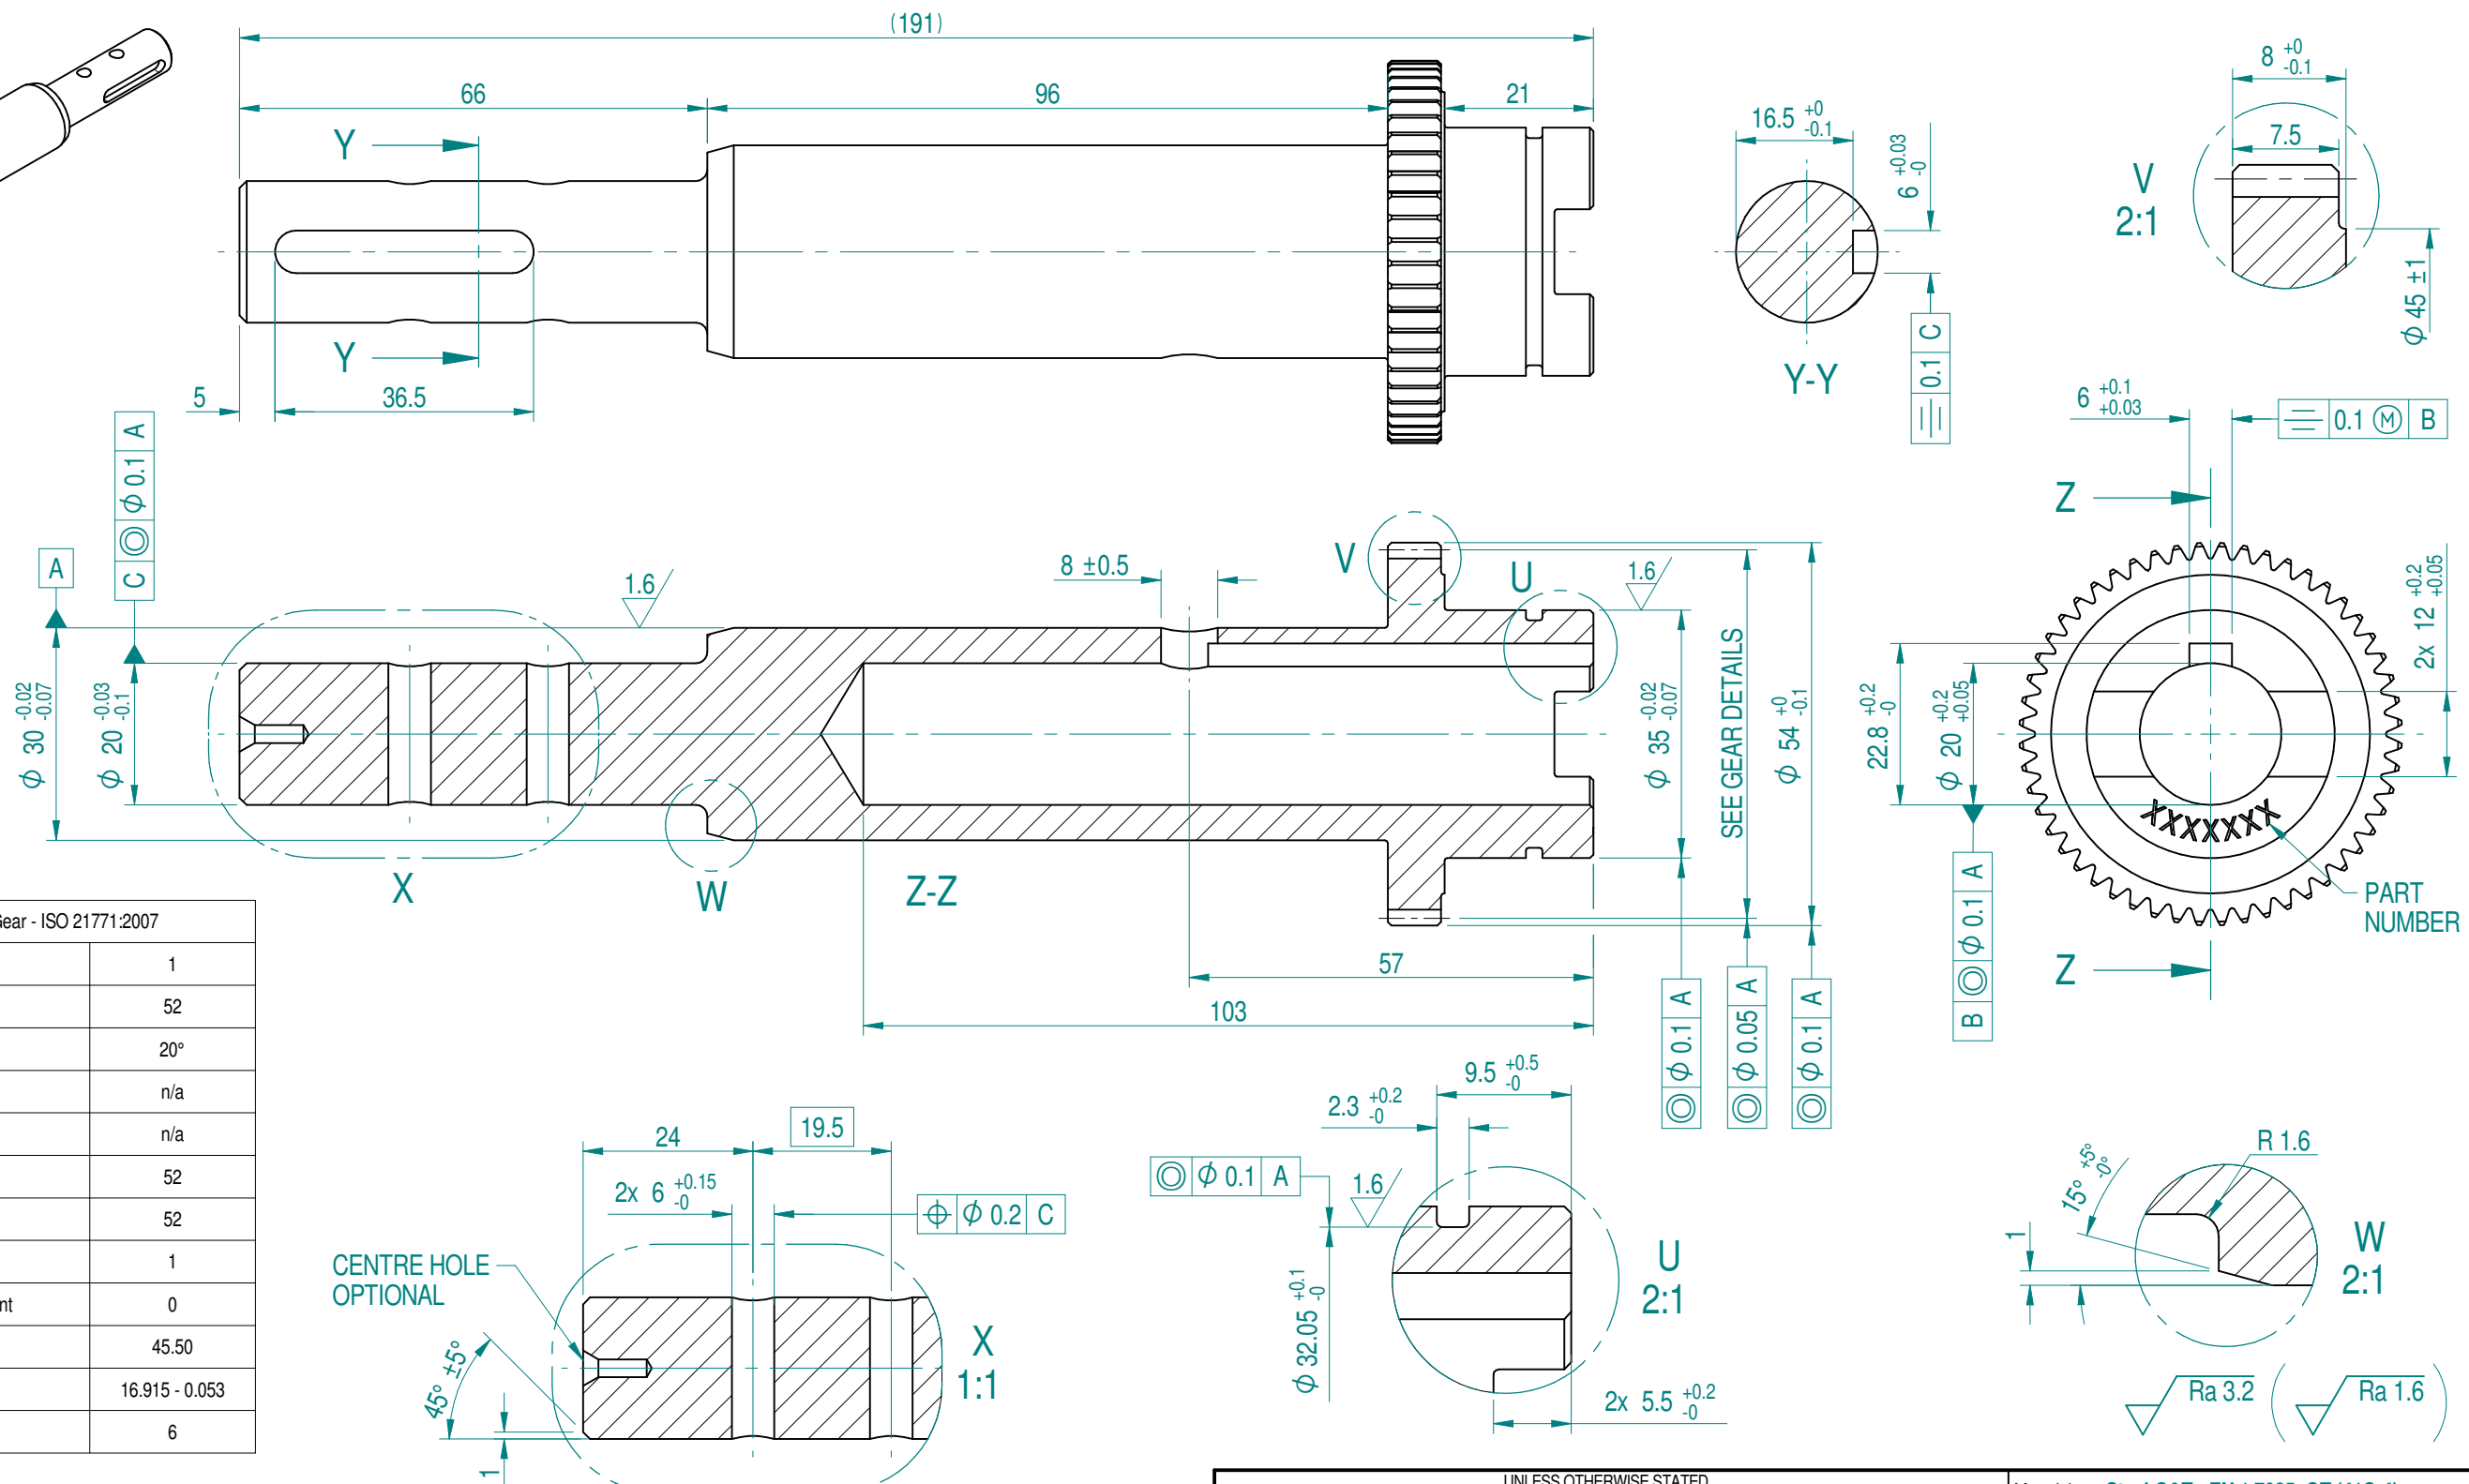



CERTIFIED PRODUCT:
NO MODIFICATIONS PERMITTED WITHOUT THE
APPROVAL OF THE CERTIFICATION ENGINEER

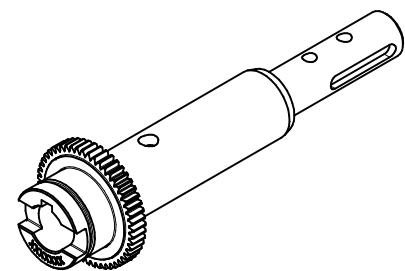

External Cylindrical Gear - ISO 21771:2007	
Module	1
Number Of Teeth	52
Pressure Angle	20°
Helix Angle	n/a
Helical Direction	n/a
Reference Diameter	52
Pitch Diameter	52
Addendum	1
Addendum Modification Coefficient	0
Centre Distance	45.50
Span Measurement	16.915 - 0.053
Number Of Teeth Spanned	6

- NOTES:
- ARCOR C OR V1 SURFACE TREATMENT REQUIRED ON ALL SURFACES BY APPROVED SUPPLIERS ONLY
 - CHINA EQUIVALENT MATERIAL GB/T 3077 40Cr QUENCH AND TEMPERED
Re Min 525MPa, HB 201-255 (BS970 R CONDITION EQUIVALENT)
 - ALL UNSPECIFIED EDGES 0.5 x 45°
 - ALL UNSPECIFIED RADII R0.4

1-0	-	J.Dickinson	S.Watkins	2018-07-27	EC1300 - Hardness range of material updated
Rev	ECN	Revised	Rev. Approved	Date	Change Description

UNLESS OTHERWISE STATED						Material: Steel Q&T - EN 1.7035+QT (41Cr4)			
General tolerances to ISO 2768-m Remove all burrs and sharp edges	Linear			Radii/Chamfers		Angles		Treatment: -	
	0.5 - 6	± 0.1	(400) - 1000	± 0.8	0.5 - 3	± 0.2	upto 10		± 1°
	(6) - 30	± 0.2	(1000) - 2000	± 1.2	(3) - 6	± 0.5	(10) - 50		± 0°30'
	(30) - 120	± 0.3	(2000) - 4000	± 2	Over 6	± 1	(50) - 120		± 0°20'
	(120) - 400	± 0.5							
rotork® Gears Leeds - UK www.rotork.com						Title		SPI INPUT GEAR WHEEL (Z=52 M=1) 40Cr - SAFETY RELATED	
						Dimensions in mm			
						Scale 1:2			
© This drawing is confidential and is the property of Rotork Gears and must not be reproduced either wholly or partly. All rights in respect of patents, designs and copyrights are reserved. © 2018				Created	M.Knapton	2018-03-15	Drawing Number		Rev 1-0
				Checked			2025397		
				Approved	S.Watkins	2018-03-22	Mass 0.69 kg	Size A3	