
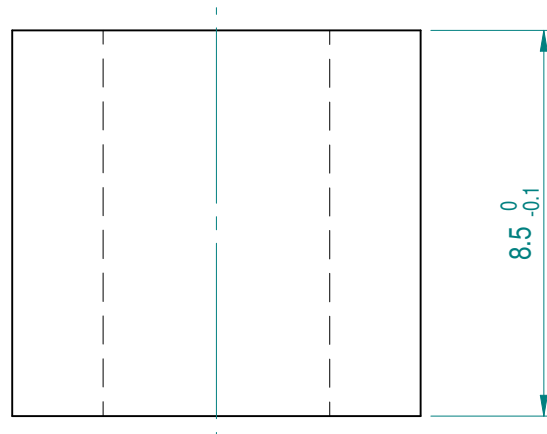



All unspecified edges and
radii will be machined acc.
0.5x45° and R=0.5 mm

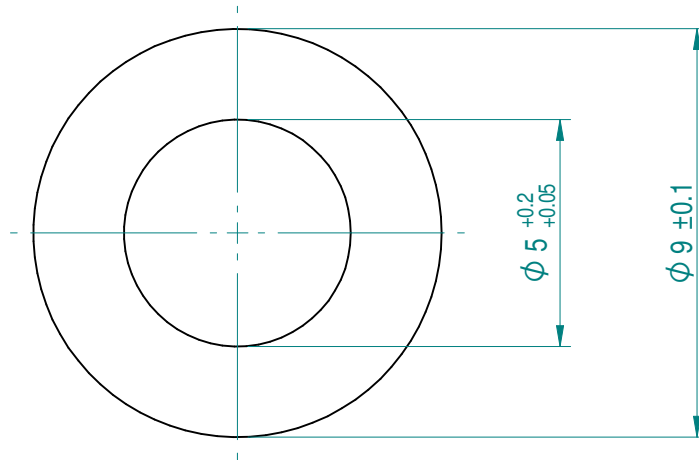

NOTES:

1. To suit ECL 1, 2, 3 and 4
- 2.
- 3.
- 4.
- 5.

Ra 3.2

1-0	-	S.Watkins	S.Watkins	2017-05-03	EC1096 (add EN3B as an alternative material)				
Rev	ECN	Revised	Rev. Approved	Date	Change Description				
UNLESS OTHERWISE STATED									
General tolerances to ISO 2768-m Remove all burrs and sharp edges	Linear			Radii/Chamfers	Angles		Material: Steel S235JR (1.0037 / EN10025) or Q235 or EN3B (070M20)		
	0.5 - 6	± 0.1	(400) - 1000 ± 0.8	0.5 - 3 ± 0.2	upto 10	± 1°			
	(6) - 30	± 0.2	(1000) - 2000 ± 1.2	(3) - 6 ± 0.5	(10) - 50	± 0°30'			
	(30) - 120	± 0.3	(2000) - 4000 ± 2	Over 6 ± 1	(50) - 120	± 0°20'			
	(120) - 400	± 0.5					Treatment: -		
rotork® Gears Leeds - UK www.rotork.com			This drawing is confidential and is the property of Rotork Gears and must not be reproduced either wholly or partly. All rights in respect of patents, designs and copyrights are reserved. © 2017					Title	
								SPACER H= 8.5mm	
						Dimensions in mm		Scale 6:1	
Created	Robbin.Goosen		2014-10-30		ECL-00077-1		1-0		
Checked	Henk.Hoff		2014-10-30						
Approved	S.Watkins		2016-11-28		Mass	0.003 kg	Size	A4	
					Sheet	1	of	1	