
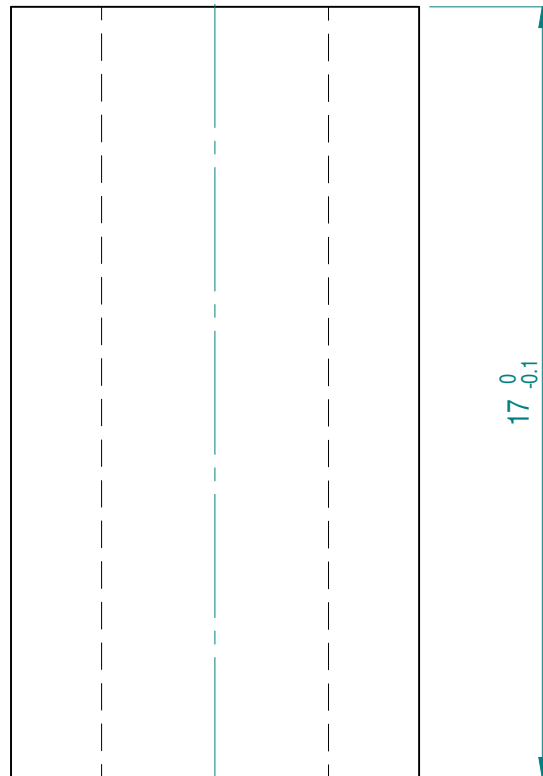


All unspecified edges and radii will be machined acc. 0.5x45° and R=0.5 mm

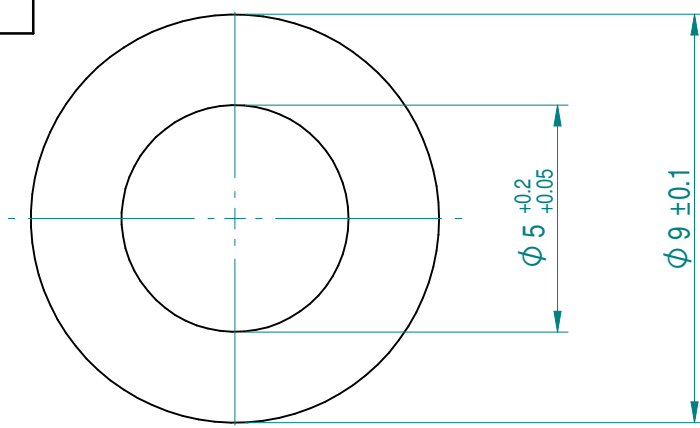

NOTES:

1. To suit ECL 1, 2, 3 and 4
- 2.
- 3.
- 4.
- 5.

Ra 3.2

1-0	-	S.Watkins	S.Watkins	2017-05-03	EC1096 (add EN3B as an alternative material)
Rev	ECN	Revised	Rev. Approved	Date	Change Description
UNLESS OTHERWISE STATED					
General tolerances to ISO 2768-m Remove all burrs and sharp edges	Linear			Radii/Chamfers	Angles
	0.5 - 6	± 0.1	(400) - 1000 ± 0.8	0.5 - 3 ± 0.2 (3) - 6 ± 0.5 Over 6 ± 1	upto 10 ± 1° (10) - 50 ± 0°30' (50) - 120 ± 0°20'
		(6) - 30 ± 0.2 (30) - 120 ± 0.3 (120) - 400 ± 0.5	(1000) - 2000 ± 1.2 (2000) - 4000 ± 2	Material: Steel S235JR (1.0037 / EN10025) or Q235 or EN3B (070M20)	
					Treatment: -
rotork® Gears Leeds - UK www.rotork.com		This drawing is confidential and is the property of Rotork Gears and must not be reproduced either wholly or partly. All rights in respect of patents, designs and copyrights are reserved. © 2016			
				Dimensions in mm Scale 6:1	
		Created Robbin.Goosen		2014-10-30	Title SPACER H= 17 mm
		Checked Henk.Hoff		2014-10-30	
		Approved S.Watkins		2016-11-28	Drawing Number ECL-00079-1
				Mass 0.01 kg	Size A4
				Sheet 1	of 1