
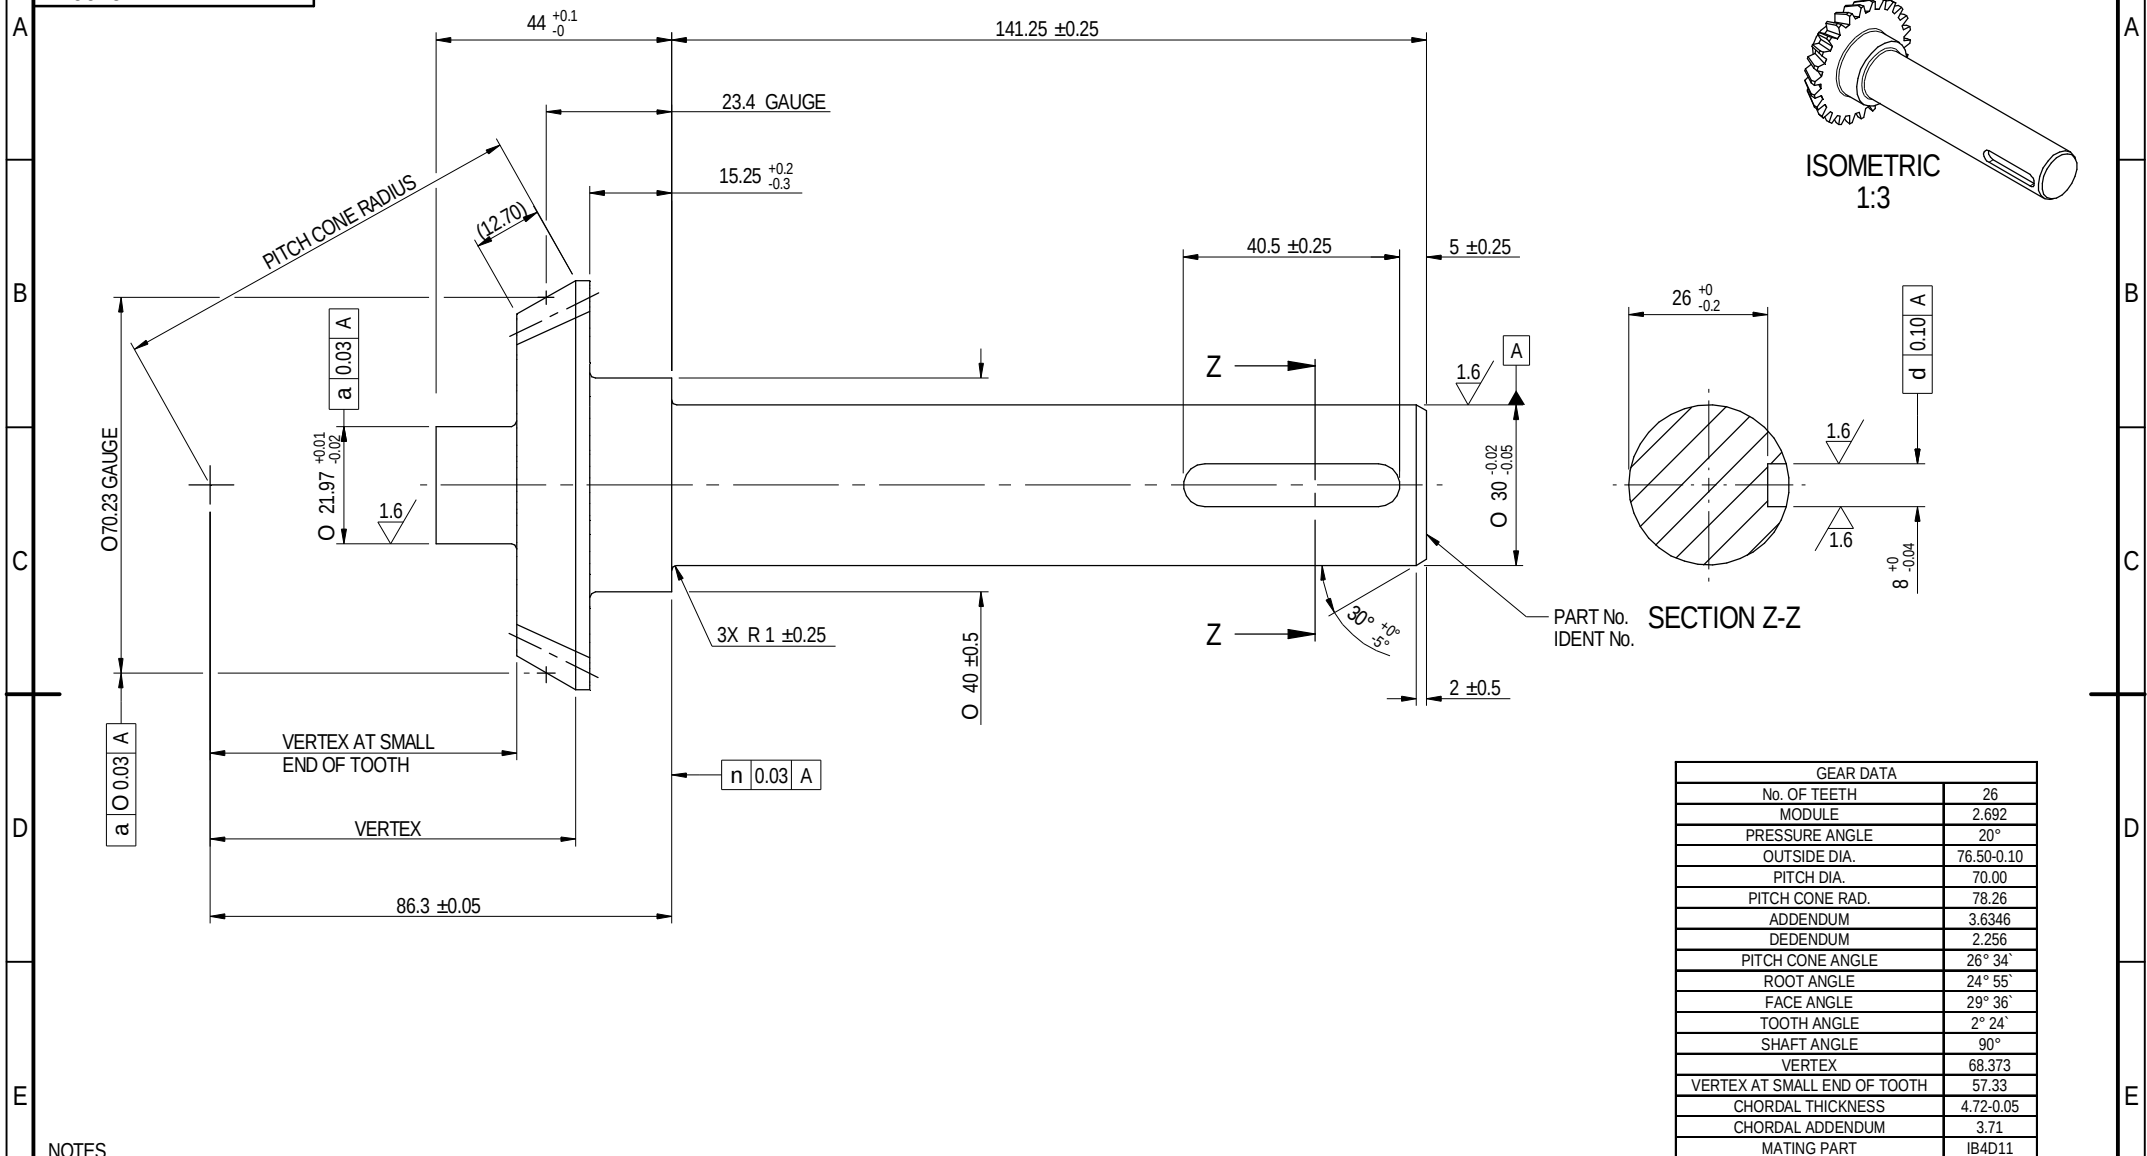




GEAR DATA	
No. OF TEETH	26
MODULE	2.692
PRESSURE ANGLE	20°
OUTSIDE DIA.	76.50-0.10
PITCH DIA.	70.00
PITCH CONE RAD.	78.26
ADDENDUM	3.6346
DEDENDUM	2.256
PITCH CONE ANGLE	26° 34'
ROOT ANGLE	24° 55'
FACE ANGLE	29° 36'
TOOTH ANGLE	2° 24'
SHAFT ANGLE	90°
VERTEX	68.373
VERTEX AT SMALL END OF TOOTH	57.33
CHORDAL THICKNESS	4.72-0.05
CHORDAL ADDENDUM	3.71
MATING PART	IB4D11

NOTES
1. ARCOR C OR V1 SURFACE TREATMENT REQUIRED ON ALL SURFACES BY APPROVED SUPPLIERS ONLY

							Unless otherwise stated : General tolerances to ISO 2768-m Machined surface finish: 3.2 µm Ra Remove all burrs and sharp edges	Linear 0.5 - 6 ± 0.1 (6) - 30 ± 0.2 (30) - 120 ± 0.3	(120) - 400 ± 0.5 (400) - 1000 ± 0.8 (1000) - 2000 ± 1.2 (2000) - 4000 ± 2.0	Radii/Chamfers 0.5 - 3 ± 0.2 (3) - 6 ± 0.5 over 6 ± 1	Angles upto 10 ± 1° (10) - 50 ± 0.5° (50) - 120 ± 0.33°	Material STEEL BS970 817M40T (EN24T) or GB3077-88 GRADE 40Cr Rm 850 to 1000 N/mm ² , Re min 680 n/mm ² , 248 to 302 HB Made From MAY BE MADE FROM IB4A451
							 This drawing is confidential and is the property of Rotork Gears and must not be reproduced either wholly or partly. All rights in respect of patents, designs and copyrights are reserved. © 2014 Leeds - UK www.rotork.com	Document Type DETAIL DRAWING		Mass 1.32 kg	Title INPUT SHAFT & GEAR 2:1 ARCOR C TREATED TO SUIT HOB GEARBOX REF:UG145701	
										Dimensions in mm Scale 1:5		
								Created	S DAVE	04/09/2014	Drawing Number	
								Checked	C FLESHER	09/09/2014	IB-00167-1	
								Approved			Sheet 1 of 1 Size A3	
A	-	-	-	-	04/09/2014	FIRST ISSUE						Iss. A
Iss.	EC	Revised	Checked	Approved	Date	Change Description						