
IB10D06

ISSUE	ALTERATIONS
A	ORIGINAL ISSUE
7	REDRAWN ON AUTOCAD ITCAD 4.2.92
8	CN911 B.T. 6.2.98

EXEECO LTD © 1984

THIRD ANGLE PROJECTION
DO NOT SCALE

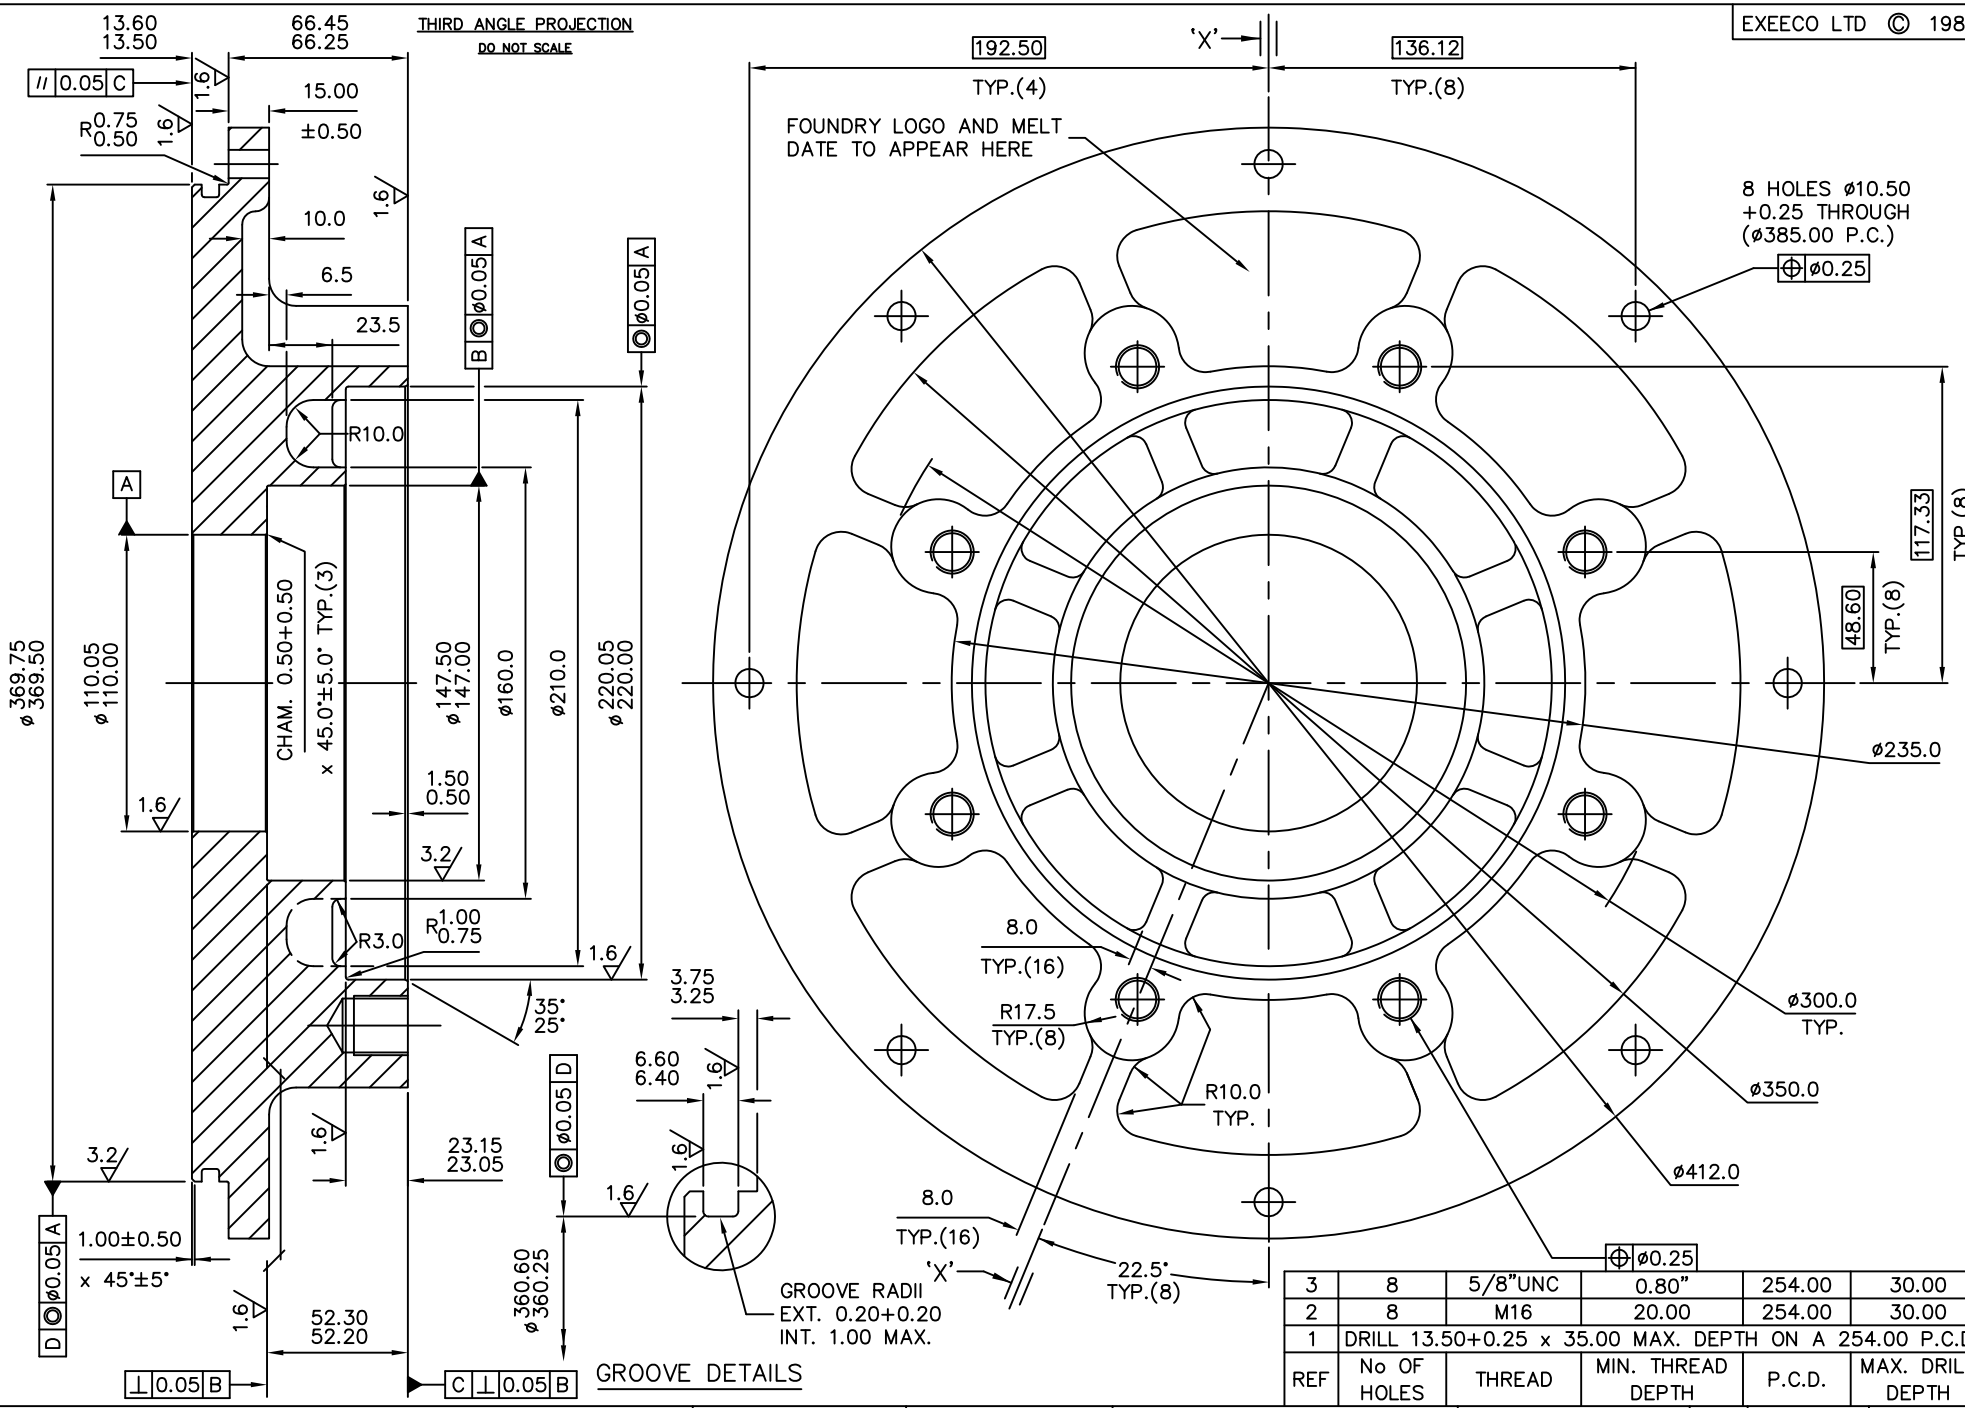

REF	No OF HOLES	THREAD	MIN. THREAD DEPTH	P.C.D.	MAX. DRILL DEPTH
3	8	5/8"UNC	0.80"	254.00	30.00
2	8	M16	20.00	254.00	30.00
1	DRILL 13.50+0.25 x 35.00 MAX. DEPTH ON A 254.00 P.C.D.				

EXEECO LTD
REGINA HOUSE
RING ROAD
BRAMLEY
LEEDS
WEST YORKS

UNLESS OTHERWISE STATED:
(1) ALL DIMENSIONS IN MILLIMETRES
(2) ALL LINEAR DIMENSIONS TO ±0.75 (CAST)
(3) ALL ANGULAR DIMENSIONS TO ±1.0° (DRAW)
(4) ALL UNSPECIFIED RADII 5.0 (CAST)
(5) REMOVE ALL SHARP EDGES 0.50 MAX. (M/C)
(6) ALL HOLE CENTRES TO BE WITHIN 0.25 OF TRUE POSITION
(7) SURFACES MARKED ✓ TO BE MACHINED AND A MACHINING ALLOWANCE OF 3.0 ON DIAS AND OF 1.5 ON FACES TO BE CAST ON
(8) SURFACE FINISH TO BE OF GOOD FOUNDRY PRACTICE
(9) MACHINING ALL OVER TO ✓ MICRO METRES
(10) ALL GEOMETRIC TOLERANCES ARE T.I.R.

ISO SYMBOLS
⊕ POSITIONAL TOLERANCE
◎ CONCENTRICITY TOLERANCE
⊥ SQUARENESS TOLERANCE
// PARALLELISM TOLERANCE
= SYMMETRY TOLERANCE
() REF DIMENSIONS ONLY
▭ BASIC DIMENSIONS ONLY
Ø DIAMETER

MATERIAL :– SNG IRON TO BS2789 GRADE 420/12 (USE CASTING W–IB10D06)
DRAWN:– ITCAD 4.2.92
CHECKED:–
SCALE 1:1
HEAT TREATMENT
PROTECTIVE TREATMENT
SUITABLY PROTECT FOR STORAGE
PROJECT :– IB10 FORM A F25/G4

BASEPLATE

IB10D06