IB5D11	
ISSUE	ALTERATIONS
A	ORIGINAL ISSUE
B	
1	
2	CN341 A.B. 3.11.89 SEALED STANDARD
3	CN868 B.T. 2.1.97
4	CN2176 J.P. 07.02.2011

THIRD ANGLE PROJECTION

DO NOT SCALE

EXEECO LTD © 1984

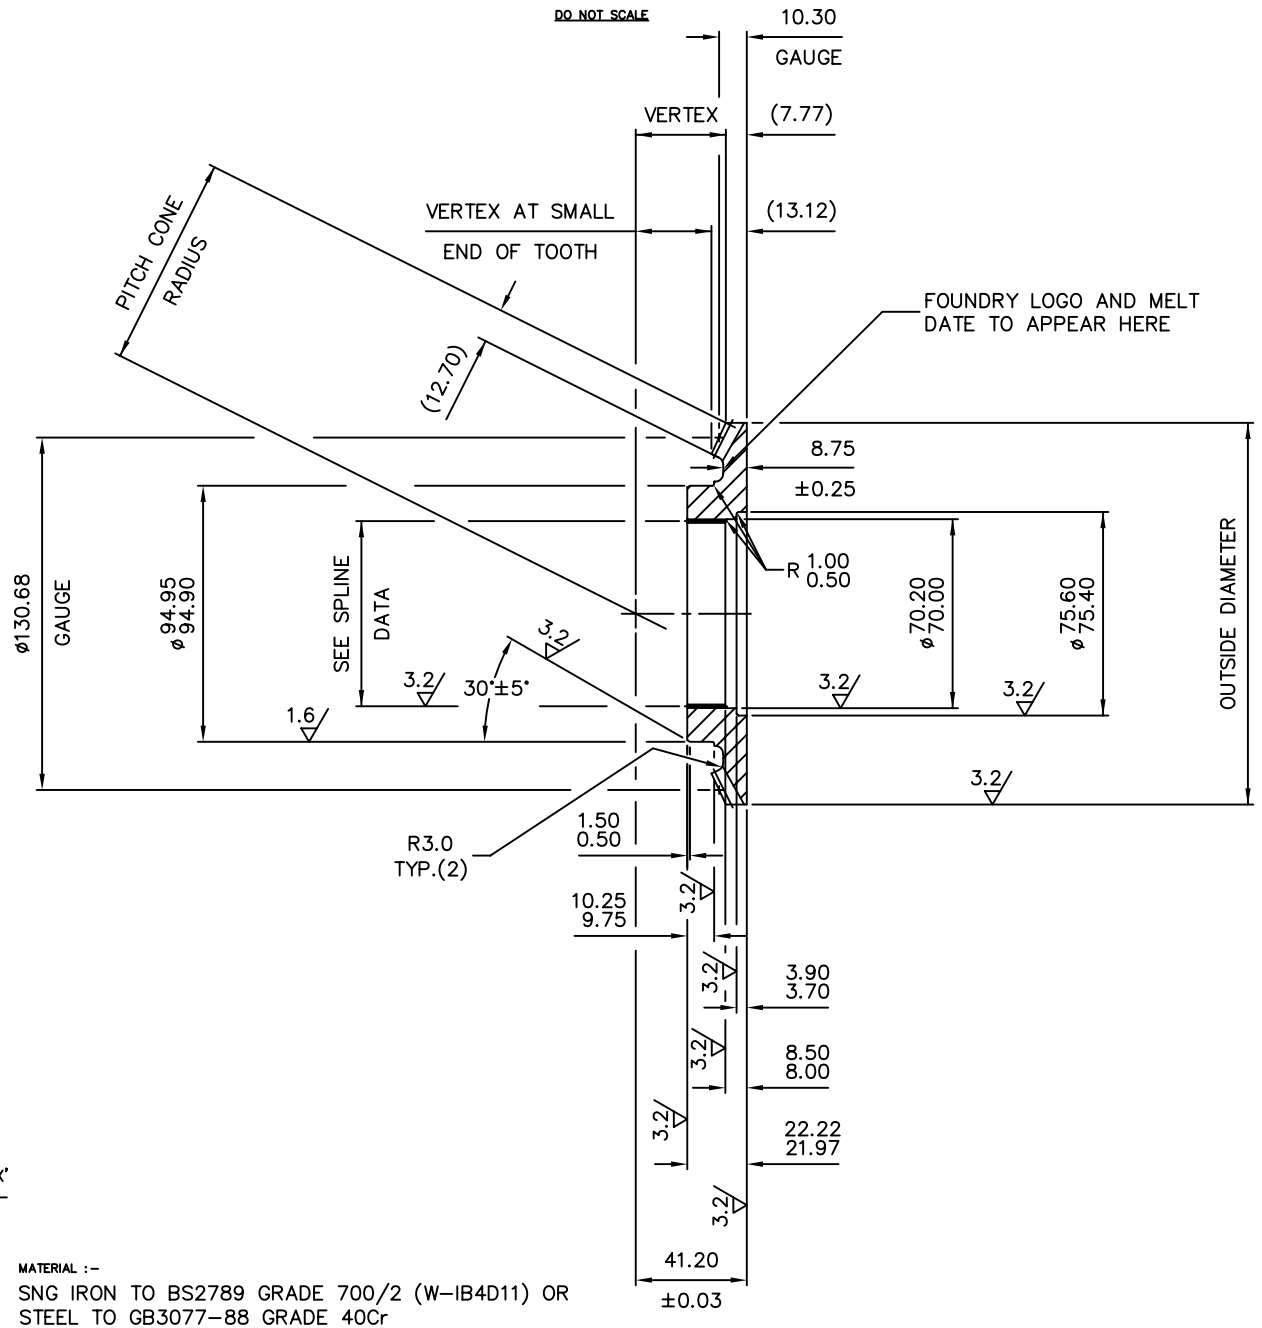

SPLINE DATA	
PRESSURE ANGLE	30°
MAJOR DIA.	70.11–0.26
FORM DIA.	69.62
MINOR DIA.	67.31+0.10
SPACE WIDTH MAX. ACT.	2.08
SPACE WIDTH MIN. EFF.	1.96
FILLET RAD.	0.23
PIN DIA.	2.18
FLAT DIM'N 'X'	2.11
DIM'N BETWEEN PINS	65.58±0.05
No. OF SPLINES 54	20/40 PITCH
INVOLUTE FLAT ROOT	SIDE FIT

MATERIAL :-

SNG IRON TO BS2789 GRADE 700/2 (W–IB4D11) OR
STEEL TO GB3077–88 GRADE 40Cr
Rm 850 to 1000 N/mm2, Re min 680 N/mm2, 248 to 302 HB

MAY BE MADE FROM IB4D11

GEAR DATA	
No. OF TEETH	52
MODULE	2.692
PRESSURE ANGLE	20°
OUTSIDE DIA.	141.56–0.10
PITCH DIA.	140.00
PITCH CONE RAD.	78.26
ADDENDUM	1.749
DEDENDUM	4.14
PITCH CONE ANGLE	63° 26'
ROOT ANGLE	60° 24'
FACE ANGLE	65° 5'
TOOTH ANGLE	2° 24'
SHAFT ANGLE	90°
VERTEX	33.43
VERTEX AT SMALL END OF TOOTH	28.08
CHORDAL THICKNESS	3.62–0.05
CHORDAL ADDENDUM	1.76
MATING PART	IB4C19

EXEECO LTD
REGINA HOUSE
RING ROAD
BRAMLEY
LEEDS
WEST YORKS

UNLESS OTHERWISE STATED:

(1) ALL DIMENSIONS IN MILLIMETRES
(2) ALL LINEAR DIMENSIONS TO BE ±0.75 (CAST)
(3) ALL ANGULAR DIMENSIONS TO BE ±1° (DRAW)
(4) ALL UNSPECIFIED RADII
(5) REMOVE ALL SHARP EDGES 0.50 MAX. (M/C)
(6) ALL HOLE CENTRES TO BE WITHIN OF TRUE POSITION
(7) SURFACES MARKED ✓ TO BE MACHINED AND A MACHINING ALLOWANCE OF 3.0 ON DIAS AND OF 1.5 ON FACES TO BE CAST ON
(8) SURFACE FINISH TO BE OF GOOD FOUNDRY PRACTICE.
(9) MACHINING ALL OVER TO ✓ MICRO METRES
(10) ALL GEOMETRIC TOLERANCES ARE T.I.R.

ISO SYMBOLS

⌖ POSITIONAL TOLERANCE
◎ CONCENTRICITY TOLERANCE
⊥ SQUARENESS TOLERANCE
// PARALLELISM TOLERANCE
⌯ SYMMETRY TOLERANCE
( ) REF DIMENSIONS ONLY
▭ BASIC DIMENSIONS ONLY
Ø DIAMETER

PROJECT :- IB5

DRAWN:- J.W. 12.4.84
CHECKED:- C.F. 14.02.11
SCALE 1:1
HEAT TREATMENT
PROTECTIVE TREATMENT SUITABLY PROTECT FOR STORAGE

BEVEL GEAR 2:1

IB5D11