


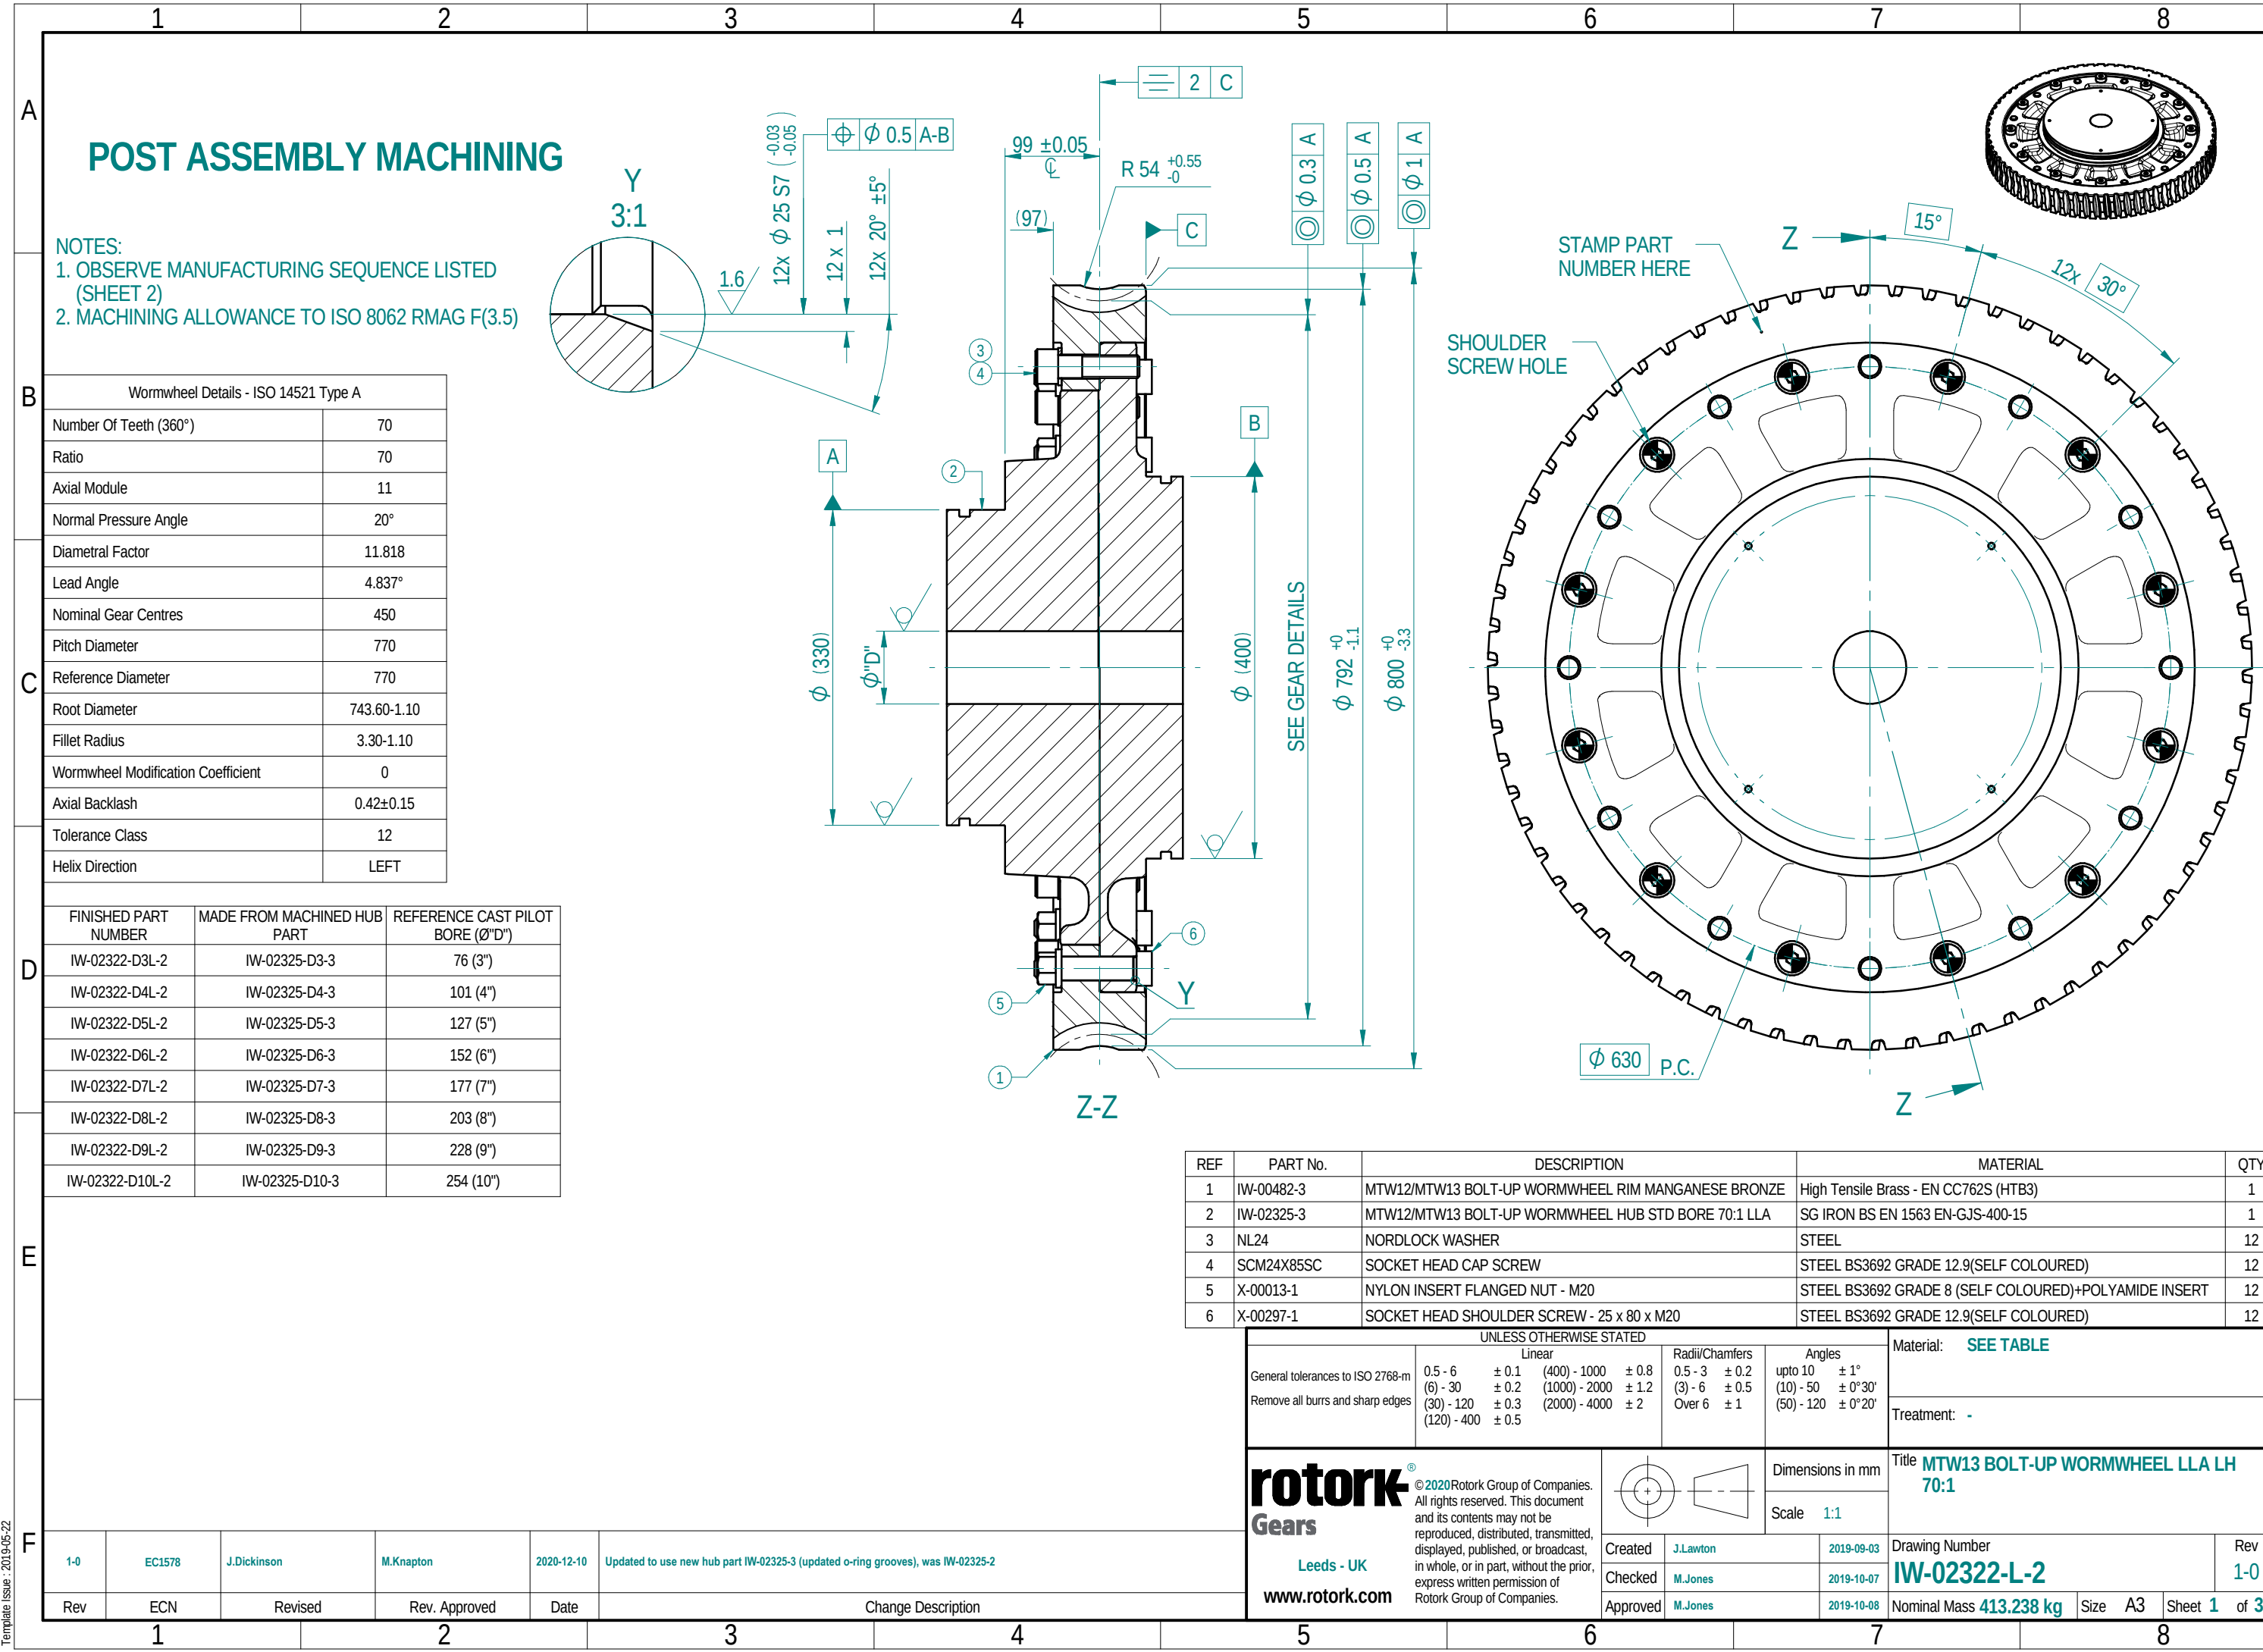

POST ASSEMBLY MACHINING

- NOTES:
1. OBSERVE MANUFACTURING SEQUENCE LISTED (SHEET 2)
2. MACHINING ALLOWANCE TO ISO 8062 RMAG F(3.5)

Wormwheel Details - ISO 14521 Type A	
Number Of Teeth (360°)	70
Ratio	70
Axial Module	11
Normal Pressure Angle	20°
Diametral Factor	11.818
Lead Angle	4.837°
Nominal Gear Centres	450
Pitch Diameter	770
Reference Diameter	770
Root Diameter	743.60-1.10
Fillet Radius	3.30-1.10
Wormwheel Modification Coefficient	0
Axial Backlash	0.42±0.15
Tolerance Class	12
Helix Direction	LEFT


FINISHED PART NUMBER	MADE FROM MACHINED HUB PART	REFERENCE CAST PILOT BORE (Ø"D")
IW-02322-D3L-2	IW-02325-D3-3	76 (3")
IW-02322-D4L-2	IW-02325-D4-3	101 (4")
IW-02322-D5L-2	IW-02325-D5-3	127 (5")
IW-02322-D6L-2	IW-02325-D6-3	152 (6")
IW-02322-D7L-2	IW-02325-D7-3	177 (7")
IW-02322-D8L-2	IW-02325-D8-3	203 (8")
IW-02322-D9L-2	IW-02325-D9-3	228 (9")
IW-02322-D10L-2	IW-02325-D10-3	254 (10")

REF	PART No.	DESCRIPTION	MATERIAL	QTY
1	IW-00482-3	MTW12/MTW13 BOLT-UP WORMWHEEL RIM MANGANESE BRONZE	High Tensile Brass - EN CC762S (HTB3)	1
2	IW-02325-3	MTW12/MTW13 BOLT-UP WORMWHEEL HUB STD BORE 70:1 LLA	SG IRON BS EN 1563 EN-GJS-400-15	1
3	NL24	NORDLOCK WASHER	STEEL	12
4	SCM24X85SC	SOCKET HEAD CAP SCREW	STEEL BS3692 GRADE 12.9(SELF COLOURED)	12
5	X-00013-1	NYLON INSERT FLANGED NUT - M20	STEEL BS3692 GRADE 8 (SELF COLOURED)+POLYAMIDE INSERT	12
6	X-00297-1	SOCKET HEAD SHOULDER SCREW - 25 x 80 x M20	STEEL BS3692 GRADE 12.9(SELF COLOURED)	12

UNLESS OTHERWISE STATED				Material: SEE TABLE
General tolerances to ISO 2768-m	Linear	Radii/Chamfers	Angles	
Remove all burrs and sharp edges	0.5 - 6 ± 0.1 (6) - 30 ± 0.2 (30) - 120 ± 0.3 (120) - 400 ± 0.5	(400) - 1000 ± 0.8 (1000) - 2000 ± 1.2 (2000) - 4000 ± 2 Over 6 ± 1	upto 10 ± 1° (10) - 50 ± 0°30' (50) - 120 ± 0°20'	Treatment: -

rotork® Gears Leeds - UK www.rotork.com	©2020 Rotork Group of Companies. All rights reserved. This document and its contents may not be reproduced, distributed, transmitted, displayed, published, or broadcast, in whole, or in part, without the prior, express written permission of Rotork Group of Companies.				Dimensions in mm		Title MTW13 BOLT-UP WORMWHEEL LLA LH 70:1		
					Scale 1:1				
	Created	J.Lawton	2019-09-03		Drawing Number			Rev	
	Checked	M.Jones	2019-10-07		IW-02322-L-2			1-0	
	Approved	M.Jones	2019-10-08		Nominal Mass 413.238 kg		Size A3	Sheet 1	of 3

BOLT TIGHTENING TORQUE ORDER				
TORQUE $\pm$ 10 Nm	660 Nm	825 Nm	960 Nm	960 Nm
BOLT #1	1	13	25	37
BOLT #2	2	14	26	38
BOLT #3	3	15	27	39
BOLT #4	4	16	28	40
BOLT#5	5	17	29	41
BOLT#6	6	18	30	42
BOLT#7	7	19	31	43
BOLT#8	8	20	32	44
BOLT#9	9	21	33	45
BOLT#10	10	22	34	46
BOLT#11	11	23	35	47
BOLT#12	12	24	36	48

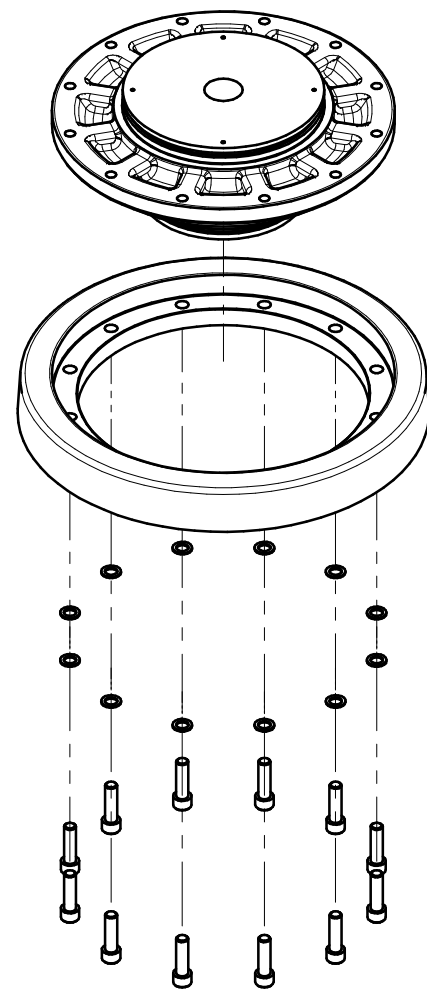

STEP 1

ASSEMBLE RIM TO HUB WITH BOLTS AND NORDLOCK WASHERS

STEP 5
FIT SHOULDER SCREW NUTS, TIGHTEN TO 346 ± 10 Nm
NUT MAY TIGHTEN AGAINST EITHER HUB FACE OR SCREW SHOULDER

STEP 3

DRILL AND REAM SHOULDER SCREW HOLES

STEP 4


PRESS FIT SHOULDER SCREWS
NOTE ORIENTATION (SHEET 1)

STEP 6


MACHINE GEAR OUTSIDE DIAMETER AND THROAT DIAMETER

STEP 7

CUT GEAR TEETH

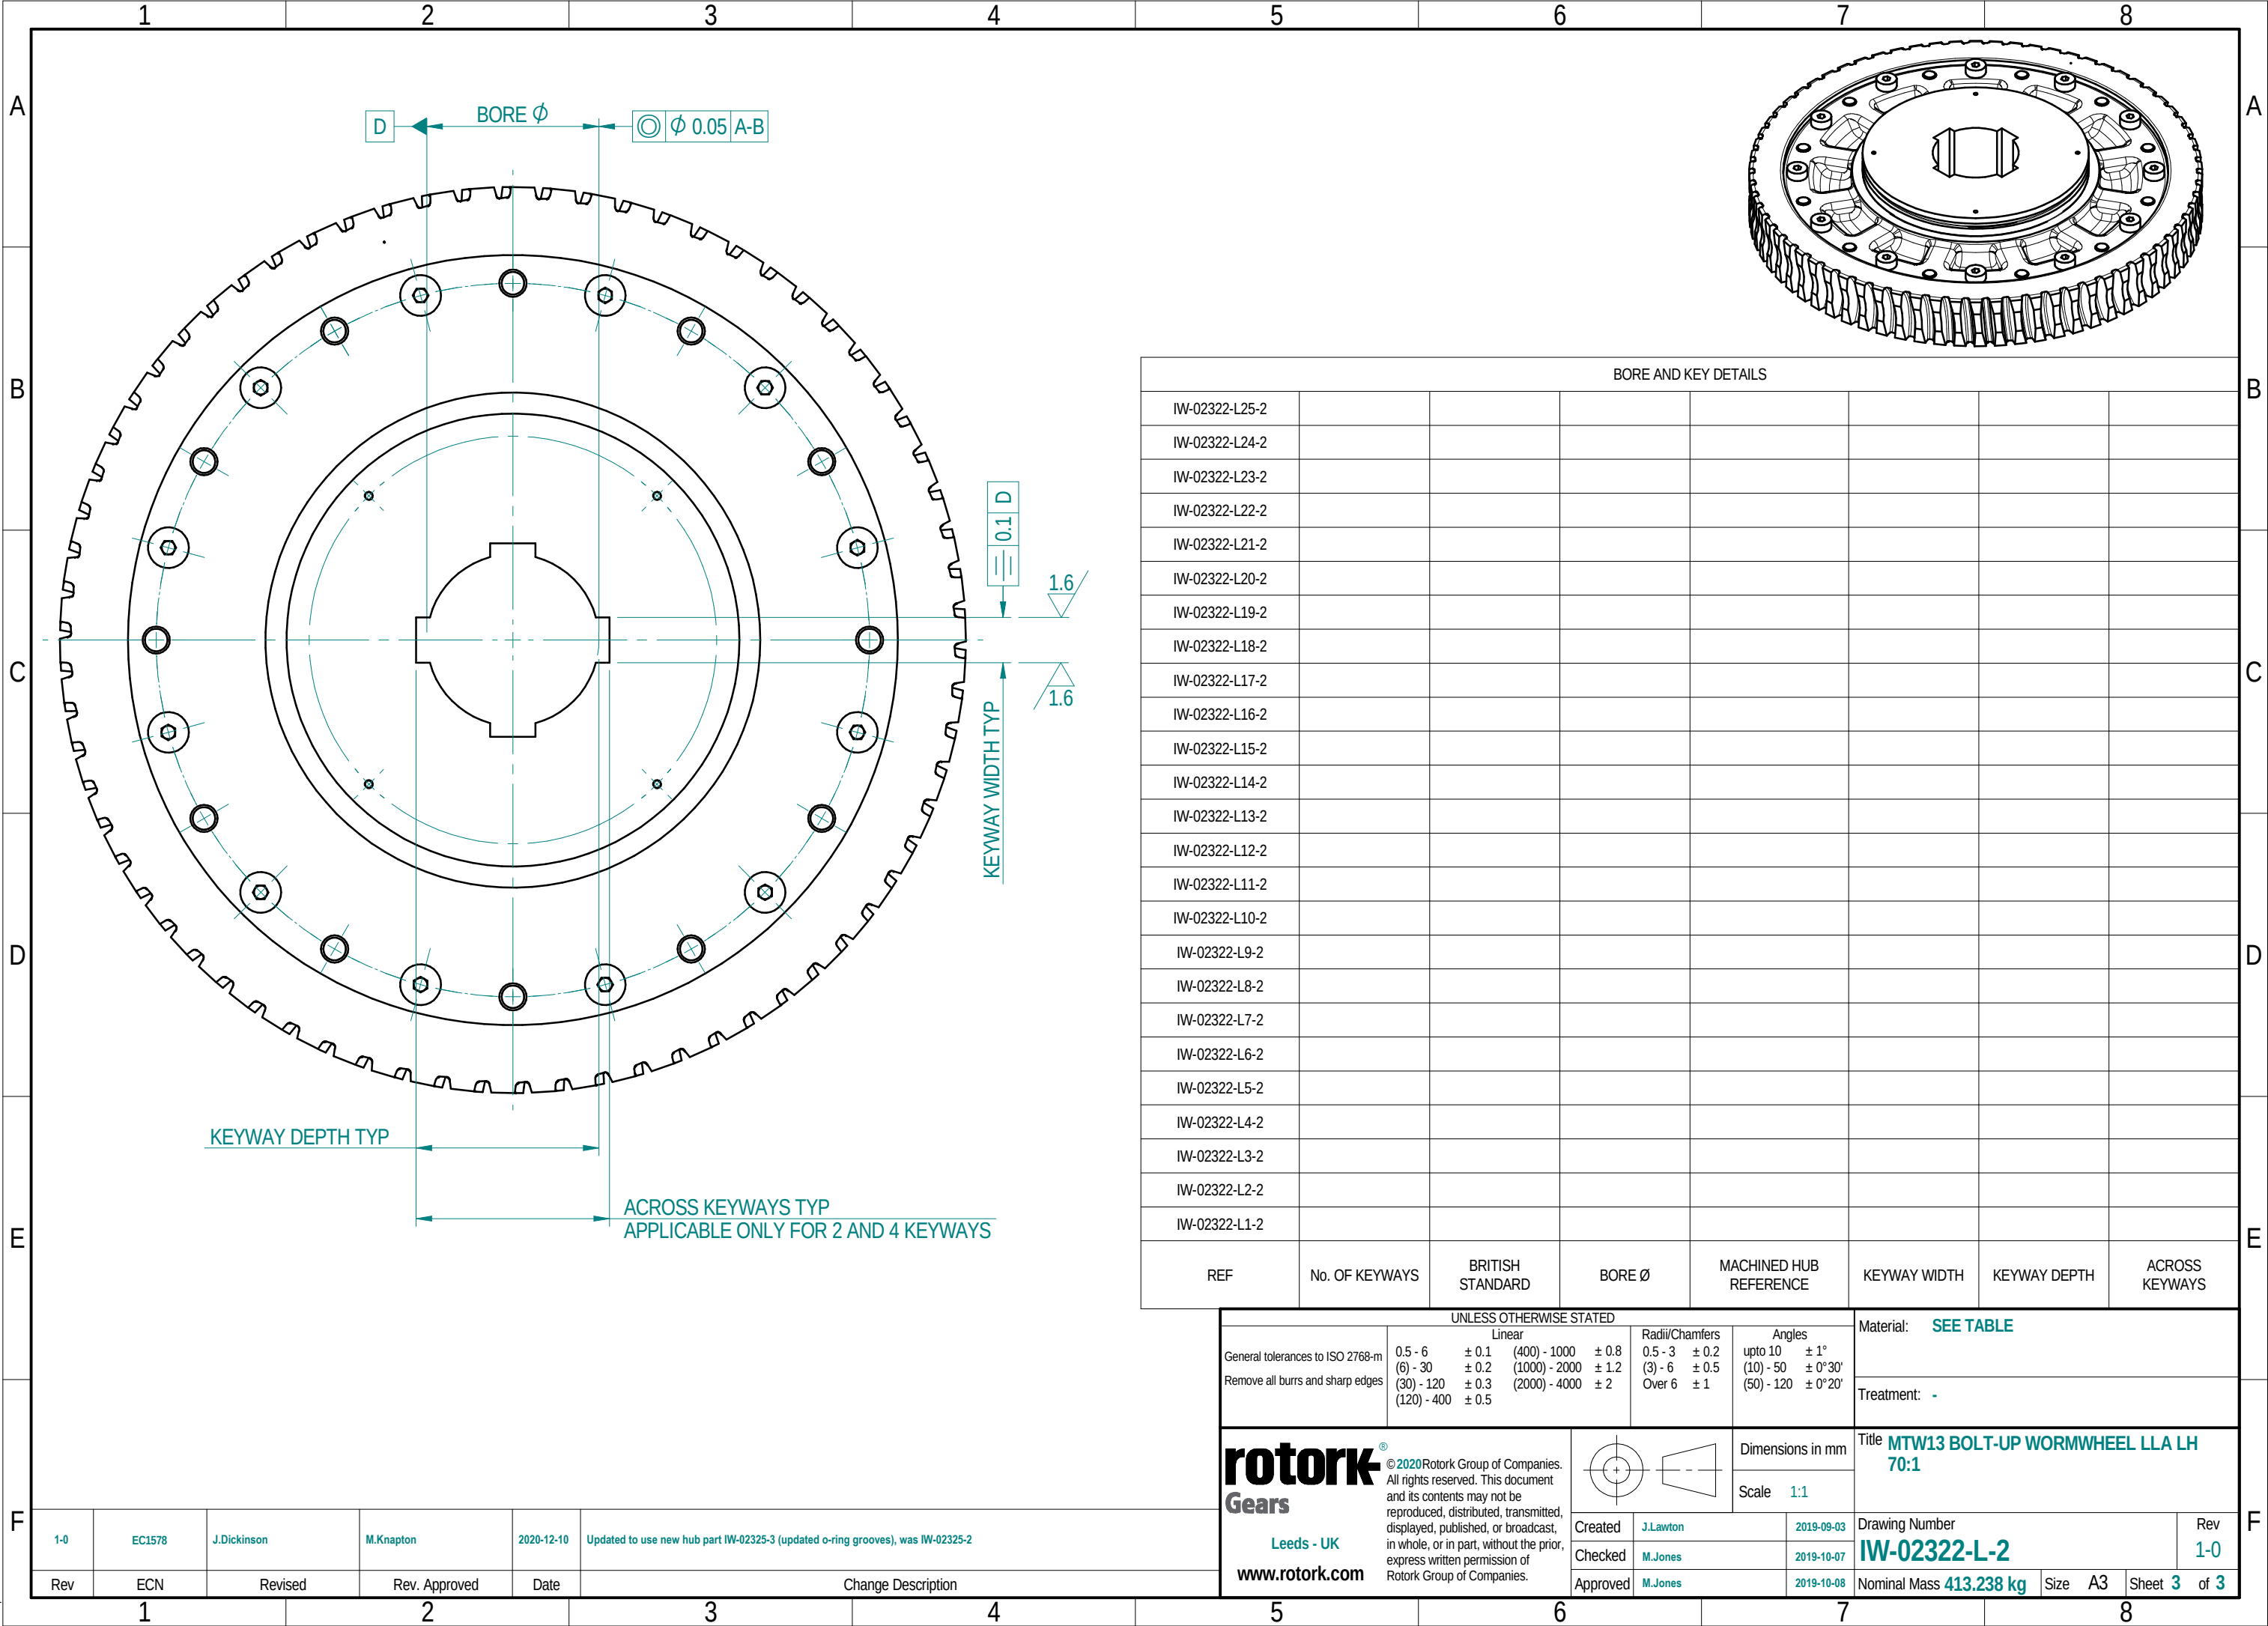

BORE AND KEY DETAILS							
IW-02322-L25-2							
IW-02322-L24-2							
IW-02322-L23-2							
IW-02322-L22-2							
IW-02322-L21-2							
IW-02322-L20-2							
IW-02322-L19-2							
IW-02322-L18-2							
IW-02322-L17-2							
IW-02322-L16-2							
IW-02322-L15-2							
IW-02322-L14-2							
IW-02322-L13-2							
IW-02322-L12-2							
IW-02322-L11-2							
IW-02322-L10-2							
IW-02322-L9-2							
IW-02322-L8-2							
IW-02322-L7-2							
IW-02322-L6-2							
IW-02322-L5-2							
IW-02322-L4-2							
IW-02322-L3-2							
IW-02322-L2-2							
IW-02322-L1-2							
REF	No. OF KEYWAYS	BRITISH STANDARD	BORE Ø	MACHINED HUB REFERENCE	KEYWAY WIDTH	KEYWAY DEPTH	ACROSS KEYWAYS

UNLESS OTHERWISE STATED					Material: SEE TABLE				
General tolerances to ISO 2768-m Remove all burrs and sharp edges	Linear		Radii/Chamfers	Angles					
	0.5 - 6 (6) - 30 (30) - 120 (120) - 400	± 0.1 ± 0.2 ± 0.3 ± 0.5	(400) - 1000 (1000) - 2000 (2000) - 4000 ± 0.8 ± 1.2 ± 2	0.5 - 3 (3) - 6 Over 6	± 0.2 ± 0.5 ± 1	upto 10 (10) - 50 (50) - 120	± 1° ± 0° 30' ± 0° 20'		
					Treatment: -				
rotork® Gears Leeds - UK www.rotork.com © 2020 Rotork Group of Companies. All rights reserved. This document and its contents may not be reproduced, distributed, transmitted, displayed, published, or broadcast, in whole, or in part, without the prior, express written permission of Rotork Group of Companies.					Title MTW13 BOLT-UP WORMWHEEL LLA LH 70:1				
					Dimensions in mm				
			Created J.Lawton		2019-09-03		Drawing Number		Rev 1-0
			Checked M.Jones		2019-10-07		IW-02322-L-2		
Approved M.Jones		2019-10-08		Nominal Mass 413.238 kg		Size A3	Sheet 3 of 3		