


IW8A212-23	
ISSUE	ALTERATIONS
A	ORIGINAL ISSUE (SEE CN1497)

ISSUE	ALTERATIONS
A	ORIGINAL ISSUE (SEE CN1497)

I	O 0.25
---	--------

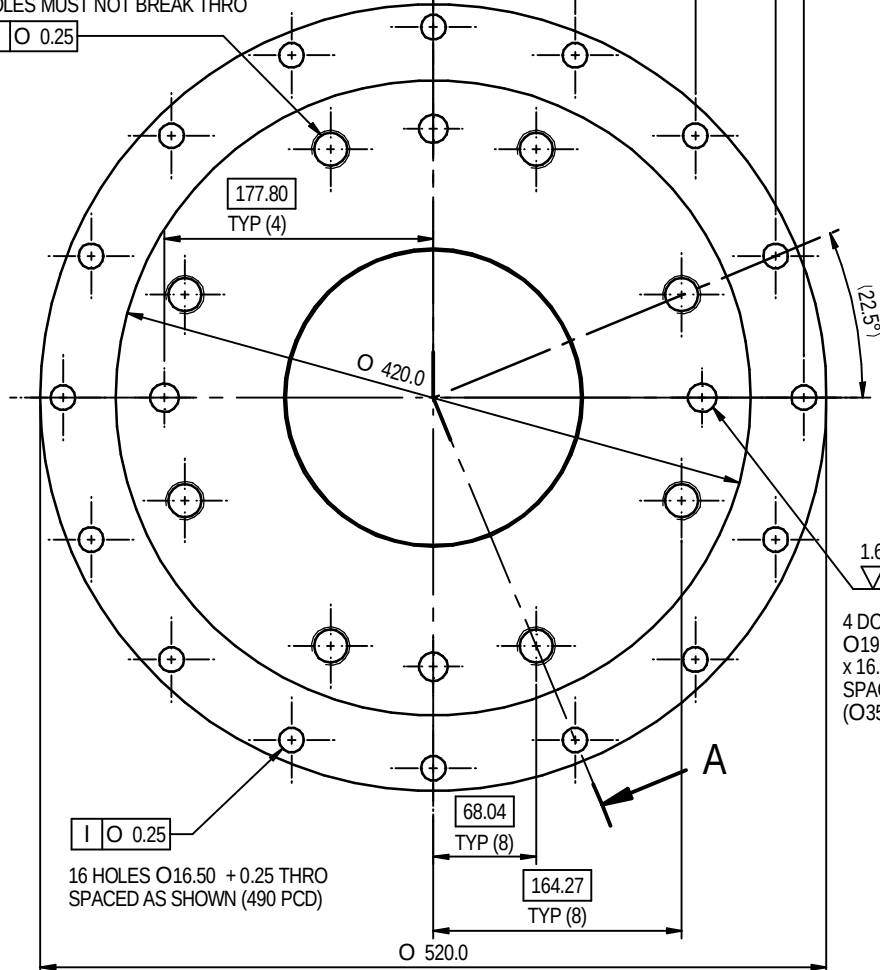

I	O 0.25
---	--------

16 HOLES Ø16.50 + 0.25 THRO
SPACED AS SHOWN (490 PCD)

ROTORK GEARS
REGINA HOUSE
RING ROAD
BRAMLEY
LEEDS
WEST YORKSHIRE

REGINA HOUSE
RING ROAD
BRAMLEY
LEEDS
WEST YORKSHIRE

PROJECT:- REF T23578 IW8 QUARTER TURN GEARBOX

THIRD ANGLE PROJECTION
DO NOT SCALE

(64)

n 0.05 A

n 0.05 A

32.90
32.85

3.2

3.2

31.00
30.50

16.00 ±0.50

16.00
15.50

3.2

3.2

B

3.2

a 0.05 A

3.2

18.0

C

A

205.26
204.65

195.17
195.10

230.0

250.0

287.50
287.00

449.56
449.34

459.95
459.89

1.6

3.2

3.2

1.6

I 0.15

LEVEL HOLES
0.0 +0.03
0.0 +2.00 DEEP
ED AS SHOWN
5.60 P.C.)

FOUNDURY LOGO
AND MELT DATE
TO APPEAR INSIDE
A 287 DIA IN LETTERS
2.0 HIGH MAX

32.0
CAST

54.50
53.50

UNLESS OTHERWISE SPECIFIED

1. ALL DIMENSIONS TO CENTER UNLESS OTHERWISE SPECIFIED
2. ALL CAST DIMENSIONS TO CENTER UNLESS OTHERWISE SPECIFIED
3. CAST FACE FINISH
4. ALL CAST ROUNDS TO R0.5
5. REMOVE ALL BURRS
6. MACHINING

SECTION A-A

DRAWN:- J DODD 21/12/2010

CHECKED:- J PRIESTLEY 17/01/2011



HEAT TREATMENT	PROTECTIVE TREATMENT
----------------	----------------------

	SUITABLY PROTECT FOR STORAGE
--	---------------------------------

BASEPLATE

IW8A212-23

1. ALL DIMENSIONS IN MILLIMETRES
2. ALL CAST DIMENSIONS TO ISO 8062 CT9
3. CAST FACES TO HAVE 2° DRAFT $\pm 1^\circ$ TAPER $\pm$
4. ALL CAST RADII 10.0
5. REMOVE ALL SHARP EDGES 0.50 MAX M/C
6. MACHINING ALLOWANCE TO ISO 8062 RMA 3.0 (F) TO BE CAST ON
7. CAST SURFACE FINISH TO BE OF GOOD FOUNDRY PRACTICE
8. ALL GEOMETRIC TOLERANCES ARE T.I.R.
9. GROOVE RADII R0.20+0.20 EXT. R1.00 MAX INT.



DETAIL C (1:2)

1.50
1.00 x 45vu5v
TYP (2)



DETAIL B (1:2)

